

Project Address: _____

Contact Person Name/Number: _____

CITY OF KATY
CANE ISLAND MASTER PLANNED COMMUNITY DEVELOPMENT
RESIDENTIAL PROJECT CHECKLIST

ALL PLANS MUST BE STAMPED APPROVED BY THE RISE COMMUNITIES DESIGN REVIEW COMMITTEE BEFORE BEING SUBMITTED TO THE CITY OF KATY. PLEASE CONTACT MATHEW LARSON, 702-990-2106, E-MAIL: matt@risecommunities.net

- I. **ADMINISTRATION OFFICE:** 910 Avenue C, Katy, Texas 77493 (281) 391-4800
Check with City Secretary's Office for any applicable requirements (zoning, platting, drainage impact assessment fees, etc.)
- II. **PERMITS DEPARTMENT:** 910 Avenue C, Katy, Texas 77493 (281) 391-4830
 - 1. Contractor Registration Form (Completed/Signed)
 - a. Copy of Texas Drivers License
 - b. Proof of General Liability Insurance, minimum \$300,000 showing City of Katy with our address as Certificate Holder.
 - c. Contractor Registration Fee \$100.00

NOTE: Water Application and Deposit Required Prior To Permits Being Released.

III. **APPLICATIONS:**


TWO COMPLETE SETS OF PLANS/SPECS

- | | | |
|---------------|--|---------------|
| <u> </u> | a. Plot Plan – size: 8 1/2 x11 or 8 ½ x 14 | <u> </u> |
| <u> </u> | b. Foundation Plan signed/sealed by Texas-Licensed Engineer | <u> </u> |
| <u> </u> | c. Energy Code Report | <u> </u> |
| | | |
| <u> </u> | 1. <u>Building Permit Application (Completed/Signed)</u> | <u> </u> |
| <u> </u> | 2. <u>Flatwork Permit Application (Completed/Signed)</u> | <u> </u> |
| <u> </u> | 3. <u>Water and Sewer Applications (Completed/Signed)</u> | <u> </u> |
| <u> </u> | 4. <u>Curb Cut/Culvert Application (Completed/Signed)</u> | <u> </u> |
| <u> </u> | 5. <u>Request for Temporary Utilities Form</u> | <u> </u> |
| <u> </u> | 6. <u>Floodplain Development Permit Application</u> | <u> </u> |

PLAN REVIEW NOTES: _____

APPLICANT SIGNATURE _____ PRINT NAME _____

RESIDENTIAL

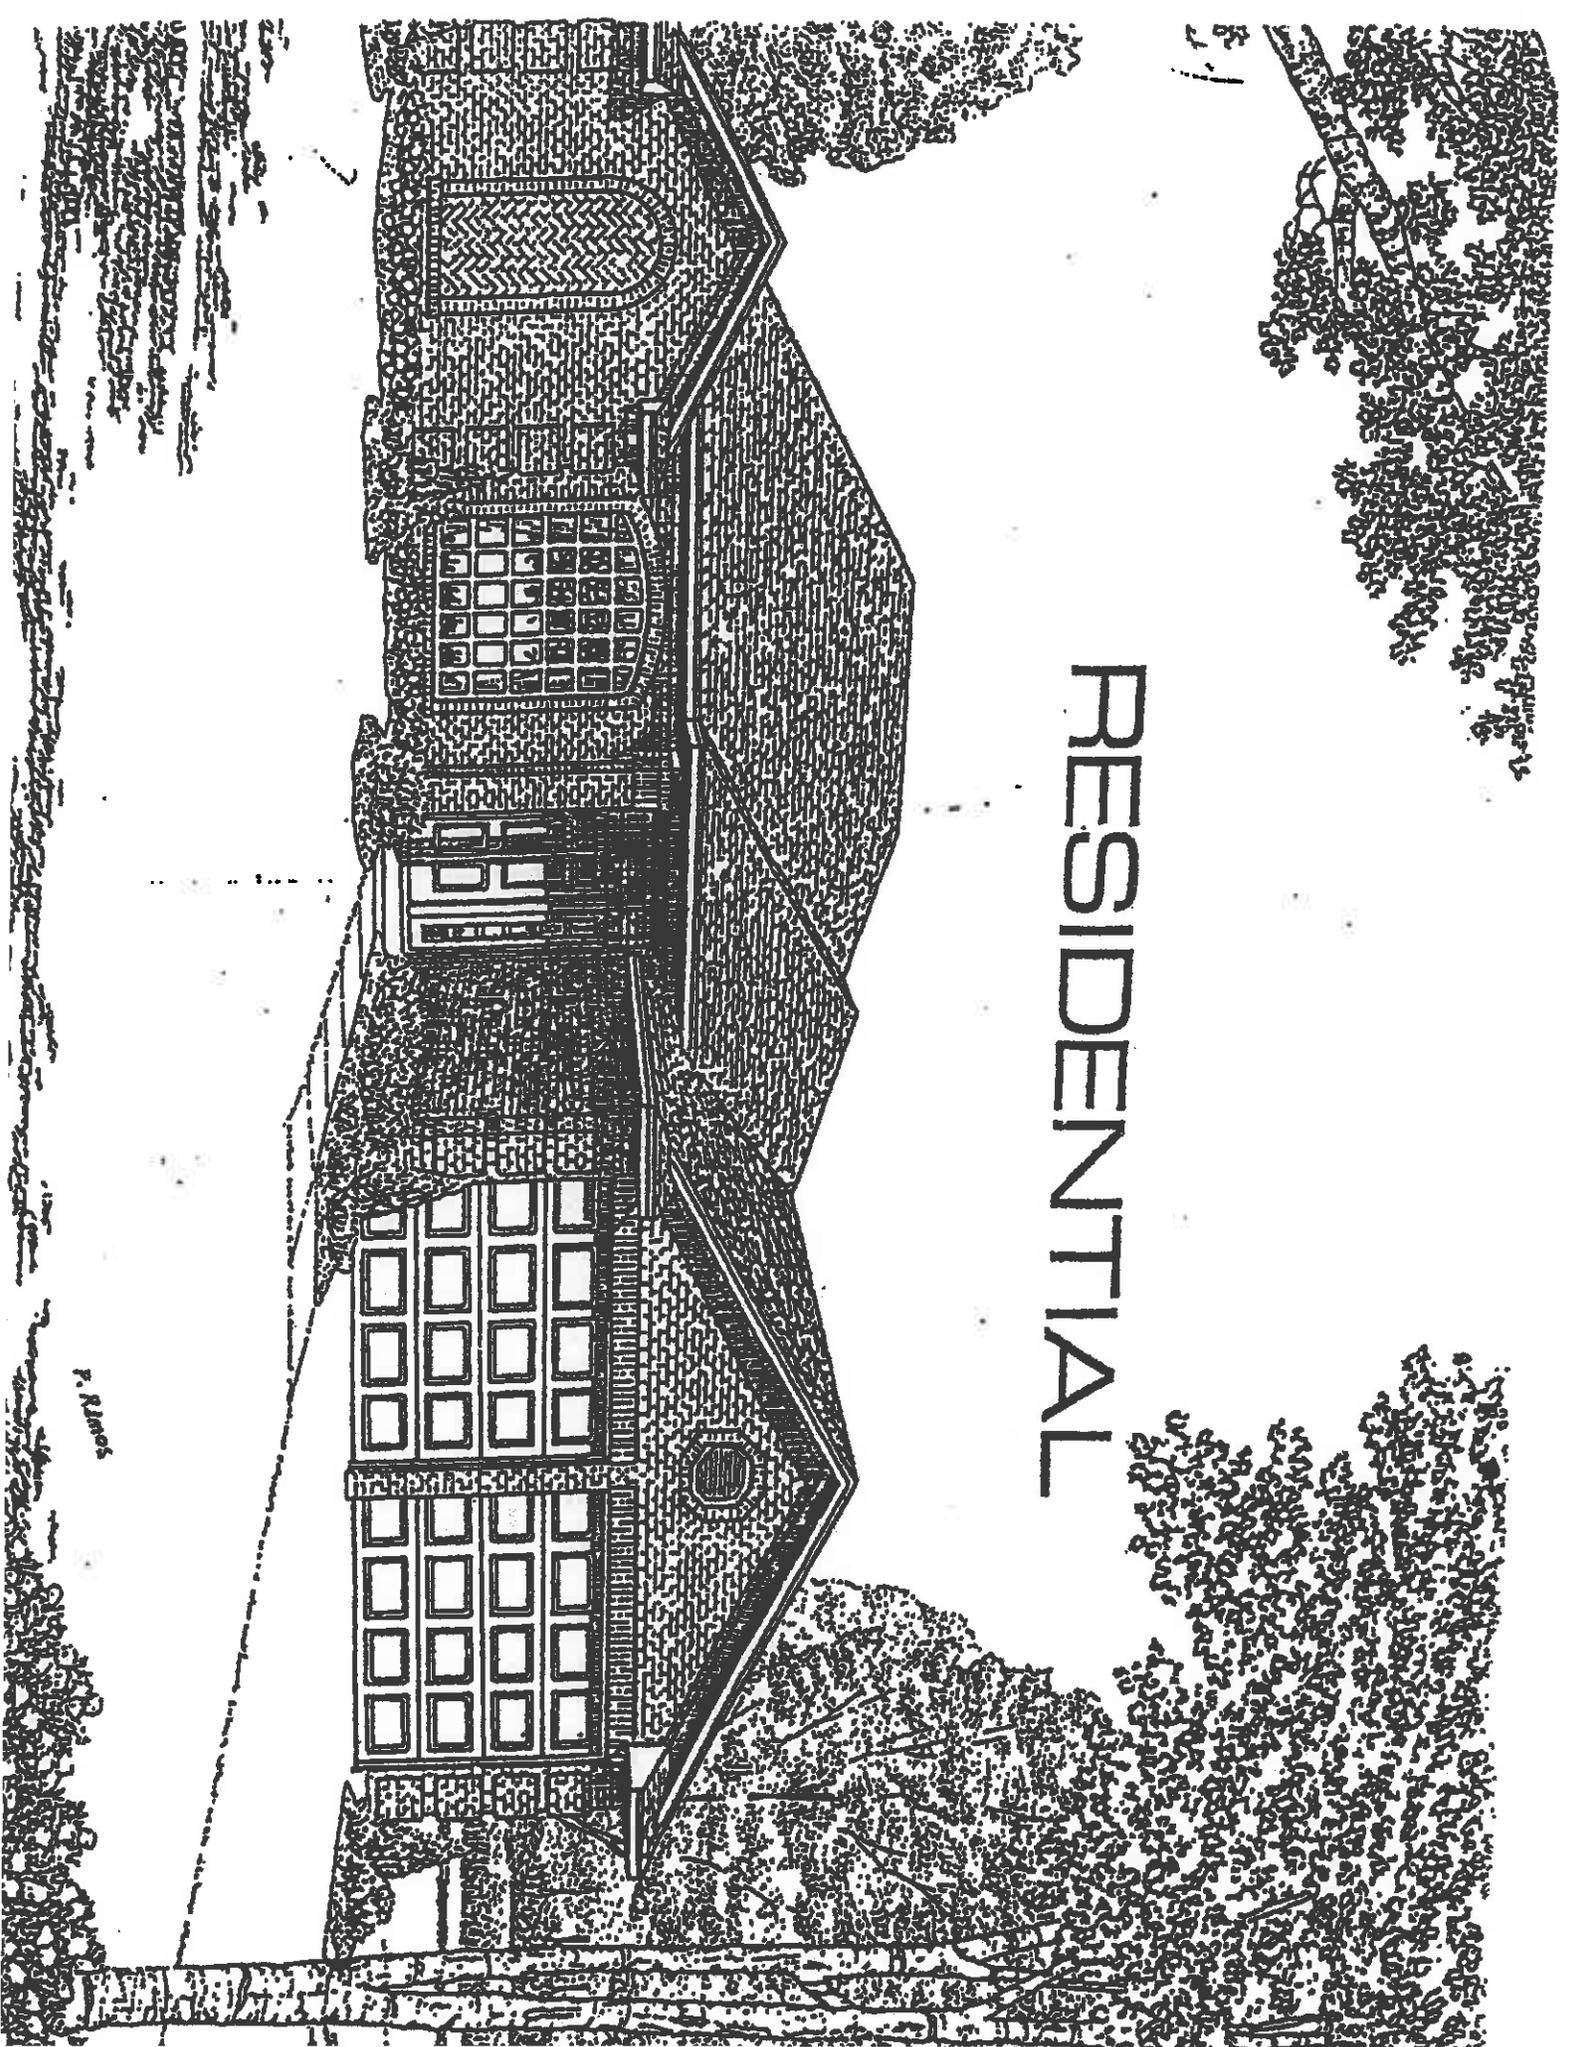

P. Ramos

CITY OF KATY

GUIDE TO RESIDENTIAL BUILDING PERMIT REQUIREMENTS

Prior to the start of construction, the following must be submitted and approved, and all applicable fees paid prior to any work being performed by Builder and/or Subcontractors. The City of Katy is a zoned city and all land use must comply with the city's zoning ordinance.

A. Building Permit Application:

- Two (2) complete sets of plans and specs including a plot plan. Plans have to include elevations, floor plan, rafter plan, floor and/or ceiling joist plan, wall sections, electrical, HVAC, and plumbing plans. The rafter, wall section, floor and/or ceiling joist plan have to show grade of lumber to be used, span, nominal size of lumber, and what the lumber will be placed on center
- Two (2) foundation plans signed and sealed by Texas-Licensed Engineer.
- Builder must submit two (2) sets of the 2012 International Residential Energy Code compliance forms to the City for residential building. The Builder must supply paperwork from a third party source verifying that the project is in compliance with the Residential Energy Code. The State of Texas has adopted the energy code for new residential buildings and additions to such buildings. For more information regarding the energy code to www.energycodes.gov. Also, it is the Builder's responsibility to contact a Certified Residential Energy Code Inspector to conduct all of the energy code inspections, and to submit a copy of the Energy Code Report to the permit office prior to scheduling finals.
- Driveway/sidewalk/walkway/patio Application (Flatwork Permit)
- Curb Cutting Application or Culvert Application with copy of plot plan showing location of curb cut or culvert.
- Water and Sewer Tap Applications
- Floodplain Development Permit Application
- Request for Temporary Utilities Form
- All contractors must provide the City of Katy with a Certificate of General Liability Insurance of at least \$300,000. It must be faxed to the City of Katy, Fax – 281-391-4834 by the insurance company, and list the City of Katy, 910 Avenue C, P.O. Box 617, Katy, TX 77492 as the Certificate Holder, and mail the original.

- **If applicable, Ord. No. 1104 requires a drainage impact fee of \$2,500 per acre against any new development. If the developer elects to install a detention pond instead of paying the drainage impact fee, the plans for such pond must be drawn and sealed by a professional engineer registered with the State of Texas. The plans must be reviewed and approved by the City of Katy engineer and will be inspected when the project is completed.**

PERMIT FEES ARE PAID UPON APPROVAL OF THE ABOVE APPLICATION AND PLAN REVIEW. Two separate checks are required for the payment of permit fees, both payable to the City of Katy. Building Permit and Flatwork Permit fees are required to be paid on one check and the water and sewer tap fees are to be on a separate check.

NOTE: A form survey and if applicable an elevation certificate with elevations must be submitted and approved prior to scheduling the foundation inspection. Enclosed is information on what is required to be on a form survey or final survey.

REQUIREMENTS ON JOB SITE:

- 1. One set of approved plans must be on site during inspections. On any structure the address is required. The address must be visible from the street and must be maintained throughout the building process. If an inspection is requested and the structure is not addressed as referenced above, the inspection will not be conducted and a reinspection fee will have to be paid before the inspection can be requested again.**
- 2. It is the Contractors responsibility to be familiar with local amendments covering any code changes or materials not allowed in the City of Katy.**
- 3. Building Permit must be displayed on the job site.**
- 4. Port-a-cans must be on job site, preferably behind the building.**
- 5. ONLY the permit holder will be allowed to schedule inspections and call for finals.**
- 6. A CERTIFICATE OF OCCUPANCY MUST BE ISSUED BY THE CITY OF KATY PRIOR TO ANY STRUCTURE BEING OCCUPIED. IF A CERTIFICATE OF OCCUPANCY HAS NOT BEEN ISSUED AND THE STRUCTURE BECOMES OCCUPIED, A CITATION WILL BE ISSUED TO THE BUILDER FOR EACH DAY IT IS OCCUPIED AND UTILITIES WILL BE DISCONNECTED.**



SCHEDULING OF INSPECTIONS

This notice is to inform you that due to the volume of inspections being requested in our City, inspection scheduling will be as follows:

If an inspection is requested before 2:00 PM any given day, the inspection will be conducted the following business day between 7:00 AM and 3:30 PM, **SCHEDULE PERMITTING.**

If an inspection is requested after 2:00 PM any given day, the inspection will be conducted in two (2) business days between 7:00 AM and 3:30 PM.

We apologize in advance for any inconvenience, but we are no longer able to schedule AM or PM inspections. No set time can be given except for residential or commercial **FINALS**.

****If an inspection needs to be cancelled for any reason, the cancellation needs to be called in before 7:30 AM on the day of the scheduled inspection. If it is after hours, please call 281-391-4830 and leave a voice mail.**

If the inspector arrives at a job site and the work is not ready for inspection or incorrect it will be turned down. If a red tag is issued, a re-inspect fee will have to be paid (cash/check) **PRIOR** to rescheduling the same inspection. If the fee is paid before 2:00 PM the reinspection will be conducted the following business day. If the fee is paid after 2:00 PM, the reinspection will be conducted in two (2) business days. **IT IS VERY IMPORTANT TO MAKE SURE YOU ARE GOING TO BE READY FOR THE INSPECTION BEFORE YOU SCHEDULE YOUR INSPECTIONS.**

NOTE: Foundations and Final Inspections

BEFORE A FOUNDATION OR FINAL INSPECTION CAN BE SCHEDULED, ALL REQUIRED PAPERWORK MUST BE SUBMITTED FOR APPROVAL. THE INSPECTOR HAS 48 HOURS TO APPROVE PAPERWORK. ONCE THE PAPERWORK IS APPROVED, THE CONTRACTOR MUST SCHEDULE A DATE FOR THE INSPECTION WITH THE PERMIT CLERKS.

SIGNATURE

PRINT NAME

COMPANY NAME

DATE

PRE-CONSTRUCTION INFORMATION

GENERAL INFORMATION:

- _____ The City of Katy is currently under the 2012 International Building Codes and the 2011 National Electric Code.
- _____ The address must be posted at the job site for the duration of the project. If the address is not posted, the inspections will be put on hold until the address is posted and is visible from the street. The orange card must be posted at the job site at all times.
- _____ Do not differ from the plans that were submitted and approved by the City. All changes must be submitted to the city for approval.
- _____ A Certificate of Occupancy is required for all new residential homes and all businesses **before the building can be occupied**. Do not move any furniture, fixtures, etc. into the building until the final inspections have passed.
- _____ Aluminum wiring cannot be used for branch circuits.
- _____ Pex piping with a material designation code of 5X06 or greater is allowed for plumbing only. X = any level of U.V. protection.
- _____ All contractors must register with the City of Katy. All license holders must appear in person the first time they register to show their licenses.
- _____ **BEFORE ANY CONCRETE CAN BE POURED**, an inspection must be scheduled and receive a green tag. An approved washout area must be on site or trucks must have washout systems.
- _____ Our office does not accept credit cards, only cash or checks.
- _____ Contractors must have licensed workers and placards on their vehicles.

INSPECTIONS:

- _____ If an inspection is requested by 2:00, the inspection will be conducted the following business day, usually between 7:00 AM and 3:30 PM. The City of Katy does not perform same day inspections. If an inspection is requested after 2:00 PM, the inspection will be conducted in two (2) business days. No set time can be given for inspections except for finals. When you call the office to schedule an inspection, you will need the permit number, address and type of inspection. The only people that can call for inspections, are the ones that have been authorized by the company or license holder on the contractor registration form.
- _____ The inspector will leave a tag at the job site to let you know the result of the inspection. If you receive a **green tag**, the inspection passed and you may proceed. If you receive a **yellow tag**, you must make the corrections and call the office for a re-inspection. You have **10 days** to call for a re-inspect. If you do not call within 10 days,

a re-inspect fee will be assessed and you will need to pay the fee before you can reschedule. If you receive a red tag, a re-inspect fee will have to be paid (cash or check only) prior to rescheduling the inspection.

FORM SURVEYS ARE REQUIRED BEFORE FOUNDATION INSPECTIONS WILL BE SCHEDULED. An elevation certificate will also be required if the property is within the flood zone. We have 48 hours to approve form surveys and elevation certificates, so please remember to submit the form surveys and elevation certificates to our office at least 48 hours before you want the inspection for the foundation inspection.

An inspection is required before any concrete can be poured.

It is the responsibility of the general contractor to obtain a third party certified energy code inspector to conduct all energy code inspections and finalize all reports. A signed final report stating it was inspected and approved will need to be submitted with the final paperwork.

FINALS:

Our office has 48 hours to review and approve the required final paperwork. Please remember to submit your final paperwork to our office at least 48 hours before you want to schedule your final inspection. You will need to submit the following **original paperwork** to our office before final inspections can be scheduled:

Final survey, final elevation certificate (if applicable), post tension foundation cable report (if applicable), and the final energy code report (2012) – for commercial projects we will also need a copy of the sales tax certificate listing the address of the business located in Katy and a final “as-built” CD

All sub-contractors that have a permit must call the office for their final inspection. Once all required inspections have passed, final paperwork is approved and all sub-contractors call for their final inspections, the general contractor must call the office to schedule the final inspection. **ALL FINALS WILL BE DONE AT ONE TIME.**

I have read and understand the above instructions. I acknowledge that I have received a copy of the local amendments and the list of required inspections. I understand that additional inspections may apply depending on the type of project.

SIGNATURE

DATE

PRINTED NAME

COMPANY NAME

FEE DOUBLE IF WORK IS PERFORMED WITHOUT PERMIT BEING ISSUED



NON-TRANSFERABLE
NO REFUNDS
EXPIRES IN 180 DAYS

Permits and Inspections Department
Email: permits.inspections@cityofkaty.com

APPLICATION FOR BUILDING PERMIT

BUILD _____ REPAIR _____ DEMOLITION _____ MOVE _____ OTHER _____

OCCUPANCY USE: RESIDENTIAL _____ COMMERCIAL _____

DATE OF APPLICATION: _____

PROJECT ADDRESS: _____

LOT: _____ BLOCK: _____ SUBDIVISION: _____ COUNTY: _____

LEGAL PROPERTY OWNER: _____ Phone # _____

Owner's Address/City/State/Zip: _____

CONTRACTOR CO.: _____ SUPERINTENDENT'S NAME _____

Address/City/State/Zip: _____

Contractor's Office #: _____ CELL #: _____ EMAIL/FAX: _____

DESCRIPTION OF PROJECT: _____

New Construction _____ Addition _____ Strg Bldg _____ Patio Cover _____ Remodel _____ Other _____

Stories _____

Foundation _____

Exterior Walls _____

Interior Walls _____

Floor _____

Roof _____

Cars Garage _____

Attached/Detached _____

SQUARE FOOTAGE IMPROVEMENTS

Living Area: _____

Screen Porches: _____

Open Porches: _____

Garage: _____

Patio, Etc.: _____

TOTAL SQ. FT. _____

VALUE OF WORK: \$ _____

NOTE: Water Application and Deposit Required Prior To Permit Being Released

NOTICE

Separate permits are required for electrical, plumbing, air conditioning & heating. This permit becomes null and void if work or construction authorized is not commenced within six (6) months, or if construction or work is suspended or abandoned for a period of six (6) months at any time after work is commenced. I hereby certify that I have read and examined this application and know the same to be true and correct. All provisions of laws and ordinances governing this type of work will be complied with whether or not specified herein. The granting of a permit does not presume to give authority to violate or cancel the provisions of any other State or Local laws regulating construction or the performance of construction.

REINSPECT FEES:

YELLOW TAG NO FEE IF REINSPECTED IN 10 DAYS
AFTER 10 DAYS \$15.00 FEE APPLIES

RED TAG \$15.00 1ST CORRECTION, FEE INCREASES IN
INCREMENTS OF \$15.00 EACH ADD'L REINSPECTION
(Ordinance 2240 adopted 11/10/03)

SEE REVERSE SIDE FOR FEES

APPLICATION FEE \$ 10.00

PLAN CHECK FEE PERMIT FEE

\$ _____ \$ _____

I HEREBY ACCEPT ALL CONDITIONS SET ABOVE AND CERTIFY THAT ALL STATEMENTS MADE HEREIN ARE TRUE. APPLICANT ACKNOWLEDGES THAT SIGNATURES TRANSMITTED ELECTRONICALLY OR BY FACSIMILE TRANSMISSION HAVE THE SAME LEGAL EFFECT AS ORIGINALS.

APPLICANT ORIGINAL SIGNATURE _____ Printed Name _____ Date _____

(BELOW FOR OFFICE USE ONLY):

APPROVED BY: INSPECTOR _____ DATE APPROVED: _____

BUILDING PERMIT FEES & CALCULATIONS

<u>RESIDENTIAL</u>	<u>COMMERCIAL</u>
	(PROJECT VALUATION DATA FEE)
Base Fee = \$ 100.00 Total Sq. Ft. _____ x .08 sq. ft. = + _____ APPLICATION FEE = + 10.00 TOTAL = \$ _____	LESS THAN \$1,000.00 = \$15.00 \$1,001.00 - \$50,000.00 = \$15.00 PLUS \$5.00 per \$1,000.00 over \$1,000.00/or fraction of a \$1,000.00 = + _____ TOTAL = \$ _____
Remodel of Existing Structure = \$ 25.00 APPLICATION FEE = + 10.00 TOTAL = \$ 35.00	\$50,001.00 - \$100,000.00 = \$260.00 PLUS \$4.00 per \$1,000.00 over \$50,000.00/or fraction of a \$1,000.00 = + _____ TOTAL = \$ _____
Room Addition/Garage < 500 sf = \$ 50.00 Total Sq. Ft. _____ x .08 sq. ft. = + _____ APPLICATION FEE = + 10.00 TOTAL = \$ _____	\$100,001.00 - \$500,000.00 = \$ 480.00 PLUS \$3.00 per \$1,000.00 over \$100,000.00/or fraction of a \$1,000.00 = + _____ TOTAL = \$ _____
Room Addition/Garage > 500 sf = \$ 100.00 Total Sq. Ft. _____ x .08 sq. ft. = + _____ APPLICATION FEE = + 10.00 TOTAL = \$ _____	\$500,001.00 - UP = \$1,860.00 PLUS \$2.00 per \$1,000.00 over \$500,000.00/or fraction of a \$1,000.00 = + _____ TOTAL = \$ _____
Storage Bldg < 120 sq. ft. = \$ 25.00 (Wind load 105 mph) APPLICATION FEE = + 10.00 TOTAL = \$ 35.00	**PLAN CHECK FEE=50% OF ABOVE VALUATION (To be paid cash or check upon application) PLAN CHECK FEE = \$ _____
Storage Bldg 120' to 500 sq. ft. = \$ 50.00 (Wind load 105 mph) APPLICATION FEE = + 10.00 TOTAL = \$ 60.00	BUILDING PERMIT FEES - ADD THE FOLLOWING: TOTAL VALUATION FEE ABOVE = \$ _____ TOTAL PLAN CHECK FEE ABOVE = \$ _____ APPLICATION FEE = + 10.00 TOTAL PERMIT FEE \$ _____
Patlo Covers w/no walls = \$ 25.00 APPLICATION FEE = + 10.00 TOTAL = \$ 35.00	***DRAINAGE IMPACT FEE*** _____ No. Acres x \$2,600.00/acre = \$ _____ (FEE PAID TO CITY SECRETARY/ADMINISTRATION)
RESIDENTIAL Re-roof = \$ 15.00 APPLICATION FEE = + 10.00 TOTAL = \$ 25.00	COMMERCIAL Re-roof \$ 50.00 APPLICATION FEE + 10.00 TOTAL \$ 60.00
Moving House/Structure = \$ 100.00 APPLICATION FEE = + 10.00 TOTAL = \$ 110.00	Moving Building/Structure = \$ 100.00 APPLICATION FEE = + 10.00 TOTAL = \$ 110.00
Demolition up to 100,000 cu ft = \$ 50.00 >100,000 cu ft @ .50/1,000 cu ft = + _____ APPLICATION FEE = + 10.00 TOTAL = \$ _____	Demolition up to 100,000 cu ft = \$ 50.00 >100,000 cu ft @ .50/1,000 cu ft = + _____ APPLICATION FEE = + 10.00 TOTAL = \$ _____

REBATE PROGRAM - ORDINANCE NO. 418 WATER/SEWER:

_____ Ordinance No. 454 (Katy Hockley from Morton to Clay)
 _____ Ordinance No. 658 (N. Elder E. along Morton to Heritage Park West)

_____ Ordinance No. 494 (Katy Medical Center Area)
 _____ Ordinance No. 659 (Katy West Business Park)

FEE'S DOUBLE IF WORK IS PERFORMED WITHOUT PERMIT BEING



NON-TRANSFERABLE NO REFUNDS EXPIRES IN 180 DAYS

Permits/Inspections Department
Website: www.cityofkaty.com
Email: permits.inspections@cityofkaty.com

APPLICATION FOR FLATWORK PERMIT

NEW INSTALL REPLACEMENT

OCCUPANCY USE: RESIDENTIAL COMMERCIAL

DATE OF APPLICATION:
PROJECT ADDRESS:
LOT: BLOCK: SUBDIVISION: COUNTY:
LEGAL PROPERTY OWNER:
Owner's Address/City/State/Zip:
Owner's Phone #:
CONTRACTOR'S NAME:
Address/City/State/Zip:
Contractor's Phone #: EMAIL:
DESCRIPTION OF PROJECT:

NOTE: DRAINAGE AND UTILITY EASEMENTS MUST BE SHOWN ON SITE PLAN OR APPLICANT MUST PROVIDE SURVEY PRIOR TO PERMIT APPROVAL

SCHEDULE OF FEES:

Table with 2 columns: Fee Description and Amount. Includes items like First Driveway, Sidewalk, Parking/Paving, and Application Fee.

*See Katy City Code, Chapter 3, Section 11, Exhibit A(11) for specifications

REINSPECTION FEES: (if required)
Reinspection fee is \$15.00 for the first reinspection, and the fee increases in increments of \$15.00 for each subsequent reinspection. (Ordinance 2240 adopted 11/10/03)

I HEREBY ACCEPT ALL CONDITIONS SET ABOVE AND CERTIFY THAT ALL STATEMENTS MADE HEREIN ARE TRUE.

APPLICANT ORIGINAL SIGNATURE PRINTED NAME DATE

Approved By: Date:

NOTE: Inspections called in before 2:00pm will be scheduled for next business day, after 2:00 pm will be schedule for two (2) business days. (revised 1-8-15)

STANDARDS FOR CONCRETE & STEEL (RESIDENTIAL & COMMERCIAL)

RESIDENTIAL

- 1) **PUBLIC SIDEWALKS:** 4ft. wide, 4in. thick minimum concrete at 2500 PSI reinforced with #3 rebar, 18" OCEW supported, dowels @ 18" OC
- 2) **WALKWAYS:** Minimum 2ft wide, 3 ½ in. thick minimum concrete at 2500 PSI reinforce with # 6 wire mesh or #3 rebar on 18 in. centers, dowels @ 18in. OC.
- 3) **DRIVEWAYS:** 3 ½" thick minimum concrete at 2500 PSI reinforced with minimum #6 wire mesh or #3 rebar on 18in. centers, dowels @ 18in. OC
- 4) **RADIUS:** 2ft to 5ft
- 5) **PATIO SLABS:** 4in. thick slab shall be reinforced with #3 rebar on 16in. centers. If attaching to existing concrete, add dowels @ 18in. OC
- 6) **APPROACH:** 6in. thick minimum concrete at 2500 PSI to property line
 - a) #3 rebar at 18in. OCEW and supported
 - b) Sleeve dowels at existing concrete street (unless street is asphalt) and attach two each #3 rebar running parallel to the street and tied to the dowels

****MUST COMPLY WITH ALL NOTES****

COMMERCIAL

- 1) **COMMON DRIVE AREA SPECIFICATIONS:** 6in. thick minimum concrete at 3000 PSI, #3 rebar at 18in OCEW, dowels at 18in OC
- 2) **PARKING AREA SPECIFICATIONS:** 5in. thick minimum concrete at 2500 PSI, #3 rebar at 24in. OCEW, dowels @ 18in. OC
- 3) **RADIUS:** 5ft to 10ft
- 4) **APPROACH:** 6in. thick minimum concrete at 3000 PSI to property line
 - a) #3 rebar at 18 OCEW and supported
 - b) Sleeve dowels at existing concrete street (unless street is asphalt) and attach two (2) each #3 rebar running parallel to the street and tied to the dowels.

****MUST COMPLY WITH ALL NOTES****

NOTES

- A. **FULL EXPANSION JOINTS:** Pressure treated or sound heart redwood ¾" thick with OA 90 asphalt joint seal
 1. 10ft OC
 2. 12in. dowels, 18in. OC
 3. 6in. into existing slabs and epoxyed
 4. Sleeve exposed sides of dowels
- B. **PARTIAL EXPANSION JOINTS:** 1in x 2in expansion joint -pressure treated or sound heart redwood with steel running continuously underneath (no dowels needed)
 1. 10ft OC
- C. **CONTROL JOINTS:** Saw cut between every expansion joint 1/2in x 1/2in.
- D. **DOWELS:** (load transmission devices) #3 rebar, 12in long, 18in OC
 1. 6in into existing slabs and epoxyed
 2. Sleeve exposed sides
- E. **PROPER STEEL SUPPORT & PLACEMENT:**
 1. 2in. from earth (dirt)
 2. 1/2in from all form boards
 3. All steel tied
 4. Only non-corrosive steel supporting steel, or must use approved chairs, concrete bricks, or other approved material

FEE'S DOUBLE IF
WORK IS
PERFORMED
WITHOUT PERMIT
BEING ISSUED



NON -
TRANSFERABLE
NO REFUNDS
EXPIRES IN 180 DAYS

Permits and Inspections Department
PO BOX 617 - 910 Avenue C - Katy, Texas 77492 - 281.391.4830 - fax 281.391.4834 - www.cityofkaty.com
Email: permits.inspections@cityofkaty.com

FOR OFFICE USE ONLY

ROAD BORE: Yes _____ No _____ How Many Ft. _____ Initial _____
TAPS EXISTING ON LOCATION: Yes _____ No _____ Initial _____

APPLICATION FOR WATER TAPS/CONNECTIONS

The undersigned hereby applies for water tap/connections to the following described property in accordance with the water and plumbing codes and ordinances of the City of Katy, Texas. All provisions of the Code or other governing ordinances shall apply whether or not herein specified.

APPLICANT'S NAME _____
BILLING NAME _____
BILLING ADDRESS _____
EMAIL: _____ TELEPHONE _____
PROJECT ADDRESS _____
LOT _____ BLOCK _____ SUBDIVISION _____

WATER TAP SIZE _____ TAP FEE: \$ _____
ROAD BORE/CUT (If Applicable): FOOTAGE _____ x RATE _____ = \$ _____
NOTE: (REACTIVATION FEE OF \$75.00 IF DORMANT FOR 1 YEAR) \$ _____
TOTAL APPLICATION FEE \$ _____

RESIDENTIAL TAP FEES

CHECK ALL THAT APPLY:

DOMESTIC USE _____ IRRIGATION _____

Charges for connection to the existing city water system inside the city limits shall be paid by the property owner in advance in accordance with the following schedule:

- 5/8" x 3/4" Meter (20 Gallons Per Minute) \$ 250.00
 - 3/4" x 3/4" Meter (30 Gallons Per Minute) \$ 250.00
 - 1" Meter (50 Gallons Per Minute) \$ 750.00
 - 1 1/2" Meter (100 Gallons Per Minute) \$ 1,000.00
 - 2" Turbo Meter (180 Gallons Per Minute) \$ 1,500.00
- Turbo Meter for high flow, i.e.: Irrigation

BASE CHARGE FOR RESIDENTIAL DOMESTIC & IRRIGATION METERS: There is a base charge for domestic and irrigation meters, even when there is no usage. The base charge for a residential meter 5/8" x 3/4" or 3/4" x 3/4" is \$7.60 for 0-3,000 gallons of water. The base charge for a 1" residential meter is \$25.35 for 0-14,000 gallons of water. Rate schedules for residential usage over the minimum amounts are available at city hall.

RESIDENTIAL CONTINUED:

ROAD BORE/ROAD CUT: (IF APPLICABLE)

If a road bore/road cut is required to get a meter to the project address listed above, additional charges would apply as follows:

- 3/4" or 1" road bore.....\$ 7.50 per foot
 - 1 1/2" or 2" road bore.....\$12.50 per foot
 - Road cut cost based on man hours & equipment.....To be determined
- (Approved by city council on January 25, 1996)

WATER EXTENSIONS:

Charges for extension of the city water system to serve a customer inside the city limits shall be paid in advance by the property owner based on the actual total cost of the extension as established by the City's bidding process and the Texas Local Government Code, Sub-chapter B, Section 252.021

COMMERCIAL WATER TAP FEES

CHECK ALL THAT APPLY:

DOMESTIC _____ **IRRIGATION** _____ **FIRE LINE** _____

Contractor is responsible for making commercial taps and setting meters. An Insured licensed master plumber must make the taps.

\$250.00 FEE PER TAP-CITY INSPECTION ONLY

NOTE: The permits & Inspections Department must be called at 281-391-4830 for inspection on each installation. Failure to comply will delay issuance of the Certificate of Occupancy.

BASE CHARGE FOR COMMERCIAL DOMESTIC & IRRIGATION METERS: There is a base charge for domestic and irrigation meter, even when there is no usage. The base rate for a 3/4 inch meter is \$9.75 for 0-3,000 gallons of water, for a 1" meter it is \$32.50 for 0-15,000 gallons of water, for a 1 1/2" meter it is \$65.00 for 0-32,000 gallons of water, for a 2" meter it is \$130.00 for 0-66,000 of water, for a 3" meter it is \$292.50 for 0-152,000 gallons of water, for a 4" meter it is \$487.50 for 0-255,000 gallons of water and for a 6" meter it is \$1,137.50 for 0-599,000 gallons of water. Rate schedules for commercial usage over the minimum amounts are available at city hall.

I HEREBY ACCEPT ALL CONDITIONS MENTIONED ABOVE, AND CERTIFY THAT ALL STATEMENTS HEREIN RECORDED BY ME ARE TRUE. APPLICANT ACKNOWLEDGES THAT SIGNATURES TRANSMITTED ELECTRONICALLY OR BE FACSIMILE TRANSMISSION HAVE THE SAME LEGAL EFFECT AS ORIGINALS.

APPLICANT'S SIGNATURE

DATE SIGNED

OFFICE USE ONLY	
Signature of Approval	Date
Work Order No.	Date

RADIO READ METER INFORMATION

**SUPPLIER: Aqua Metric Sales Co.
4050 Flat Rock Dr.
Riverside, CA 92505
(951) 637-1400**

WATER METER

5/8" X 3/4" INVENSYS SR WATER METER W/TR/PL REGISTER 1000X
3/4" INVENSYS SR WATER METER W/TR/PL REGISTER 1000X
1" INVENSYS SR WATER METER W/TR/PL REGISTER 1000X
1 1/2" INVENSYS SR WATER METER W/TR/PL REGISTER 1000X
2" INVENSYS SR WATER METER W/TR/PL REGISTER 1000X

HARDWARE

1-METER TRANSCIVER UNIT (MXU) DUAL PORT #520R
(ORDER ONE OF THE ABOVE FOR EACH METER)
MULTI-READ 2-CHANNEL SPLITTER
MULTI-READ ENCLOSURE (SPLITTER ENCLOSURE)

LARGER METERS

W160 2" ECR/WP 1000G TURBO METER
W350 3" ECR/WP 1000G TURBO METER
W1000 4" ECR/WP 1000G METER
W2000 6" ECR/WP USG 1000G
SRH 2" COMPOUND ECR/WP 1000G
SRH 3" ECR/WP 1000G FLG CMPD
SRH 4" ECR/WP 1000G FLG CMPD
SRH 6" ECR/WP 1000G FLG CMPD
2" BRONZE METER STRAINER
3" FLG BRONZE STRAINER
4" BRONZE STRAINER
6" SENSUS BRONZE STRAINER

****NOTE****

WHEN ORDERING ANY OF THESE METERS, SPECIFY 1000 GALLON REGISTERS FOR KATY AND INCLUDE A MXU 520R WHICH IS REQUIRED FOR EACH METER.

CITY OF KATY

910 Avenue C, P.O. Box 617 Katy, TX 77492
281-391-4830: FAX 281-391-4834

REQUIREMENTS FOR WATER & SEWER TAPS

WATER TAPS

1. Mueller tap sleeve
2. Mueller valves
3. MJ (mechanical joint) fittings
4. Sensus Meter

If 2" or larger, meter type must be as follows:

- A. **Turbine (TXK):** For small irrigation systems & houses
 - B. **Turbine (SR):** For large irrigation systems or where large amounts of water are required
 - C. **Compound:** For all commercial buildings, restaurants, schools office buildings, etc.
5. Vault required for 3" or larger water meter

SEWER TAPS

1. Commercial sewer taps must be 6" or larger
2. If lateral line is two-thirds the size of the main, use a "T" with push-on fittings
3. If tap is less than two-thirds the size of the main, use a 90 degree tapping saddle.

NOTE:

COMMERCIAL CONTRACTORS MUST PAY A \$250.00 INSPECTION FEE FOR EACH TAP AT THE TIME OF APPLICATION. THE PERMITS AND INSPECTIONS DEPARTMENT MUST BE CALLED AT 281-391-4830 FOR INSPECTION OF EACH INSTALLATION. FAILURE TO DO SO WILL DELAY ISSUANCE OF THE CERTIFICATE OF OCCUPANCY.

ALL COMMERCIAL TAPS MUST BE PERFORMED BY A LICENSED AND INSURED MASTER PLUMBER.

SUPPLIES FOR INSTALLING 3/4" TO 1" TAPS

- 1 – Mueller or Smith Blair tapping saddle with CC threads (AWWA approved)
 - 1 – Brass corporation stop (Mueller) #H-15000 or #H-15008
 - 1 – Brass curb stop (Mueller) Flare to FIP #B25168 or Compression to FIP #B25170
 - 2 – Brass nipples (Mueller) #H-10896
- Copper (any brand) must be soft K copper

PROCEDURE FOR INSTALLING 2" TAPS FOR CITY OF KATY

- Install saddle onto water main with stainless steel band or bands that must be level
- Install 6" brass nipple into saddle
- Install 2" Mueller gate valve #A2360 with square wrench nut in other end of 6" brass nipple (make sure you put blocks under 2" gate valve if needed)
- You must flush line, fully opening valve for full flow before you install meter
- Use CI circular, adjustable valve box with PVC riser 4" or 6" on 2" Mueller gate valve
- All fittings need to be Mueller 110 conductive compression connection for CTS O.D. Tubing

SUPPLIES FOR 2" TAPS

- 1 – Type K soft copper
- 1 – 6" brass nipple
- 1 – 2" Mueller gate valve (FIP x FIP) right hand turn to close
- 1 – 2" Mueller ball valve curb stop #B-24335 Compression
- 1 – 2" concrete meter box with meter reader lid
- 1 – 2" Mueller straight coupling (compression + MIP Thread) #H-15428
- 2" turbo Sensus water meter for irrigation system only

All restaurants, churches or large buildings with high and low usage will be required to install Compound Sensus water meters. The City of Katy must inspect the installation, and must be provided with the location and meter of all meters installed, including irrigation systems. Failure to do so will delay the issuance of a certificate of occupancy.

FEES DOUBLE IF
WORK IS
PERFORMED
WITHOUT PERMIT
BEING ISSUED



NON-
TRANSFERABLE
NO REFUNDS
EXPIRES IN 180
DAYS

FOR OFFICE USE ONLY

ROAD BORE: Yes ___ No ___ How Many Ft. ___ Initials ___
TAPS EXISTING ON LOCATION: Yes ___ No ___ Initials ___

Email: permits.inspections@cityofkaty.com

APPLICATION FOR SEWER TAPS/CONNECTIONS

The undersigned hereby applies for sewer tap/connections to the following described property in accordance with the sewer and plumbing codes and ordinances of the City of Katy, Texas. All provisions of the Code or other governing ordinances shall apply whether or not herein specified.

APPLICANT'S NAME _____

BILLING NAME _____

BILLING ADDRESS _____

EMAIL: _____ TELEPHONE _____

PROJECT ADDRESS _____

LOT _____ BLOCK _____ SUBDIVISION _____

SEWER TAP SIZE _____ TAP FEE: \$ _____

ROAD BORE (If Applicable): FOOTAGE _____ x RATE _____ = \$ _____

**NOTE: REACTIVATION FEE OF \$50.00 IF DORMANT
FOR 1 YEAR** \$ _____

TOTAL APPLICATION FEE \$ _____

CHECK ONE BELOW:
****COMMERCIAL** _____ **RESIDENTIAL** _____

DOMESTIC USE _____

SEWER SYSTEM CONNECTIONS:

RESIDENTIAL:

Charges for connection to the existing city sewer system inside the city limits shall be paid by the property owner in advance in accordance with the following schedule:

- **4" Service/Sewer Tap Size** **\$ 250.00**
- **6" Service/Sewer Tap Size** **\$ 750.00**

LARGER SIZES:

NOTE: Larger sizes actual cost (labor, materials and road bore, if applicable), plus 20%. (Ordinance No. 1012 August 27, 1992)

ROAD BORE: (If applicable)

If a road bore is required, additional charges would apply as follows:

- **4" Sewer; Road Bore..... \$ 15.00 per foot**
- **6" Sewer; Road Bore..... \$ 20.00 per foot**

(APPROVED BY CITY COUNCIL ON January 25, 1996)

SEWER EXTENSIONS:

Charges for extension of the city sewer system to serve a customer inside the city limits shall be paid in advance by the property owner based on the actual total cost of the extension as established by the City's bidding process and the Texas Local Government Code, Sub-chapter B, Section 252.021. (Ordinance No. 1037, Section I, June 10, 1993).

4" to 6" road bores are normally contracted. The City's boring machine is not accurate enough for a bore of this size if any distance is involved. The contract price will be passed on to the customer.

For the extension of sanitary sewer service to commercial users outside the city limits of Katy, refer to City Ordinance No. 1063.

**** COMMERCIAL TAPS:**

General Contractor is responsible for having commercial taps made. Taps must be made by an insured licensed plumber.

NOTE: Contractors must pay a \$250.00 tap/inspection fee for each tap at the time of application. The Permits & Inspections Department must be called at 281-391-4830 for inspection on each installation. Failure to comply will delay issuance of the Certificate of Occupancy.

I HEREBY ACCEPT ALL CONDITIONS MENTIONED ABOVE, AND CERTIFY THAT ALL STATEMENTS HEREIN RECORDED BY ME ARE TRUE. APPLICANT ACKNOWLEDGES THAT SIGNATURES TRANSMITTED ELECTRONICALLY OR BY FACSIMILE TRANSMISSION HAVE THE SAME LEGAL EFFECT AS ORIGINALS. (revised 1-8-15)

APPLICANT'S SIGNATURE	DATE SIGNED
OFFICE USE ONLY	
_____ Signature of Approval	_____ Date
_____ Work Order No.	_____ Date

FEE'S DOUBLE IF
WORK IS
PERFORMED
WITHOUT PERMIT
BEING ISSUED



NON -
TRANSFERABLE
NO REFUNDS
EXPIRES IN 180
DAYS

Permits and Inspections Department
Email: permits.inspections@cityofkaty.com

APPLICATION FOR CULVERT PERMIT

NEW INSTALL _____ REPLACEMENT _____

OCCUPANCY USE: RESIDENTIAL _____ COMMERCIAL _____

DATE OF APPLICATION: _____

PROJECT ADDRESS: _____

LOT: _____ BLOCK: _____ SUBDIVISION: _____ COUNTY: _____

LEGAL PROPERTY OWNER: _____

Owner's Address/City/State/Zip: _____

Owner's Phone #: _____

CONTRACTOR'S NAME: _____

Address/City/State/Zip: _____

Contractor's Phone #: _____ EMAIL: _____

DESCRIPTION OF PROJECT: _____

TILE SIZE: 18" _____ 24" _____ OTHER (Specify) _____

Two Inspections Required:

- 1) Site Inspection: Prior to the start of construction.
- 2) Final Inspection: Tile must be in place, but not covered.

REINSPECTION FEES: (if required)
Reinspection fee is \$15.00 for the first reinspection, and the fee increases in increments of \$15.00 for each subsequent reinspection. (Ordinance 2240 adopted 11/10/03)

I HEREBY ACCEPT ALL CONDITIONS SET ABOVE AND CERTIFY THAT ALL STATEMENTS MADE HEREIN ARE TRUE. APPLICANT ACKNOWLEDGES THAT SIGNATURES TRANSMITTED ELECTRONICALLY OR BY FACSIMILE TRANSMISSION HAVE THE SAME LEGAL EFFECT AS ORIGINALS.

APPLICANT ORIGINAL SIGNATURE	PRINTED NAME	DATE
------------------------------	--------------	------

Approved By: Inspector _____ Date: _____



Permits and Inspections Department

After acquiring your Culvert permit:

1. How to Begin

- A. Place surveyor stakes (4 feet high) at each end of where you are requesting the placement of the culvert.*
- B. The Public Works Director or his designee will inspect the requested location. If acceptable, a flow line grade stake will be placed and the size culvert will be established, along with any other condition that may need consideration.*
- C. You may come by the Public Works office, 910 Ave C, to obtain this written information.*

2. Call the Permit office 281.391.4830 for inspection before any asphalt or concrete is poured.

Note: Please call by 2pm for next day inspection.

3. Final cover may be of most types of aggregates. Final drive surface shall comply with off street paving requirements.

4. Minimum diameter—Twenty-four (24") inches; eighteen (18") inches for pipe serving one (1) inlet.

5. Minimum slope—Storm sewers: 0.1%. Culverts shorter than one hundred (100') feet: 0.1 foot.

6. Material—

- a. Class III reinforced concrete pipe.*
- b. High Density Polyethylene (HDPE) Corrugated Smooth Lined thermoplastic pipe may be used when approved by the city engineer.*
- c. Texas Highway Department standard box culverts and headwalls.*

7. Joints—

- a. Class III Reinforced Concrete pipe – Bell and spigot joints with "O" ring type gaskets.*
- b. High Density Polyethylene Pipe – Bell and spigot joints with "O" ring type gaskets.*
- c. Box Culverts – "Ram-Mek" type asphaltic sealer or approved equal with joints to meet Texas Department of Highways specification.*

8. Bedding—All storm sewer is to be bedded with one and one half (1 ½) sack per cubic yard of cement stabilized sand, compacted to twelve (12") inches thickness, minimum.

9. Backfill—All storm sewer piping shall be backfilled to a minimum of twelve (12") inches over the top of the pipe with one and one half (1 ½) sack per cubic yard cement stabilized sand, compacted by mechanical means. When using HDPE pipe, caution shall be taken to insure proper bedding and backfill to meet the manufacturer's recommendations to provide the structural support necessary.



City of Katy

P.O. Box 617 • 910 Avenue C • Katy, Texas 77492-0617
Phone: 281/391-4800
Fax: 281/391-4834



REQUEST FOR TEMPORARY UTILITIES

DATE: _____ PROJECT #: _____

PROJECT ADDRESS: _____

We, the general contractor and electrical contractor, request the use of the temporary utilities for construction and the testing of equipment. We understand that the issuance of a permit for temporary utilities in no way grants permission to occupy or use any building, or portion thereof, unless all inspections for the building have been approved and a Certificate of Occupancy has been issued. We further understand that the temporary utilities may be disconnected for any violation of the Building Code. The general contractor and owner assume the responsibility for any violation of any city ordinance by a sub-contractor.

The temporary electrical permit will be in force for three (3) months (90 days). If more time is required to complete the building, a new application and fee shall be submitted by the electrical contractor.

If the Certificate of Occupancy has not been issued within 90 days of the Temporary Cut-In, electrical service will be disconnected.

The undersigned hereby agrees to indemnify and hold forever harmless the City of Katy, its officers, and employees from any and all claims or causes of action alleged to have been caused directly or indirectly by the temporary use of utilities for which this application is made.

NOTE

A FINE OF UP TO \$200 PER DAY MAY BE ASSESSED IF A STRUCTURE IS OCCUPIED PRIOR TO THE ISSUANCE OF A CERTIFICATE OF OCCUPANCY BY THE CITY OF KATY.

GENERAL CONTRACTOR:

MASTER ELECTRICIAN:

Signature

Signature

Print Name

Print Name

CITY OF KATY'S

Floodplain Development Permit Application

Page 1 of 4

SECTION 1: General Provisions (APPLICANT to read and sign):

1. No work of any kind may start until a permit is issued.
2. The permit may be revoked if any false statements are made herein.
3. If revoked, all work must cease until permit is re-issued.
4. Development shall not be used or occupied until a Certificate of Occupancy is issued.
5. The permit will expire if no work is commenced within six months of issuance.
6. Applicant is hereby informed that other permits may be required to fulfill local, state and federal regulatory requirements.
7. Applicant hereby gives consent to the Local Administrator or his/her representative to make reasonable inspections required to verify compliance.
8. THE APPLICANT, CERTIFY THAT ALL STATEMENTS HEREIN AND IN ATTACHMENTS TO THIS APPLICATION ARE, TO THE BEST OF MY KNOWLEDGE, TRUE AND ACCURATE.

(APPLICANT'S SIGNATURE) _____ DATE _____

SECTION 2: Proposed Development (To be completed by APPLICANT):

NAME _____ ADDRESS _____ TELEPHONE _____

APPLICANT _____

BUILDER _____

ENGINEER _____

PROJECT LOCATION _____

To avoid delay in processing the application, please provide enough information to easily identify the project location. Provide the street address, lot number or legal description (attach) and, outside urban areas, the distance to the nearest intersecting road or well-known landmark. A sketch attached to this application showing the project location would be helpful.

03/06/08

Floodplain Development Permit Application
(CONTINUED)

DESCRIPTION OF WORK (Check all applicable boxes):

A. STRUCTURAL DEVELOPMENT

ACTIVITY

- New Structure
- Addition
- Alteration
- Relocation
- Demolition
- Replacement

STRUCTURE TYPE

- Residential (1-4 Family)
- Residential (More than 4 Family)
- Non-residential (Flood proofing? Yes)
- Combined Use (Residential & Commercial)
- Manufactured (Mobile) Home (In Manufactured Home Park? Yes)

ESTIMATED COST OF PROJECT

\$ _____

OTHER DEVELOPMENT ACTIVITIES

- Clearing Fill Mining Drilling Grading
- Excavation (Except for Structural Development Checked Above)
- Watercourse Alteration (Including Dredging and Channel Modifications)
- Drainage Improvements (Including Culvert Work)
- Road, Street or Bridge Construction
- Subdivision (New or Expansion)
- Individual Water or Sewer System
- Other (Please specify) _____

After completing SECTION 2, APPLICANT should submit form to the Local Administrator for review.

SECTION 3: Floodplain Determination (To be completed by THE ADMINISTRATOR):

The proposed development is located on FIRM Panel No. _____, Dated _____

The Proposed Development:

Is **NOT** located in a Special Flood Hazard Area (Notify the applicant that the application review is complete and NO FLOODPLAIN DEVELOPMENT PERMIT IS REQUIRED).

Is partially located in the SFHA, but building/development is not.

Is located in a Special Flood Hazard Area
FIRM zone designation is _____
"100-Year" flood elevation at the site is: _____ ft. NGVD (MSL)
Unavailable

Is located in the floodway.

FBFM Panel No. _____, Dated _____
(If different from the FIRM panel and date)

See Section 4 for additional instructions.

Floodplain Administrator _____ DATE _____

Floodplain Development Permit Application
(CONTINUED)

APPEALS:	Appealed to Board of Appeals? YES NO
	Hearing date: _____
	Appeals Board Decision - Approved? YES NO

Reasons/Conditions: _____

Section 6: AS-BUILT ELEVATIONS (To be submitted by APPLICANT before Certification of Compliance is issued):

The following information must be provided for structures that are part of this application. This section must be completed by a registered professional engineer or a licensed land surveyor (or attach a certification to this application). Complete 1 and 2 below.

1. Actual (As-Built) Elevation of the top of the lowest floor, including basement (in Coastal High Hazard Areas, bottom of lowest horizontal structural member of the lowest floor, excluding piling(s) and columns) is: _____ ft. NGVD (MSL).

2. Actual (As-Built) Elevation of flood proofing protection is _____ ft. NGVD (MSL).

SECTION 7: COMPLIANCE ACTION (To be completed by LOCAL ADMINISTRATOR):

The LOCAL ADMINISTRATOR will complete this section as applicable based on inspection of the project to ensure compliance with the community's local law for flood damage prevention.

INSPECTIONS	DATE: _____	BY _____	DEFICIENCIES?	YES	NO
	DATE: _____	BY _____	DEFICIENCIES?	YES	NO
	DATE: _____	BY _____	DEFICIENCIES?	YES	NO

SECTION 8: CERTIFICATE OF COMPLIANCE (To be completed by LOCAL ADMINISTRATOR):

Certificate of Compliance issued: DATE _____ BY _____

CONSTRUCTION CODES

Sec. 3.101 Adoption of International, Standard and National Codes

The following codes and appendixes thereto and subsequent amendments and additions are hereby adopted by reference as though they were copied here word for word:

International Building Code – 2012 edition

International Energy Conservation Code – 2012 Edition

International Existing Building Code – 2012 Edition

International Fire Code – 2012 Edition

International Fuel and Gas Code – 2012 Edition

International Mechanical Code – 2012 Edition

International Plumbing code – 2012 Edition

International Property Maintenance Code – 2012 Edition

International Residential Code – 2012 Edition

International Swimming Pool & Spa Code – 2012 Edition

NFPA 101 Life Safety Code – 2012 Edition

National Electrical Code – 2011 Edition

(Ordinance 2587, adopted 9/23/13)

CITY OF KATY

RESIDENTIAL SURVEY REQUIREMENTS

ALL FORM AND FINAL SURVEYS MUST INCLUDE THE FOLLOWING:

1. BOUNDARY SURVEY:

- A. LOT
- B. BLOCK
- C. SECTION
- D. SUBDIVISION
- E. COUNTY RECORDING INFORMATION
- F. OWNER INFORMATION

2. PROPERTY ADDRESS

3. PLAT:

- A. BUILDING SETBACK LINES FOR FRONT, SIDES AND REAR.
- B. FOOTPRINT OF STRUCTURE(S) WITH DIMENSIONS TO PROPERTY LINES SHOWN FOR ALL BUILDINGS LOCATED ON PROPERTY, I.E., HOUSE, DETACHED GARAGE, GAZEBO, STORAGE/GARDEN SHED, COVERED PATIO, POOL, ETC.
- C. LOCATION OF DRIVEWAYS, PATIOS AND SIDEWALKS
- D. LOCATION OF ALL EASEMENTS, I.E., DRAINAGE, UTILITY, AERIAL ETC.
- E. FLOOR ELEVATIONS (MAIN STRUCTURE & DETACHED GARAGE)
 - (1) FLOOR ELEVATION ON FORM SURVEY, AND FINISHED FLOOR ELEVATION ON FINAL SURVEY, MUST BE 12 INCHES ABOVE THE CENTERLINE OF THE FRONT STREET, OR 18 INCHES ABOVE TOP OF CURB, OR 12 INCHES ABOVE THE BASE FLOOD PLAIN ELEVATION, WHICHEVER IS HIGHER. FLOOR ELEVATIONS MUST BE NOTED ON FORM AND FINAL SURVEYS.
 - (2) TOP OF CURB OR CENTERLINE OF STREET ELEVATIONS MUST BE NOTED ON FORM AND FINAL SURVEYS.

4. ALL RECORDED EASEMENT REFERENCES

5. FOOTPRINT MUST BE DIMENSIONALLY CORRECT AND MUST SHOW MEASUREMENTS AS WELL AS FORM AND FINISHED FLOOR ELEVATIONS

6. NAME OF SURVEYING COMPANY, SURVEYOR'S SEAL & SIGNATURE

FIRM (FLOOD INSURANCE RATE MAP) INFORMATION:

7. FORM SURVEY AND FINAL SURVEY MUST REFERENCE THE DETERMINED FLOOD ZONE AND FIRM REFERENCE AS FOLLOWS:

- (1) IF PROPERTY IS LOCATED IN WALLER OR HARRIS COUNTY USE FIRM MAP NUMBER 48473C0375E, PANEL NUMBER 0375, AND MAP DATED 2/18/09 FOR FLOOD PLAIN DETERMINATION
- (2) IF PROPERTY IS LOCATED IN FORT BEND COUNTY USE FIRM MAP NUMBER 48157C0040L, PANEL NUMBER 0040, AND MAP DATED 4-2-14 FOR FLOOD PLAIN DETERMINATION
- (3) ZONE IS TO BE DETERMINED BY SURVEYOR

8. IF PROPERTY DOES NOT LIE WITHIN THE 100- YEAR FLOOD PLAIN, SURVEY MUST SO INDICATE.

ORDINANCE NO. 2461

AN ORDINANCE AMENDING ARTICLE 3.104 (A)(1) OF THE CITY OF KATY CODE OF ORDINANCES BY REQUIRING FLOOR ELEVATION ON ALL RESIDENTIAL CONSTRUCTION WHERE THERE IS A CONCRETE SLAB, OF 12 INCHES ABOVE THE CENTERLINE OF THE FRONT STREET, OR 18 INCHES ABOVE THE CURB OR 12 INCHES ABOVE THE BASE FLOODPLAIN ELEVATION, WHICHEVER IS HIGHER.

BE IT ORDAINED BY THE CITY OF KATY, TEXAS, THAT:

I.

Article 3.104 (a)(1) of the City of Katy Code of Ordinances is hereby amended to read as follows:

- (1) A survey by a surveyor licensed by the State of Texas is required on all residential construction when a concrete slab is involved and shall be based on actual forms and must include a finished floor elevation of 12 inches above the centerline of the front street, or 18 inches above the curb or 12 inches above the base floodplain elevation, whichever is higher. A form survey is not required where there is an existing survey with absolute reference points. This exception shall not apply to projects located within the 100 year floodplain.

II.

The amendment hereby made shall become effective immediately on adoption of this Ordinance.


PASSED AND APPROVED on this 11th day of January, 2010.

CITY OF KATY, TEXAS


By:


Don Elder Jr., Mayor

ATTEST:


Melissa A. Bunch, City Secretary

APPROVED:

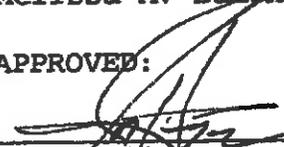
Joe Hegar, City Attorney

Amending Commercial Slab Elevation

Ordinance No. 2462 - Page 1 of 1

BUILDING INSPECTIONS REQUIRED FOR THE CITY OF KATY

ALL INSPECTIONS MAY NOT BE INCLUDED

- 1. ADDRESS VERIFICATION INSPECTION – THE PHYSICAL ADDRESS HAS TO BE POSTED AND INSPECTED PRIOR TO RELEASE OF BUILDING PERMIT. LETTERS MUST BE MINIMUM 4" TALL. THE ADDRESS MUST BE VISIBLE FROM THE STREET, AND IT SHALL REMAIN POSTED FOR THE DURATION OF THE CONSTRUCTION PROJECT. AT ANYTIME THE ADDRESS IS REMOVED, INSPECTIONS WILL BE PUT ON HOLD UNTIL ADDRESS IS MADE VISIBLE.**
- 2. PIER HOLE INSPECTIONS – CAGES MUST BE SET AND SUSPENDED OFF OF THE BOTTOM AND OFF OF THE SIDES**
- 3. FOUNDATION INSPECTION – BEFORE A FOUNDATION CAN BE SCHEDULED, THE PLUMBING IN-GROUND HAS TO BE APPROVED, AND THE FORM SURVEY AND ELEVATION CERTIFICATE MUST BE SUBMITTED AND APPROVED.**
- 4. COVER INSPECTION FOR PORCHES & POSTS BEFORE COVERING**
- 5. BRICK TIE/LATHE INSPECTION – THIS INSPECTION CAN BE CALLED IN BEFORE OR AFTER FRAME INSPECTION. ALSO, IF STRUCTURE IS TWO STORY, THE BRICK TIE OR LATHE INSPECTION CAN BE REQUESTED SEPARATELY FOR EACH STORY. EACH STORY HAS TO BE COMPLETED AT TIME OF INSPECTION REQUEST.**
- 6. ANCHOR BOLTS – CAN BE CALLED IN BEFORE OR AT TIME OF FRAME INSPECTION**
- 7. FRAME INSPECTION – BEFORE FRAME INSPECTION IS REQUESTED, THE FOLLOWING INSPECTIONS HAVE TO BE APPROVED: PLUMBING TOP OUT, MECHANICAL ROUGH-IN, AND ELECTRICAL ROUGH-IN. FRAMING INSPECTION WILL NOT BE CONDUCTED IF INSULATION IS INSTALLED PRIOR TO FRAME INSPECTION AND APPROVAL. IT WILL BE REQUIRED FOR INSULATION TO BE REMOVED IF INSTALLED PRIOR TO FRAME APPROVAL.**
- 8. STRUCTURAL STEEL FRAMING – ALL STRUCTURAL STEEL FRAMING WILL REQUIRE A 3RD PARTY ENGINEER OR CERTIFIED STRUCTURAL STEEL INSPECTOR TO INSPECT FRAMING.**
- 9. SHEETROCK SCREWS – FOR ALL MULTI-LAYERED FIRE RATED WALL ASSEMBLIES**
- 10. FLATWORK INSPECTIONS – ALL DRIVEWAYS, APPROACHES, WALKWAYS, SIDEWALKS AND PATIOS, OR ANY CONCRETE WORK MUST BE INSPECTED AND APPROVED BEFORE CONCRETE IS POURED**
- 11. FIRE SPRINKLER SYSTEM-REQUIRES AN INSPECTION FOR CEILING COVER AND A FINAL INSPECTION**
- 12. FIRE ALARM -**
- 13. BUILDING FINAL – BEFORE A BUILDING FINAL CAN BE SCHEDULED, ALL SUB-CONTRACTORS MUST REQUEST THEIR FINAL INSPECTION, ELECTRICAL SERVICE INSTALLED, GAS METER INSTALLED AND THE FOLLOWING PAPER WORK HAS TO BE SUBMITTED AND APPROVED: POST TENSION REPORT FROM ENGINEER, FINAL ENERGY CODE INSPECTION FROM A CERTIFIED ENERGY CODE INSPECTOR, ORIGINAL FINAL SURVEY AND ELEVATION CERTIFICATE. FOR COMMERCIAL JOBS A FINAL AS-BUILT DISK-PDF AND A COPY OF THE SALES TAX CERTIFICATE MUST ALSO BE SUBMITTED. THE WATER BILL MUST BE CURRENT.**

ELECTRICAL INSPECTIONS REQUIRED:

- 1. TEMPORARY POLE INSPECTION**
- 2. ELECTRICAL UNDERGROUND IN SLAB – INSPECTION REQUEST ONLY NECESSARY WHEN ELECTRICAL IS BEING PLACED IN FOUNDATION**
- 3. ELECTRICAL ROUGH-IN / COMMERCIAL – WALL AND CEILING COVERS**
- 4. ELECTRICAL UNDERGROUND INSPECTION- PRIOR TO TCI OR CAN BE INSPECTED AT THE SAME TIME OF TCI – CONDUIT EXPOSED AND CAUTION TAPE, MINIMUM 12 INCHES ABOVE CONDUIT. RED CONCRETE REQUIRED IF OVER 480 VOLTS. INSPECTOR IS TO BE ON SITE WHEN RED CONCRETE IS TO BE POURED.**
- 5. TEMPORARY CUT IN (TCI) – RESIDENTIAL - BEFORE A TCI INSPECTION CAN BE REQUESTED; ALL RECEPTACLES, SWITCHES, AND FIXTURES HAVE TO BE INSTALLED. IF ALL FIXTURES ARE NOT INSTALLED, THE WIRES HAVE TO BE DEAD ENDED AND MADE SAFE, AND A BLANK PLATE INSTALLED OVER BOX COMMERCIAL- POWER ONLY IF DISCONNECT CAN BE LOCKED**
- 6. ELECTRICAL FINAL**

MECHANICAL INSPECTIONS REQUIRED:

- 1. MECHANICAL ROUGH IN / CEILING COVER**
- 2. MECHANICAL FINAL**

PLUMBING INSPECTIONS REQUIRED:

- 1. PLUMBING IN-GROUND (DWV REQUIRED TO HAVE 10 FOOT HEAD OF WATER) COPPER WATER LINES TO BE SLEEVED WITH POLY TUBING.**
- 2. WATER SERVICE LINE INSPECTION**
- 3. SEWER LINE INSPECTION**
- 4. PLUMBING TOP OUT INSPECTION – DWV TO BE FILLED WITH WATER AND GAS LINE TEST REQUIRED TO BE HOLDING 25 PSI, WATER LINES TO BE UNDER WORKING PRESSURE**
- 5. SHOWER PANS/LINERS**
- 6. GTO (GAS TURN ON) INSPECTION FOR INSTALLATION OF GAS METER – ALL APPLIANCES WITH VENTS MUST BE INSTALLED, SUCH AS WATER HEATERS & FURNACES. IF WATER HEATER IS IN GARAGE, VENT MUST BE INSTALLED AT TOP OUT**
- 7. PLUMBING FINAL INSPECTION – WATER METER BOX WILL ALSO BE INSPECTED; WATER METER BOX HAS TO BE AT GRADE LEVEL AND NOT DAMAGED OR BROKEN. VALVE IS REQUIRED AT WATER METER ON CUSTOMER SIDE OF WATER METER.**


IRRIGATION INSPECTION REQUIRED

- 1. IRRIGATION FINAL – CONNECTION TO CITY WATER SUPPLY WILL BE INSPECTED –PRESSURE VACUUM BREAKER MUST BE INSULATED AND SUPPORTED, MUST BE PVB-NOT ANTI-SIPHON OR CHECK VALVE –A VALVE IS REQUIRED WHERE IRRIGATION TEES INTO THE WATER SERVICE. PVB MUST BE CERTIFIED BY A LICENSED TESTER AND THE ORIGINAL CERTIFICATION TEST REPORT PROVIDED TO THE CITY FOR FINAL INSPECTION**

ADDITIONAL INSPECTIONS MAY APPLY DEPENDING ON THE JOB. PLEASE CONTACT THE CITY IF YOU HAVE ANY QUESTIONS



City of Katy

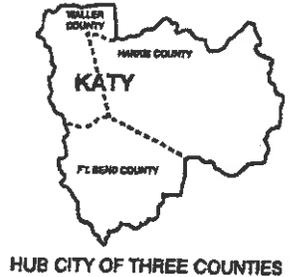

TO: BUILDING CONTRACTORS

RE: SCHEDULING OF FINAL INSPECTIONS

In order to facilitate the scheduling of finals on new construction, the City of Katy will require 48 hours' notice effective immediately.

The general contractor and all subcontractors must call the Permits Department to schedule their finals **48 hours** prior to the requested date and time. In addition, **48 hours** prior to the scheduled finals, all required paperwork must be in the Permits Department and approved by the Building Inspector. No faxed copies will be accepted. The required paperwork includes:

1. Final Survey (original blue-line required)
2. Post Tension Foundation Cable Report (if applicable)
3. Elevation Certificate (if applicable)
4. Final Energy Code Report
5. Sales Tax Certificate listing the address of business in the City of Katy
6. Final "As built" CD for Commercial projects

Also note that any outstanding reinspection fees or water bills for the property must be paid prior to the final inspections being scheduled.

Failure to comply with the above will delay the timely scheduling of finals and issuance of the Certificate of Occupancy.

Thank you for your cooperation.

Johnny Nelson
City Administrator

Posting Date: August 10, 1998
Revised: June 25, 2013

following:

(Ordinance 2240 adopted 11/10/03)

(i) Permit fees for new single family dwellings shall be as provided for in the fee schedule found in the appendix of this code:

(ii) Permit fee for structures under 120 square feet with a concrete foundation as provided for in the fee schedule found in the appendix of this code. Permit fee for structures under 120 square without concrete foundation as provided for in the fee schedule found in the appendix of this code.

(iii) Permit fee for open air patio covers with screens and no solid walls as provided for in the fee schedule found in the appendix of this code.

(iv) Permit fee for front porches up to 4' x 6' on mobile homes, open air with no solid walls as provided for in the fee schedule found in the appendix of this code. The 6' dimension shall be parallel to the mobile home and the roof shall be the same height as the home roof above the entrance door, front or rear, with a minimum of ten feet separating the two structures.

(v) Permit fee for room additions and garages of 500 square feet or less is as provided for in the fee schedule found in the appendix of this code. Room additions and garages 500.1 sq. ft. and larger shall be permitted in accordance with the fees in (i) above.

(vi) Reinspection fee is as provided for in the fee schedule found in the appendix of this code. Second reinspection fee for same item not previously corrected is as provided for in the fee schedule found in the appendix of this code.

(vii) Permit fee for re-roof of any residential structure is as provided for in the fee schedule found in the appendix of this code.

(viii) Permit fees for any build out with no additional square footage is as provided for in the fee schedule found in the appendix of this code.

(ix) In addition to the fees set out above applicant shall pay an administrative fee as provided for in the fee schedule found in the appendix of this code.

Sec. 3.103 Appeals

Any person aggrieved by the decision of the chief inspector or affected by a decision of the chief inspector may appeal the decision to the building and standards commission by filing a written complaint stating the basis for the appeal and the reasons said person believes the chief inspector's decision to be wrong. Such appeal must be filed within 14 days after the decision of the chief inspector is rendered. Upon filing the appeal, the appealing party shall file a copy with the permits department of the City of Katy and the chief inspector shall reply in writing to the appeal. The city secretary shall notify the chairman of the building and standards commission

ORDINANCE NO. 2587

AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF KATY, TEXAS, AMENDING SECTION 3.101 OF THE CITY OF KATY CODE OF ORDINANCES ADOPTING THE 2012 INTERNATIONAL BUILDING, EXISTING BUILDINGS, ENERGY CONSERVATION, FIRE, FUEL AND GAS, MECHANICAL, PLUMBING, PROPERTY MAINTENANCE, RESIDENTIAL SWIMMING POOL & SPA CODES; ADOPTING THE 2012 NFPA 101 LIFE SAFETY CODE; ADOPTING THE 2011 NATIONAL ELECTRIC CODE; AMENDING ARTICLE 5.100 FIRE PREVENTION CODE; AMENDING SECTION 11.1516 PLUMBING CODE; AMENDING ARTICLE 3.1100 INTERNATIONAL ENERGY CONSERVATION CODE ADOPTED; AMENDING ARTICLE 3.300 BUILDING STANDARDS COMMISSION; AMENDING ARTICLE 3.400 ELECTRICAL CODE; AMENDING SECTION 3.104 LOCAL AMENDMENTS TO THE ADOPTED CODES; REPEALING ALL ORDINANCES AND PARTS OF ORDINANCES IN CONFLICT HERewith; PROVIDING FOR AN EFFECTIVE DATE; PROVIDING FOR SEVERABILITY AND PROVIDING FOR A PENALTY.

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF KATY, TEXAS:

I.

That Chapter 3 "Building & Construction" of the Code of Ordinances of the City of Katy is hereby amended as follows:

DELETIONS

ADDITIONS

CHAPTER 3 BUILDING & CONSTRUCTION

ARTICLE 3.100 CONSTRUCTION CODES

Sec. 3.101 Adoption of International, Standard and National Codes

The following codes and appendixes thereto and subsequent amendments and additions, are hereby adopted by reference as though they were copied herein word for word except for the local amendments provide for in section 3.104 below:

- A. International Building Code - 2012 Edition
- B. International Energy Conservation Code - 2012 Edition
- C. International Existing Buildings Code - 2012 Edition
- D. International Fire Code - 2012 Edition
- E. International Fuel and Gas Code - 2012 Edition
- F. International Mechanical Code - 2012 Edition
- G. International Plumbing Code - 2012 Edition
- H. International Property Maintenance Code - 2012 Edition
- I. International Residential Code - 2012 Edition
- J. International Swimming Pool & Spa Code - 2012 Edition
- K. NFPA 101 Life Safety Code - 2012 Edition
- L. National Electrical Code - 2011 Edition

~~Sec. 3.101 Adoption of International, Standard and National Codes~~

~~The following codes and appendixes thereto and subsequent amendments and additions, are hereby adopted by reference as though they were copied herein word for word.~~

- ~~Standard Amusement Device Code - 1997 Edition~~
- ~~International Building Code - 2003 Edition~~
- ~~International Existing Buildings Code - 2003 Edition~~
- ~~International Fire Code - 2003 Edition~~
- ~~International Fuel and Gas Code - 2003 Edition~~
- ~~International Property Maintenance Code - 2003 Edition~~
- ~~International Plumbing Code - 2003 Edition~~
- ~~International Residential Code - 2003 Edition~~
- ~~International Mechanical Code - 2003 Edition~~
- ~~National Electrical Code - 2002 Edition~~
- ~~International Energy Code - 2003 Edition~~

ARTICLE 3.1100 INTERNATIONAL ENERGY CONSERVATION CODE ADOPTED

The International Energy Conservation Code 2012~~03~~ Edition, as published by the International Code Council (code) is hereby adopted for the regulation of, design, construction, quality of materials, erection, installation, alteration, repair, location, relocation, replacement, addition to, use or maintenance of the building envelope, mechanical, lighting and powers systems in the City of Katy. No local amendment shall impose any regulation less stringent than published in the code.

ARTICLE 3.300 CONSTRUCTION CODES

Sec. 3.302 Duties

The building and standards commission shall have the duties and purposes as set out in Chapter 54, Subchapter C of the Local Government Code in addition to serving as the board of adjustment and appeals as set out in the International Codes ~~standard codes of the Southern Building Code Congress International, Inc.~~ and amendments thereto, as adopted by the City of Katy Ordinance ~~751 and any other codes adopted or amended by any subsequent ordinance.~~

ARTICLE 3.400 ELECTRICAL CODE

Sec. 3.401 National Electrical Code Adopted

There is hereby adopted by the City of Katy for the purpose of establishing rules and regulations for the construction, alteration, removal and maintenance of electric wiring and apparatus, including permits and penalties, that certain electric code known as the National Electrical Code of the National Fire Protection Association, being particularly the 2011~~02~~ Edition of the National Electrical Code except such portions as are hereinafter deleted, modified or amended, of

which not less than one (1) copy has been and now is filed in the office of the city secretary of the City of Katy and the same is hereby adopted and incorporated as fully as if set out at length herein, and from the date on which this article shall take effect, the provisions thereof shall be controlling in the construction, alteration, maintenance or removal of all electric wiring and apparatus within the corporate limits of the City of Katy.

Sec. 3.402 Additions, Deletions, Modifications and Clarifications of National Electrical Code

~~(10) Aluminum wiring cannot be used for branch circuits. Copper Conductors Required. Only copper conductors shall be used for any residence, building, or structure in the City of Katy. Overhead open conductors may be aluminum conductors terminating at the weather head drip loop.~~

II.

That Chapter 5 "Fire Protection" of the Code of Ordinances of the City of Katy is hereby amended as follows:

DELETIONS ADDITIONS

CHAPTER 5 FIRE PROTECTION

ARTICLE 5.100 FIRE PREVENTION CODE

Sec. 5.101 Adoption

There is hereby adopted by the City of Katy, Texas, for the purpose of prescribing regulations governing conditions hazardous to life and property from fire or explosion, that certain code known as the International Fire Code, being particularly the 2001~~22~~ edition thereof, and the whole thereof, save and except such portions as are hereinafter deleted, modified or amended, of which code not less than one (1) copy

has been and now is filed in the office of the city secretary of the City of Katy, and the same is hereby adopted and incorporated as fully as if set out at length herein, and from the date on which this article shall take effect, the provisions thereof shall be controlling within the limits of the City of Katy, Texas.

~~Sec. 5.103 Appeals~~

~~The city council of the City of Katy, with the mayor serving as chairman, shall serve as the board of adjustments and appeals as set out in the International Fire Code Section 105 of the Standard Fire Prevention Code.~~

III.

That Chapter 11 "Utilities and Solid Waste" of the Code of Ordinances of the City of Katy is hereby amended as follows:

DELETIONS

ADDITIONS

CHAPTER 11 UTILITIES AND SOLID WASTE

ARTICLE 11.1500 WATER CONSERVATION PLAN

Sec. 11.1516 Plumbing Codes

(a) The city operates under the 201203 International Plumbing Code. This code has been formally adopted by the city council and is included in the City of Katy Code of Ordinances. A copy of this code is on file with the city secretary. The city routinely inspects new construction, remodeling, add-ons, etc., through building permits. All new construction is required to meet state and federal rules regarding water-conserving plumbing fixtures.

(b) The city does not offer a program for the replacement or retrofit of water conserving plumbing fixtures in existing structures other than what would be required through the permitting process for re-models and building upgrades.

IV.

Sec. 3.104 Local Amendments

(a) The International Building Code or International Residential Code is amended to provide the following:

- (1) A survey by a surveyor licensed by the state is required on all residential construction when a concrete slab is involved and shall be based on actual forms and must include a finished floor elevation of 12 inches above the centerline of the front street, or 18 inches above the curb or 12 inches above the base floodplain elevation, whichever is higher. A form survey is not required where there is an existing survey with absolute reference points. This exception shall not apply to projects located within the 100-year floodplain. (Ordinance 2461 adopted 1/11/10)
- (2) Surveys required hereunder shall show all municipal and private easements.
- (3) A final "as built" survey shall be submitted prior to receipt of certificate of occupancy and shall show the owner's name. The permit department shall submit notice of the certificate of occupancy to the water department and no service shall be extended to the construction without such notice.
- (4) Smoke and/or heat detectors shall be required in all attics in addition to all other required locations. Each unit shall operate on 110 volt electric service, have

battery backup and be interconnected in such a way that should any detector sound an alarm, all detectors will sound an alarm.

(5) Any and all mobile homes located within the City of Katy or its extra territorial jurisdiction shall within 6 months after adoption of this article comply with HUD requirements for anchoring and be skirted with a nonflammable material.

(6) In any garage attached to a residence, all walls and ceilings adjacent to the residence shall be covered with 5/8" sheetrock.

(7) Section 105.2 Notes 1.6 of the International Building Code are not adopted.

(b) The International Plumbing Code is amended to provide the following:

(1) Natural draft appliances shall have 3 feet minimum vertical height or as much as would be required for clearance from combustibles and the vertical to horizontal requirements.

(2) Water piping under a slab on grade shall be sleeved with a continuous piece of tubing .025 inches thick, terminating a minimum of 6" above the finished floor, per loop.

(3) Drain, waste and vent piping under slab on grade or structure shall be schedule 40 material minimum. Coextruded PVC plastic piping is not allowed.

(4) Building sewers and fittings shall be schedule 40 material and a minimum of 4" in size. Coextruded PVC plastic piping is not allowed.

~~(5) Pressure and temperature relief water lines shall be copper or galvanized piping.~~

(6_5) Roof jacks shall comply with Compliance Report #94151. If lead jacks are used they shall be 4 lbs. minimum lead unless incompatible with roofing system being installed.

~~(7_6)~~ Yard sprinkler systems shall be piped with schedule 40 PVC for all pressure lines. All field lines, not under pressure, may be Class 160 PVC piping minimum.

(8_7) All drain, waste and vent passing through concrete shall be coated with a minimum of 1/8 in. of mastic sealer.

(9_8) PEX piping with a material designation code of 5X06 or greater is allowed for plumbing only.

Ordinance number 2620 Adopted 3-10-14

(10_9) No person shall install, nor shall any landowner or person in control of real property within the City of Katy, install a lawn sprinkler or irrigation piping system, as that term is defined or used in the International Plumbing Code, without first applying for and obtaining a permit for its installation. No person, landowner or person in control of real property shall install a faucet or hose bib attached to a lawn sprinkler system or irrigation piping system when such system is attached to a water meter

which allows water usage without charge for sanitary sewer service. It shall be unlawful for any person to install, use or maintain a lawn sprinkler or irrigation piping system for any purpose other than the irrigation of vegetation when such system is attached to a separate water meter which allows water usage free of sanitary sewer usage fees.

(c) The International Residential Code ~~for One and Two Family Dwellings~~ is amended to provide the following:

~~(1) Chapters 21 through 32 dealing with plumbing are deleted, and all plumbing requirements shall be in conformity with the International Plumbing Code, as herein adopted.~~

~~(2) In all buildings requiring stairs, the standard rise shall be 7 3/4" maximum.~~

~~(3) Stairways, Winders. Winders are permitted, provided that the width of the tread at a point not more than twelve 12 inches (305 mm) from the side where the treads are narrower is not less than ten 10 inches (254 mm) and the minimum width of any tread is not less than six 6 inches (152 mm). The continuous handrail required shall be located on the side where the tread is narrower; however, a newel post may be installed at a turn but may not extend above the handrail.~~

~~(4)~~ (1) Chapter 4, Section R 401.1-Application, shall be amended to provide:

(A) All concrete slabs up to 4" thick shall be reinforced with minimum 6x6x6 welded wire mesh or #3 rebar on 16" centers.

~~(B) Beams in single story dwellings shall have 2 #4 rebar top and bottem.~~

~~(C) Beams in two story dwellings shall have 2 #5 rebar in the top and 3 #5 rebar in the bottem.~~

~~(D) Beams in three story dwellings shall have 3 #5 rebar in top and bottem.~~

(BE) All deformed bars (rebar) shall conform to ASTM A-615, A-616, A-617. Bar mats shall conform to ASTM A184. Welded wire fabric shall conform to ASTM A-185 or A-497.

(CF) All flat work shall be reinforced with #6 wire mesh or #3 rebar on 18" centers.

(DG) All reinforcement shall be elevated as required in ACI 318 and ACI 302.

(EH) Wood shingles on new construction are prohibited except when the new construction is an addition to an existing wood shingle roof or is placed on a decorative structure such as a gazebo, by way of example only, which is located more than ten (10') feet from the main structure.

(2) Section R105.2 Notes 1, 5 & 10 of the International Residential Code are not adopted.

(d) Any plumber, electrician, air conditioning/heating and/or general contractor applying for any permit required under any building, construction, plumbing or electrical code adopted by the City of Katy, shall show proof of general liability insurance of at least \$300,000.00 or equal to the estimated value of the structure, whichever is greater, prior to receipt of any permit. This requirement shall not apply to a homeowner performing work on his own home.

(e) The International Fire Code 201203 Edition, Chapter 3, Section 308.3, is amended by adding the following language:

(1) The construction, erection, maintenance or use of a barbecue pit or the burning of any combustible material within 10 feet of any wall of a multifamily residential

building, or on or beneath any balcony, porch, roof overhang or a veranda of a multifamily residential building constitutes a fire hazard which endangers life and threatens property.

(A) No person shall construct, erect, install, maintain or use any barbecue pit or burn any combustible material within 10 feet of any wall of a multifamily residential building, or on or beneath a balcony, porch, roof overhang or a veranda of a multifamily residential building.

(B) It is unlawful for any person to construct, erect, install, maintain or use any barbecue pit or burn any combustible material within 10 feet of any wall of a multifamily residential building, or on or beneath a balcony, porch, roof overhang or a veranda of a multifamily residential building.

(C) Electric barbecue pits are excepted from this section provided they have no open flame and are equipped with, and there is present, a noncombustible metal lid, with a handle, fitting over the entire cooking surface.

(D) For purposes of this section:

(i) Barbecue Pit. Shall mean any kind of device used for cooking food by exposing such food directly to red heat or open flames from heated briquettes, charcoal, natural gas, propane, compressed gas, wood or paper.

(ii) Multifamily residential building. Shall mean a building containing more than one residential unit including apartment complexes, duplexes, fourplexes, condominiums or any other structure where more than one family may reside in a residential unit.

(iii) Burn. Shall mean to light a fire, which produces heat or light, resulting in the combustion of any material including wood, natural gas, liquid petroleum gas, charcoal, briquettes or paper.

(f) The International Existing Building Code is amended to provide the following:

(1) Section 105.2 Note 1 of the International Existing Building Code is not adopted.

V.

In the event any clause phrase, provision, sentence, or part of this Ordinance or the application of the same to any person or circumstances shall for any reason be adjudged invalid or held unconstitutional by a court of competent jurisdiction, it shall not affect, impair, or invalidate this Ordinance as a whole or any part or provision hereof other than the part declared to be invalid or unconstitutional; and the City Council of the City of Katy, Texas, declares that it would have passed each and every part of the same notwithstanding the omission of any such part thus declared to be invalid or unconstitutional, whether there be one or more parts.

VI.

All ordinances or parts of ordinances inconsistent or in conflict herewith are, to the extent of such inconsistency or conflict, hereby repealed.

VII.

This ordinance is effective at 12:01 a.m. January 1, 2014.

VIII.

Any person who shall intentionally, knowingly, recklessly, or with criminal negligence, violate any provision of this Ordinance shall be deemed guilty of a misdemeanor and, upon conviction, shall be fined in accordance with the applicable penalty provided for in Section 1.106 of the City of Katy Code of Ordinances. Each day of violation shall constitute a separate offense.

IX.

The City Secretary is authorized to publish a summary or the caption of this Ordinance as required by law.

PASSED AND APPROVED this the 23rd day of September, 2013.

CITY OF KATY, TEXAS



Fabol Hughes, Mayor

ATTEST:



Melissa A. Bunch, City Secretary

APPROVED:



Art Bertiles III, City Attorney

ORDINANCE NO. 2620

AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF KATY, TEXAS, AMENDING SECTION 3.104 TO AMEND THE INTERNATIONAL PLUMBING CODE AND THE INTERNATIONAL RESIDENTIAL CODE TO ALLOW PEX PIPING; REPEALING ALL ORDINANCES AND PARTS OF ORDINANCES IN CONFLICT HEREWITH; PROVIDING FOR AN EFFECTIVE DATE; PROVIDING FOR SEVERABILITY AND PROVIDING FOR A PENALTY.

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF KATY, TEXAS:

I.

That Chapter 3 "Building & Construction" of the Code of Ordinances of the City of Katy is hereby amended as follows:

DELETIONS ADDITIONS

CHAPTER 3 BUILDING & CONSTRUCTION

ARTICLE 3.100 CONSTRUCTION CODES

Sec. 3.104 Local Amendments

(b) The International Plumbing Code and International Residential Code are amended to provide the following:

- (8) PEX piping with a material designation code of 5X06 or greater is allowed for plumbing only. ~~PEX Type "A" piping is allowed for plumbing only.~~

II.

In the event any clause phrase, provision, sentence, or part of this Ordinance or the application of the same to any person or circumstances shall for any reason be adjudged invalid or held unconstitutional by a court of competent jurisdiction, it shall not affect, impair, or invalidate this Ordinance as a whole or any part or provision hereof other than the part declared to be invalid or unconstitutional; and the City Council of the City of Katy, Texas, declares that it would have passed each and every part of the same notwithstanding the omission of

any such part thus declared to be invalid or unconstitutional, whether there be one or more parts.

III.

All ordinances or parts of ordinances inconsistent or in conflict herewith are, to the extent of such inconsistency or conflict, hereby repealed.

IV.

This ordinance is upon approval by City Council.

V.


Any person who shall intentionally, knowingly, recklessly, or with criminal negligence, violate any provision of this Ordinance shall be deemed guilty of a misdemeanor and, upon conviction, shall be fined in accordance with the applicable penalty provided for in Section 1.106 of the City of Katy Code of Ordinances. Each day of violation shall constitute a separate offense.

VI.

The City Secretary is authorized to publish a summary or the caption of this Ordinance as required by law.

PASSED AND APPROVED this the 10th day of March, 2014.

CITY OF KATY, TEXAS



Fabol Hughes, Mayor

ATTEST:



Melissa A. Bunch, City Secretary

APPROVED:



Art Pertile III, City Attorney

(1) The construction, erection, maintenance or use of a barbecue pit or the burning of any combustible material within 10 feet of any wall of a multifamily residential building, or on or beneath any balcony, porch, roof overhang or a veranda of a multifamily residential building constitutes a fire hazard which endangers life and threatens property.

(A) No person shall construct, erect, install, maintain or use any barbecue pit or burn any combustible material within 10 feet of any wall of a multifamily residential building, or on or beneath a balcony, porch, roof overhang or a veranda of a multifamily residential building.

(B) It is unlawful for any person to construct, erect, install, maintain or use any barbecue pit or burn any combustible material within 10 feet of any wall of a multifamily residential building, or on or beneath a balcony, porch, roof overhang or a veranda of a multifamily residential building.

(C) Electric barbecue pits are excepted from this section provided they have no open flame and are equipped with, and there is present, a noncombustible metal lid, with a handle, fitting over the entire cooking surface.

(D) For purposes of this section:

(i) Barbecue Pit. Shall mean any kind of device used for cooking food by exposing such food directly to red heat or open flames from heated briquettes, charcoal, natural gas, propane, compressed gas, wood or paper.

(ii) Multifamily residential building. Shall mean a building containing more than one residential unit including apartment complexes, duplexes, fourplexes, condominiums or any other structure where more than one family may reside in a residential unit.

(iii) Burn. Shall mean to light a fire, which produces heat or light, resulting in the combustion of any material including wood, natural gas, liquid petroleum gas, charcoal, briquettes or paper.

(Ordinance 2096 adopted 12/13/99)

Sec. 3.105 Contractor's Registration Required

(a) Definitions.

Contractor. In the aggregate, refers to electrical contractor, fire alarm/sprinkler contractor, general contractor, HVAC contractor, irrigation contractor, plumbing contractor, roofing contractor, sign contractor, sub-contractor, and swimming pool contractor as those terms are defined in this section.

Electrical Contractor. Any person who installs, alters, or repairs any electrical appliance, wiring, fixtures or conduits used to supply electricity to or within any building, structure or other facility.

Fire Alarm/Sprinkler Contractor. Any person engaged in leasing, selling, maintaining, servicing, repairing, altering, replacing, or relocating fire alarm systems or causing such to be sold, leased, maintained, serviced, repaired, altered, or moved within any building, structure or other facility.

General Contractor. Any person engaged in the construction, alteration or repair of buildings or other structures, driveways, sidewalks, or street pavement.

HVAC Contractor. Any person engaged in a business related to heating, ventilation, or air conditioning (HVAC) including the installation of heat pumps, refrigeration equipment, air handlers or other equipment or devices used to remove heat from any building, structure or other facility or equipment used to heat any building, structure or other facility.

Irrigation Contractor. Any person who installs, repairs or maintains any system designed to spray, soak or sprinkle water on lawns, gardens, shrubbery or other landscape vegetation located on any property or surrounding any building, structure or other facility.

Plumbing Contractor. Any person who engages in the activity or business of constructing, installing, altering, or repairing any plumbing or sanitary sewer system in or connected to any building, structure or other facility.

Roofing Contractor. Any person who installs, repairs or replaces roofs or roofing material on any building, structure or other facility.

Sign Contractor. Any person who erects, constructs, maintains or repairs any structure designed to be used in connection with advertising, promoting or disseminating information generally referred to as a "sign" whether free-standing or attached to a building, structure or other facility and including any sign which incorporates any electrical or lighted components.

Sub-Contractor. Any person who is engaged to perform work under the direction of a contractor as that term is herein defined.

Swimming Pool Contractor. Any person who constructs or replaces or performs any structural repair on any in-ground or above-ground swimming pool whether made of concrete, gunite, metal, plastic or other material.

(b) **Registration Required.** Any person who engages in business as a contractor in the city shall register with the city prior to performing any work or obtaining a building or other construction or sign permit.

(c) **Unlawful to Work Without Registering.** It shall be unlawful for any person to engage in business in the city as a contractor who has not registered as a contractor.

(d) **Information Required for Registration.**

(1) Anyone wishing to register as a contractor shall complete an application in the public works department of the city.

(2) Anyone wishing to register shall provide the following information:

(A) Original of any license/registration required by the state (copy to be made by public works department at time of application).

(B) Full name of the contractor applicant.

(C) Physical and mailing address of applicant.

(D) Applicant's personal and business telephone numbers.

(E) Applicant's original driver's license for copying by city.

(F) Proof of motor vehicle and comprehensive liability insurance with \$300,000.00 minimum, listing city as certificate holder.

(e) Annual Fee; Expiration. The annual fee for contractor registration is \$100.00 per year or any part thereof. Each application for contractor registration and each renewal application shall be accompanied by a \$100.00 application fee. registration, initial or renewal, shall expire on December 31.

(f) Contractor Duty. It shall be the duty of each contractor doing business in the city to comply with all ordinances relating to building and construction in the city or any other ordinance pertaining to the activities of contractor.

(g) Comprehensive and Motor Vehicle Insurance. All contractors shall have in force at the time of registration:

(1) General comprehensive liability insurance in the minimum amount of \$300,000.00 showing the city as certificate holder; and

(2) Liability insurance for each motor vehicle used in the contractor's business.

(h) Revocation. Any contractor registration may be revoked by the public works director for failure to comply with the terms of this section or any other ordinance of the city relating to the contractor's business or for repeated violation of the ordinances of the city.

(i) Work for the City. Any contractor performing work for the city must, in addition to the other requirements herein, show proof that such contractor has Worker's Compensation Insurance.

(j) Penalty for Failure to Comply. In addition to any other penalty provision contained herein and in addition to a penalty for any other violation of the ordinances of the city any person who

violates this section shall, upon conviction, be guilty of a misdemeanor and may be fined in accordance with the general penalty provision found in section 1.106 of this code for each day such violation continues.

(Ordinance 2287 adopted 7/25/05)

ARTICLE 3.400 ELECTRICAL CODE

Sec. 3.401 National Electrical Code Adopted

There is hereby adopted by the City of Katy for the purpose of establishing rules and regulations for the construction, alteration, removal and maintenance of electric wiring and apparatus, including permits and penalties, that certain electric code known as the National Electrical Code of the National Fire Protection Association, being particularly the ~~2002~~ Edition of the National Electrical Code except such portions as are hereinafter deleted, modified or amended, of which not less than one (1) copy has been and now is filed in the office of the city secretary of the City of Katy and the same is hereby adopted and incorporated as fully as if set out at length herein, and from the date on which this article shall take effect, the provisions thereof shall be controlling in the construction, alteration, maintenance or removal of all electric wiring and apparatus within the corporate limits of the City of Katy. (1979 Code of Ordinances, Chapter 3, Section 4; Ordinance 2179 adopted 4/8/02; Ordinance 2240 adopted 11/10/03) → 2011

Sec. 3.402 Additions, Deletions, Modifications and Clarifications of National Electrical Code

When any of the following provisions of this article conflict with any provision contained in the National Electrical Code referenced above, the provisions of this article shall be controlling:

- (1) Conforming With Article. No electrical materials, apparatus, devices, appliances, fixtures, or equipment shall be sold or installed in the city unless they are in conformity with the provisions of this article, the statutes of the State of Texas and the rules and regulations issued by the Industrial Commission of the State of Texas under authority of the State Statutes. The maker's name, trademark, or other identification symbol shall be placed on all electrical materials, apparatus, devices, appliances, fixtures and equipment used or installed under this article.
- (2) Wiring or Wiring Systems Allowable. In general, any type of wiring or wiring system may be used in the City of Katy as approved in the National Codes adopted in this article, except where specifically prohibited herein.
- (3) Underground Services or Feeders. All underground services or feeders shall be installed in rigid metal conduit or schedule 40 non-metallic conduit. All underground services and feeders rated at 480 volts or more shall be encased in a minimum 2" of red impregnated concrete, rated at 2000 psi.
- (4) Placement of Meters. The electric public service company shall never require the placing of meters on the front or street side of a building, without the written consent

City of Katy Code of Ordinances

of the owner, and where not practical in the opinion of the chief electrical inspector to place metering devices on the exterior of the building, said location shall be at a point, or points, convenient to the electric public service company's service as determined by the chief electrical inspector.

- (5) When Separate Circuits Required. In all dwellings, there shall be a separate circuit for automatic washing machines, disposals, and dishwashers, in addition to the regular kitchen and dining room appliance circuit. Such circuits are to be 12 AWG conductors, copper, 20 ampere automatic protective elements.
- (6) Service Conduit Requirements. When a permit is issued for addition or alteration to electrical system of a residence, apartment, or rooming house wiring, service conduit for any occupancy shall be not less than one (1") inch in size. No fewer than three (3) independent conductors of number 4 AWG copper conductors or larger shall be used to effect a change of service and/or meter loop in any residence, apartment, apartment house, commercial building or other building of whatsoever character now existing or to be constructed within the City of Katy, Texas.
- (7) Electrical Appliances to be Serviced by Separate Circuits. All window air conditioning units, whole house fans, electric dryers, electric water heaters and similar electrical appliances and related devices installed within the City of Katy, Texas, shall be serviced by an independent branch circuit rated at a minimum of 30 amps or name plate rating, whichever is the largest. This provision shall not apply to existing structures with existing branch circuits, provided that the existing circuits meet the latest N.E.C. Standards.
- (8) Buildings and Structures. All buildings and structures, i.e. gazebos, covered picnic areas, restrooms, sports' fields, offices, storage facilities, libraries, that are within the city limits and are owned or operated by the city shall be prohibited from the use of NM Cable and AC cable.
- (9) Commercial Building and Installations. AC cable (BX) or NM Cable (Romex) are prohibited from use in or on any commercial buildings or installation.
- ~~(10) Copper Conductors Required. Only copper conductors shall be used for any residence, building, or structure in the City of Katy. Overhead open conductors may be aluminum conductors terminating at the weather head drip loop.~~
- (10) Aluminum wiring cannot be used for branch circuits.

Sec. 3.403 General Wiring Installation Standards

- (a) Wires to be Strong and Properly Supported. Every corporation, partnership, association, or

City of Katy Code of Ordinances

individual owning or operating a line of wires over streets, alleys, or buildings in this city shall use only wires that are suitable and strong; shall suitably and safely attach them to strong and sufficient supports and insulate them at all points of attachment and shall remove all wires when abandoned for use.

(b) Wires Not to Interfere with Fire Department. No wire or wires shall be installed, operated or maintained over any street, alley, sidewalk, or building in this city which shall be liable to seriously interfere with the work of the fire department in the use of ladders or other apparatus, or which shall obstruct or render hazardous the use of fire escapes, and on complaint of the fire chief, said obstruction interfering or hazardous wires shall be removed or properly rearranged.

(c) Signal Wires. Wherever possible and expedient, signal wires shall not be carried on the same pole with or in dangerous proximity to high potential electric light or power wires and where a joint occupancy pole line composed of these two (2) classes of system is necessary, or where the route traversed by these systems cross each other, the high potential electric light or power wires shall be placed and maintained not less than forty (40") inches above every signal wire, and where it is impossible to provide for such a separation, it shall be the duty of the electrical inspector to arrange and enforce an equitable and safe alternative plan.

Sec. 3.404 Electrical Inspector(s) Appointed; Qualifications

The position of chief electrical inspector and deputy electrical or inspectors in and for the City of Katy, is hereby created, and said positions or so many as he deems necessary shall be filled by appointment by the mayor and council. Any person so appointed may be removed at anytime, with cause, by the mayor and council. Said electrical inspectors shall be well versed in all the ordinances, rules and requirements of the City of Katy governing electrical matters

Sec. 3.405 Powers and Duties of Electrical Inspectors

(a) Enforcement of Article. It shall be the duty of the chief electrical inspector and the deputy electrical inspector to enforce the provisions of this article or any ordinance or regulations now in force or which may hereafter be adopted concerning electric wiring or apparatus.

(b) Right of Entry. The said chief electrical inspector and/or any deputy electrical inspector shall have the right during reasonable hours to enter any building, manhole, or subway in the discharge of his official duties and/or for the purpose of inspecting the electrical apparatus or appliances thereof contained, and for that purpose he shall be given prompt access to all buildings, private or public and to all manholes and subways on application to the company, firm, or individual owning or in charge or control of same.

(c) Notification to Violators. Where wires or apparatus are found in dangerous or unsafe

condition, or are deemed to be an interference with the work of the fire department, inspectors shall notify the person, firm or company owning, using, or operating them to place them in a safe, secure and noninterfering condition. Any corporation, co-partnership, association, or individual or agent thereof failing, neglecting, or refusing within a reasonable time to make the necessary repairs or changes, and have the necessary work completed within a reasonable time after the receipt of said notice, shall be deemed guilty of violation of this article.

(d) Rights Conferred Upon Deputy Inspectors. Each deputy electrical inspector shall in every case be known to be competent to discharge the duties of the chief electrical inspector, and the rights and privileges conferred upon the chief electrical inspector are hereby conferred upon each deputy electrical inspector when properly appointed.

(e) Authority to Remove Concealed Work in Violation of Article. The chief electrical inspector and/or any deputy electrical inspector is hereby authorized and directed to remove any flooring, lathing or plaster, sheet metal or any other material which may conceal any electrical wiring or apparatus contrary to the provisions of this article. On completion of the inspection of any electric wiring or apparatus designed to be concealed and found to be in full compliance with the provisions of this article, it shall be the duty of an electrical inspector to post a notice to that effect at the main disconnecting means, or other conspicuous place, and said notice shall be considered as an express permission to conceal said electric wiring and apparatus, but no concealment shall take place until such notice has been posted by an electrical inspector.

(f) Additional Powers. The fire marshal or an electrical inspector or a competent person delegated by them or either of them shall have the power to at once cause the removal of all wires, or the turning off of all electric current where the circuits interfere with the work of the fire department during the progress of a fire. An electrical inspector is hereby authorized and empowered to cause the turning off of electric current from all conductors or apparatus which are deemed by him/her to be in an unsafe condition, or which have not been installed in conformity with the provisions of this article.

(g) Chief Inspector to Decide Questions. The chief electrical inspector shall decide all questions not provided for in this article pertaining to the installation, operation, or maintenance of electric wiring and apparatus.

Sec. 3.406 Definitions

(a) Master Electrician is hereby defined to be any person skilled in the planning, supervision, installation, alteration or changing of electric wiring and apparatus, and familiar with the rules, laws and regulations governing the same, and who has been licensed in the manner provided by this article.

(b) Maintenance Electrician is hereby defined to be an electrician regularly employed on a permanent basis, by any reason, and who performs work only in the confines of the building or buildings in or on the premises where he/she is regularly employed on a permanent basis, who does electrical maintenance work, or shall be known as maintenance work, shall be known as maintenance electrician. (Maintenance shall mean the keeping in safe repair of any and all electrical installations, apparatus and equipment on the premises of the place of permanent employment but does not include the installation of new and additional electrical work, electrical equipment, or electrical apparatus.) Such electrician shall be a qualified master electrician.

(c) Journeyman Electrician, Maintenance or Apprentice Electrician is hereby defined to be any person, other than a master electrician, who is engaged in the practical installation, alteration or changing of electric wiring and apparatus and who has been granted a license in the manner provided by this article.

(d) Electric Wiring and Apparatus as used in this article shall be construed to include all materials, devices, machinery, appliances, appurtenances, or conductors used in connection with the production of electric lights, heat, or power, or the transmission of electrical signals.

(e) Temporary Cut-in (TCI). Temporary electrical service up to ninety days, at the expiration of the 90 day time period, service will become permanent unless electrical service is terminated by the chief electrical inspector or his/her designate in writing to Houston Lighting and Power.

(1979 Code of Ordinances, Chapter 3, Section 4)

Sec. 3.407 Licensing Requirements; Fees

(a) Any person desiring the issuance or renewal of a license as a master, journeyman, maintenance, or apprentice electrician as required by Section 3.408 of this article, shall apply for such license or renewal to the City of Katy, Department of Public Works. Application shall be made by completing the application provided by the City of Katy in addition to paying the fee as hereinafter set out. In addition, if the applicant is seeking a license or renewal of a master or journeyman license or any other designation for which SBCCI provides examinations, the applicant shall provide proof that the applicant has taken and passed such examination. A copy of the notification that the examination has been successfully completed issued by the testing

City of Katy Code of Ordinances

organization shall be proof and a copy thereof maintained in the files of the City of Katy. Applicants for renewal of any of the licenses required hereunder shall also provide notice of the successful completion of an 8 hour approved review course on the National Electric Code each licensing year that a new National Electrical Code is adopted. Such review completion shall be a prerequisite to the renewal of any license issued hereunder. All licenses shall expire on December 31 of each year.

(b) Annual testing and licensing fees shall be as provided for in the fee schedule found in the appendix of this code.

(Ordinance 2017 adopted 6/22/98)

Sec. 3.408 Appropriate Licenses Required

No corporation, partnership, association, or individual shall engage in installing, altering, or changing of any electric wiring and apparatus in the City of Katy, who does not have a valid, unexpired and subsisting master electrician's license from the City of Katy. No person shall engage in any installing, altering, or changing of any electric wiring and apparatus, in the City of Katy, who does not hold a valid, subsisting and unexpired master electrician's license from the City of Katy, or a valid, subsisting and unexpired journeyman electrician's maintenance or apprentice electrician's license from the City of Katy; and in the latter case such person shall only engage in electrical work in the City of Katy when employed by a master electrician and actually working under the immediate supervision and control of one holding a valid, subsisting, and unexpired journeyman electrician's license from the City of Katy. None of the provisions of this article shall apply to a homeowner who personally engages in doing electrical work in his/her homestead. (1979 Code of Ordinances, Chapter 3, Section 4; Ordinance 2240 adopted 11/10/03)

Sec. 3.409 When License Has Been Refused

Any person who has applied for a license as a master, journeyman, maintenance, or apprentice electrician, which application shall be refused by the chief electrical inspector, or whose license has been suspended or revoked, may, within ten (10) days thereafter, apply to the building and standards commission for a full hearing before the building and standards commission which shall determine the applicant's qualifications or suspension or revocation, and shall make a final ruling in connection with the granting or refusal of such license.

(1) Suspension or Revocation of Licenses. Any licensee may, after hearing by the building and standards commission, be revoked or suspended by the building and standards commission upon any of the following grounds:

(A) Under the influence of alcohol and/or the use of a controlled substance.

City of Katy Code of Ordinances

- (B) Conviction of a crime involving moral turpitude.**
- (C) Adjudication of insanity.**
- (D) Untrue statements made in obtaining license.**

City of Katy Code of Ordinances

- (E) Violating or permitting any violation of this article or any other electrical regulations or rules of the City of Katy.
- (F) Defrauding any person for whom he has rendered or contracted to render service.
- (G) Securing a permit for installation not performed or to be performed by permittee.
- (H) Securing permit under any pretext for an installation concerning which applicant has no valid contract.
- (I) Failing to use good materials.
- (J) Failure to do work in a good and workmanlike manner.
- (K) Untrue statements or fraud in procuring a permit.

Sec. 3.410 When Electrical Permits are Required

No alteration or change shall be made in the electric wiring or apparatus; nor shall any such electric wiring or apparatus be installed in any building without first securing, from an electrical inspector, a permit; nor shall any change be made in any wiring or apparatus after inspection without notifying an electrical inspector and securing a new permit.

Sec. 3.411 Applications for and Issuance of Permits

Before issuing a permit for the installation of any electric wiring or apparatus, or for the alteration of or change in any electric wiring or apparatus, as provided in the preceding section, an application shall be filed with the chief electrical inspector, describing such installation, alteration or change to be made, including the apparatus and material to be used. No permit shall be issued until such application shall have been paid to the permit clerk of the City of Katy. Permits shall be issued only when the application bears the true signature of the master electrician except when applicant is physically incapacitated or expects to be absent from the county and the application so states under oath, special permission may be granted by the building and standards commission. No deviation shall be made in the details for wiring of apparatus as shown on any application unless a new application is filed and a new permit granted, for which a permit fee shall be charged and collected as though it were a new permit.

Sec. 3.412 Inspector(s) to Issue Certificate of Satisfactory Inspection

Upon completion of the installation or of any alteration or change of electric wires and apparatus

City of Katy Code of Ordinances

in any building, it shall be the duty of the corporation, copartnership, association or individual doing the same to notify an electrical inspector who shall inspect the same within a reasonable time, and if in accordance with the ordinances, rules and regulations of the City of Katy, shall issue a certificate of satisfactory inspection which shall contain the date of inspection and an outline of the results unless all apparatus, wires, etc., connected therewith are in strict conformity with the rules and regulations herein set forth; nor shall current be turned on any wiring apparatus until a certificate of satisfactory inspections issued. All electrical construction, all material and all apparatus used in connection with electric work and the operation of all electrical apparatus shall be in conformity with this article.

Sec. 3.413 When Permits are Not Required

No permit shall be required for the installation, maintenance, or alteration of wiring, apparatus, devices, appliances or equipment for telegraph, telephone, signal service or central stations protective service used in conveying signals or intelligence, except where electrical work is done on the primary side of the source of power at a voltage over 50 volts and of more than 500 watts. No permit shall be required for poles and guy anchors, for the installation, maintenance, or alteration of electric wiring, apparatus, devices, appliances, or equipment to be installed by an electric public service company for the use of such company in the generation, transmission, distribution, sale or utilization of electrical energy. However, an electric public service company shall not do any wiring on a customer's premises other than wiring which is a part of the company's distribution system, including metering equipment wherever located and transformer vaults in which company's transformers are located, nor shall any of its employees do any work other than that done for said company as herein before provided for, by virtue of this exemption.

Sec. 3.414 Electrical Permit Fees

Electrical permit fees shall be collected by the city as provided for in the fee schedule found in the appendix of this code.

Sec. 3.415 Licensing and Permit Provisions to be Met: Vehicles to be Marked

No corporation, partnership, association or individual shall cause or allow any electric wiring or apparatus to be installed, altered or changed in any building within the City of Katy unless the corporation, partnership, association or individual doing all of such work has been licensed under the provisions of this article to do that particular electric wiring and apparatus work. All vehicles used in carrying out work under the provisions of this article shall be clearly marked on the outside by lettering at least two (2") inches in height, giving the permit holder's name, address and telephone number.

Sec. 3.416 Unlawful to Interfere with Inspectors

City of Katy Code of Ordinances

No corporation, co-partnership, association, or individual or agent thereof, shall interfere with the chief electrical inspector or of any person or persons deputized to assist him/her as hereinbefore provided, while in the performance of duty, and each such interference shall be deemed to constitute a separate offense within the intent and meaning of this article.

Sec. 3.417 Transfer of Electrical Permit and/or License Prohibited

No corporation, partnership, association, or individual shall transfer any electrical permit, master electrician's license, journeyman electrician's license, maintenance or apprentice electrician's license, issued under the provisions of this article; nor do any electrical work covered by this article under any transferred electrical permit, master electrician's license, journeyman electrician's license, maintenance or apprentice electrician's license, shall be and is hereby illegal and void, and any corporation, partnership, association, or individual permitting the transfer of any permit, master electrician's license, journeyman, maintenance, or apprentice electrician's license, or permitting any electrical work covered by this article to be done by any corporation, partnership, association or individual, other than the one to whom any such permit, master electrician's license, journeyman electrician's license, maintenance or apprentice electrician's license is issued, shall be cause for revocation of their own permit or license, as the case may be.

Sec. 3.418 Master Electrician Responsible for Employees

Refusal to comply with the lawful requirements of an electrical inspector, bad faith, or unreasonable delay in the performance of any installation, alteration or changes of electrical wiring and apparatus or the correction of any defect pointed out by an electrical inspector covered by this article, shall subject the one so offending to a suspension of his/her license or revocation thereof, the master electrician shall be held responsible for any violation of this article by any one of his/her employees.

Sec. 3.419 Unlawful to Conceal Electrical Work Prior to Inspection

No corporation, co-partnership, association, or individual or agent thereof, shall hereafter conceal or cause to be concealed, any electric wiring or apparatus mentioned in this article except with the express permission of an electrical inspector.

Sec. 3.420 Liability of Persons Performing Work Under Terms of Article

This article shall not be construed to relieve or loosen the responsibility of any party owning, operating or controlling any electric wiring, apparatus, devices, appliances, fixtures or equipment for damages to person or property caused by any defect therein, nor shall the city be held as assuming by this article any such liability by reason of the inspection authorized herein, or the

City of Katy Code of Ordinances

certificates of approval issued as herein provided, or otherwise.

Sec. 3.421 Penalties

Any corporation, partnership, association or individual violating any of the terms or provisions of this article shall be guilty of a misdemeanor, and upon conviction, shall be fined as provided for in the general penalty provision found in Section 1.106 of this code. Each day a violation continues will be considered a separate offense.

(1979 Code of Ordinances, Chapter 3, Section 4)

ARTICLE 3.700 SMOKE DETECTORS IN DWELLING UNITS

Sec. 3.701 Definitions

In this article:

- (1) Bedroom shall mean any room which is designed with the intent that it be used for sleeping purposes.
- (2) Corridor shall mean a passage which connects parts of the dwelling unit.
- (3) Dwelling Unit shall mean a home, mobile home, duplex unit, apartment unit, condominium unit or any dwelling unit in a multi-unit residential structure. It also shall mean one (1) or more rooms which are subject to a single rental agreement and which are rented to a tenant or tenants for use by persons as a permanent residence.
- (4) Landlord shall mean the owner, lessor or sublessor of a dwelling unit. A managing agent or leasing agent, whether residing or officing on-site or offsite, shall be considered the agent of the landlord for purposes of notice and other communications required or allowed under this article. Otherwise, a manager or agent of the landlord shall be considered a landlord under this act only if the manager or agent purports to be the owner, lessor or sublessor in the rental agreement.
- (5) Smoke Detector shall mean a device which is (A) designed to detect visible or invisible products of combustion, (B) designed with an alarm audible to the bedrooms it serves, (C) powered by either battery, alternating current, or other power source, (D) tested and listed for use as a smoke detector by Underwriters Laboratories, Inc., Factory Mutual Research Corporation, or United States Testing Company, Inc., and (E) in good working order.
- (6) Tenant shall mean any person who is entitled to occupy a dwelling unit to the

City of Katy Code of Ordinances

exclusion of others and who is obligated to pay rent for the dwelling unit under a written or oral rental agreement.

- (7) Test of Smoke Detector shall mean the performance of the act or acts which the manufacturer of a smoke detector recommends for that particular model of smoke detector as a simple test of whether or not the smoke detector is in good working order.
- (8) Units constructed after September 1, 1981 means any unit for which a building permit was issued after September 1, 1981, or if no building permit is issued, any unit which is occupied as a residence for the first time after September 1, 1981.
- (9) Units constructed on or before September 1, 1981 shall mean any unit for which a building permit was issued on or before September 1, 1981, or which was occupied as a residence for the first time on or before such date.

Sec. 3.702 Duty to Install the New Units

(a) For all dwelling units constructed after the adoption of this article, at least one (1) smoke detector shall be installed by the landlord outside of each separate bedroom in the immediate vicinity of the bedroom, except that:

- (1) Where the dwelling units is designed with the intent that a single multi-purpose room be used for dining, living, and sleeping purposes, the smoke detector shall be located inside the room rather than outside:
- (2) Where the bedrooms are served by the same corridor, at least one (1) smoke detector shall be installed in the corridor in the immediate vicinity of the bedrooms; and,
- (3) Where one (1) or more bedrooms are located on a level above the cooking and living area, the smoke detector shall be placed at the center of the ceiling directly above the top of the stairway.

(b) A smoke detector required by this article shall be installed prior to commencement of possession of the dwelling unit by the tenant in accordance with the manufacturer's recommended procedures, subject to the following:

- (1) A smoke detector shall be installed on a ceiling or wall;
- (2) If installed on a ceiling, the smoke alarm shall be installed no closer than six inches (6") to a wall;

City of Katy Code of Ordinances

- (3) If installed on a wall, the smoke detector shall be installed no closer than six inches (6") to the ceiling and no further than twelve inches (12") from the ceiling;

City of Katy Code of Ordinances

- (4) A smoke detector may be located elsewhere if permitted by ordinance or by a local, city, county, or state fire marshal; and,
- (5) If a smoke detector is electrically operated rather than battery operated, the power system and installation procedures for the smoke detector shall comply with applicable local ordinances.

Sec. 3.703 Duty to Install in Existing Units

(a) For all dwelling units constructed before the adoption of this article, at least one (1) smoke detector shall be installed by the landlord in accordance with Section 3.702 above on or before September 1, 1984. A smoke detector required by this article shall be installed in accordance with the location and installation procedure requirements of Section 3.702. Installation of smoke detectors prior to September 1, 1984, shall be at the discretion of the landlord or tenant.

(b) Prior to September 1, 1984, a tenant may install a battery operated smoke detector in a unit covered by Section 3.703(a) without prior consent of the landlord, provided the smoke detector is installed in accordance with the location and installation procedure requirements of Section 3.702.

(c) At the end of the rental period or the renewal or extension of the rental period, the tenant may remove a smoke detector installed by the tenant; but the tenant shall be liable to the landlord for any unnecessary damages to the dwelling unit in removing the smoke detector.

Sec. 3.704 Duty to Inspect and Repair

(a) Upon commencement of a tenant's possession of a dwelling unit containing a smoke detector, the landlord shall have a duty to test the smoke detector to verify that it is in good working order. Upon installation of a smoke detector by a landlord after commencement of the tenant's possession of a dwelling unit, the landlord shall have a duty to test the smoke detector at that time to verify that it is in good working order.

(b) During the term of the rental agreement or any renewal or extension thereof, the landlord shall have a duty to inspect and repair a smoke detector only if the tenant has given notice to the landlord of malfunction or made a request to the landlord for inspection or repair. The notice to the landlord need not be in writing unless written notice is required in the written rental agreement. The landlord shall comply with the tenant's request for inspection and repair within a reasonable time, considering the availability of material, labor, and utilities.

(c) A landlord shall not have a duty to inspect or repair a smoke detector if the damage or malfunction is caused by the tenant or the tenant's family, guests, or invitees during the term of the rental agreement or any renewal or extension period of the rental agreement. Provided,

City of Katy Code of Ordinances

however, a landlord shall have a duty to repair or replace a smoke detector covered by this section if the tenant pays in advance for the reasonable cost of the repair or replacement, including labor, materials, taxes, and overhead.

(d) A landlord shall have satisfied his duty to inspect or repair a damaged or malfunctioning smoke detector if, after a test of the smoke detector, the test indicates that the smoke detector is in good working order.

Sec. 3.705 Duty to Replace Batteries

After commencement of possession by the tenant of a dwelling unit, the landlord shall have no duty to provide replacement batteries for a battery-operated smoke detector which was in good working order according to a test of the smoke detector at the time of commencement of possession by the tenant.

Sec. 3.706 Exemptions

This article shall not apply to dwelling units which are owner-occupied and not rented or leased to a tenant, in whole or in part, or nursing and convalescent homes licensed by the Texas Department of Health and certified to meet the Life Safety Code under federal law.

Sec. 3.707 Waiver

The landlord's duty of installation of smoke detectors under this article may not be waived.

Sec. 3.708 Penalty for Violations

Any landlord as herein defined violating any provision of this article shall be deemed guilty of a misdemeanor and upon conviction thereof shall be punishable by a fine as provided for in the general penalty provision found in Section 1.106 of this code. Each separate day or any portion thereof during which any violation of this article occurs or continues shall be deemed to constitute a separate offense, and upon conviction thereof shall be punishable as herein provided. The issuance or granting of a permit or approval of plans and specifications shall not be deemed or construed to be a permit for, or an approval of, any violation of any of the provisions of this article.

(1979 Code of Ordinances, Chapter 3, Section 8)

ORDINANCE NO. 2306

AN ORDINANCE AMENDING THE CITY OF KATY CODE OF ORDINANCES SECTION 9.504 SETTING MINIMUM STANDARDS FOR EXTENSION OF WATER SYSTEMS IN THE CITY OF KATY BY REQUIRING TRACER WIRES TO BE INSTALLED ON TOP OF EVERY PIPE; AUTHORIZING COMPRESSION FITTINGS ON CORPORATION STOPS AND CURB STOPS; REQUIRING STAINLESS STEEL BANDS AND BOLTS ON TAPS AND SLEEVES; REQUIRING INSTALLATION OF SENSUS RADIO READ METERS.

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF KATY, TEXAS, THAT:

I.

The Katy Code of Ordinances Chapter 9, Section; 9.504 is amended to read as set out on Exhibit A attached hereto and made a part hereof.

II.

This Ordinance shall become effective upon the adoption of this ordinance.

PASSED AND APPROVED in Katy, Texas, this 8 day of May 2006.

CITY OF KATY, TEXAS

By:


Doyle G. Callender, Mayor

ATTEST:


Virginia Herrington, City Secretary

APPROVED:

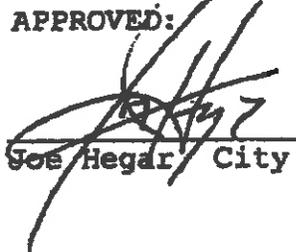

Joe Hegar, City Attorney

Exhibit A

Sec. 9.504 Water System

The following minimum standards apply to water system extensions within the City of Katy:

- (1) Main Lines.
 - (A) Minimum diameter ----- Six (6") inches.
 - (B) Depth ----- Three (3') feet, six (6") inches of cover below final grade.
 - (C) Material ----- C-900 PVC DR 18.
 - (D) Location ----- As per Figure I. Mains shall be looped, with no dead ends serving more than four (4) lots.
 - (E) Mains shall be looped with no dead ends serving more than 4 lots.
 - (F) Tracer wire shall be laid (continuous) on top of pipe and up through every valve box.
- (2) Valves.
 - (A) Locations ----- At tees: Two (2) valves. At crosses: Three (3) valves. At each connection to existing water system: One (1) valve.
 - (B) Type ----- Nonrising stem, O-ring seals, Mueller or Clow brand. Counter - clockwise opening, mechanical joint.
- (3) Fire Hydrants.
 - (A) Locations ----- At each street intersection and cul-de-sac end. Single family residential areas: six hundred (600') foot intervals, maximum. Commercial, including reserves: three hundred (300') foot intervals, minimum.
 - (B) Type ----- Mueller brand, 3 way 5 1/4" barrel with 4 1/2" steamer (pumper) nozzle and two (2) - 2 1/2 inch hose nozzles. Counter-clockwise opening, mechanical joint. Each fire hydrant is to have an individual gate valve (with adjustable riser box) located within 4 ft. of the fire hydrant.
- (4) Fittings.
 - (A) Material ----- Cast Iron, cement lined, mechanical joint. All fittings are to be thrust blocked with concrete. All fittings are to be wrapped with plastic or similar materials to prevent concrete from adhering to the mechanical joint connection components.
 - (B) Pressure rating ----- 250 psi.

(5) Services.

(A) Corporation stop ----- Mueller H-15000 (flare) or H-15008 (compression).

(B) Curb stop ----- Mueller B25168 (flare) or B25170 (compression), ending in an approved concreted or plastic meter box. (All boxes in new development are to be of the same material.)

(C) Meter nipple required ----- Mueller H 10896.

(D) Pipe material ----- Soft copper.

(E) Size ----- 1", one per each residential lot.

(F) Concrete or plastic meter box of appropriate size is required.

(G) All curbs are to be marked to indicate the location of the water services for each individual lot.

(H) Tap & Sleeve, Muller or Smith & Blair (stainless steel band and bolts, epoxy coated saddle).

(I) Sensus Radio read meters with MXU Assembly.

(6) Backfill.

(A) Under streets ----- Wrap water line with 6" layer of bank sand remainder of trench to be filled with 1.0 sack (100 psi) per cubic yard cement stabilized sand, compacted to 95% Proctor.

(B) Other locations ----- Wrap water line with a 6" layer of bank sand, remainder of trench to be filled using compacted native soil. Sandy soil must be water jetted; other soils may be compacted by rolling with a "caterpillar" tractor or similar method.

(C) All trenches are to be compacted to 95% Standard Proctor.



Stormwater Regulations for Construction Activities

CHAPTER 3 – ARTICLE 3.11 STORMWATER DISCHARGE FROM CONSTRUCTION SITES

Sec. 3.11.001 State permit rules adopted

The rules and regulations set forth in Texas Pollutant Discharge Elimination System (TPDES) General Permit No. TXR150000 relating to construction sites that discharge stormwater associated with construction activity located in the state and adopted by the state commission on environmental quality and effective March 5, 2013, are hereby adopted by the city and incorporated herein by reference thereto as if set forth in full herein, and shall govern and regulate stormwater discharges associated with construction activity within the city.

A copy of Texas Pollutant Discharge Elimination System (TPDES) General Permit No. TXR150000 is attached as exhibit A and incorporated herein for all purposes.

Sec. 3.11.002 Definitions

Unless the context indicates otherwise, words and phrases contained in this article shall be as set forth in TPDES General Permit No. TXR150000. In addition, the following words and phrases shall have the following meanings as used in this article:

TCEQ. The state commission on environmental quality, including all of its departments and divisions, or its successor agency.

TPDES General Permit No. TXR150000. That general permit to discharge wastes under the provisions of section 402 of the Clean Water Act and chapter 26 of the Texas Water Code TCEQ Docket No. 2012-0677-MIS, reissued February 19, 2013, and effective March 5, 2013.

Sec. 3.11.003 Stormwater pollution prevention plan required

No person shall commence construction activities on land located within the city that may result in disturbing an area equal to or greater than one (1) acre or less than one (1) acre as part of a larger common plan of development of land prior to preparing and obtaining approval of a stormwater prevention plan (the "plan") in compliance with part III of TPDES General Permit No. TXR150000 or obtaining a waiver of such requirement from TCEQ. As part of the plan, the public works director or designee may require a construction site waste management plan to identify the waste to be generated on the construction site and provide responsibility for its timely removal and disposition.



Stormwater Regulations for Construction Activities

Sec. 3.11.004 Post-construction stormwater management requirements

- (a) New development and redevelopment projects that disturb an area greater than or equal to one acre of land, including projects less than one (1) acre that are part of a larger common plan of development or sale, and discharge stormwater into the city's MS4, shall implement structural and/or non-structural best management practices ("BMP") to minimize impacts to water quality.
- (b) BMP published by the stormwater joint task force or by Environmental Protection Agency (EPA) guidance documents may be utilized to comply with this section.
- (c) The owner of the construction site described in subsection (a) of this section shall submit a post-construction stormwater management plan that incorporates the BMP to minimize water quality impacts prior to issuance of any permits.
- (d) All BMP shall be submitted to the public works director or her duly authorized representative for review and approval for construction sites on property located within the jurisdiction of the city, prior to the utilization of the proposed BMP.

Sec. 3.11.005 Operation and maintenance of post-construction best management practices

- (a) The owner of the construction site described in section 3.11.004 shall operate and maintain, and shall be solely responsible for the operation and maintenance of, the structural and/or non-structural BMP on the owner's construction site as the BMP were designed and approved.
- (b) The public works director, or such other city employee as may be designated by the public works director, shall have the authority to require the issuance of a performance bond, payable to the city, if it is deemed necessary to achieve compliance with this article.
- (c) The public works director, or other city employee as may be designated by the public works director, shall have the authority to require the owner or operator of a construction site, development, or redevelopment, to provide proof that the owner has obtained financial assurances sufficient to operate and maintain the structural and/or non-structural BMP previously approved by the public works director for the length of time that the structural and/or non-structural BMP will be utilized at the construction site.



Stormwater Regulations for Construction Activities

Sec. 3.11.006 Notification of violation

(a) The public works director, or other city employee as may be designated by the public works director, shall have the authority to serve a written notice of violation upon any person who is found to have violated, or who continues to violate, any provision of this article, or any order issued hereunder.

(b) Not later than seven (7) days after the issuance of a notice of violation served pursuant to this section, the person served with the notice of violation shall submit to the city authority issuing the notice of violation an explanation of the circumstances that resulted in the described violation and a plan for the satisfactory correction and prevention of reoccurrence of the described violation, which explanation shall include specific actions to be taken by the alleged violator.

(c) If the recipient of a notice of violation denies that any violation of this article has occurred or contends that no corrective action is necessary, such person shall submit to the public works director a written explanation of the basis of any such denial or contention not later than seven (7) days following issuance of the notice of violation.

(d) Submission of a written plan or explanation as provided in subsection (b) shall not be a defense to any alleged liability for any violations occurring before or after receipt of the notice of violation.

(e) Nothing in this section shall limit the authority of the city to take any action, including emergency action or any other enforcement action, prior to issuing a notice of violation.

Sec. 3.11.007 Stop work order

(a) The public works director, or such other city employee as may be designated by the public works director, shall have the authority to issue a stop work order to the owner and/or operator of a construction site upon finding that the owner or operator has violated, or continues to violate, any provision of this article, which stop work order shall be posted at the construction site.

(b) Unless written exception is made by the public works director, a stop work order issued pursuant to subsection (a) shall prohibit any further construction activity and shall bar any further inspection or approval by the city associated with a building permit, grading permit, subdivision plat approval, site development plan approval, or any other city approval necessary to commence or continue construction or to assume occupancy at the construction site, new development, or redevelopment.



Stormwater Regulations for Construction Activities

Sec. 3.11.007 Stop work order (continued)

(c) The issuance of a stop work order pursuant to this section shall not preclude nor serve as a prerequisite for taking any other action against the recipient of the stop work order.

(d) A stop work order issued pursuant to this section may be rescinded only by the public works director, or other city employee designated by the public works director, provided that the owner or operator of the construction site to which the stop work order applies has:

- (1) Paid a reinspection fee to the city in accordance with the current fee schedule of the city;
- (2) Provided written documentation indicating that all violations set forth in the stop work order have been corrected; and
- (3) Received from the city, following reinspection, written acknowledgement that all violations have in fact been corrected.

Sec. 3.11.008 Penalty

(a) Any person, firm or corporation violating any of the provisions or terms of this article shall, upon conviction, be punished by a fine not to exceed the sum of two thousand and no/100 dollars (\$2,000.00) for each offense and each and every day such violation shall continue shall be deemed to constitute a separate offense.

(b) The city may institute any appropriate actions or proceeding in a court of competent jurisdiction to enjoin the violation of this article. Nothing in this article shall preclude the city from seeking any and all injunctive or other relief allowed by state law even if a criminal complaint has been filed based on the same incident or event.

Sec. 3.11.009 Applicability of stricter regulations

In the event stricter rules or regulations are set forth elsewhere in this code or are otherwise promulgated by the TCEQ or the EPA regarding the same subject matter affected by this article, then the more stringent regulations shall apply.

Sec. 3.11.010 Priority of conflicting regulations

In the event any other provision of this code relating to stormwater pollution or discharge from a construction site irreconcilably conflicts with the provisions of this article, the provisions of this article shall be controlling.

(Ordinance 2613 adopted 1/27/14)



Stormwater Regulations for Construction Activities

Exhibit – A

TPDES General Permit No. TXR150000

Texas Commission on Environmental Quality

P.O. Box 13087, Austin, Texas 78711-3087



GENERAL PERMIT TO DISCHARGE UNDER THE TEXAS POLLUTANT DISCHARGE ELIMINATION SYSTEM

under provisions of
Section 402 of the Clean Water Act
and Chapter 26 of the Texas Water Code

This permit supersedes and replaces
TPDES General Permit No. TXR150000, issued March 5, 2008

Construction sites that discharge stormwater associated with construction activity
located in the state of Texas
may discharge to surface water in the state

only according to monitoring requirements and other conditions set forth in this general permit, as well as the rules of the Texas Commission on Environmental Quality (TCEQ or Commission), the laws of the State of Texas, and other orders of the Commission of the TCEQ. The issuance of this general permit does not grant to the permittee the right to use private or public property for conveyance of stormwater and certain non-stormwater discharges along the discharge route. This includes property belonging to but not limited to any individual, partnership, corporation or other entity. Neither does this general permit authorize any invasion of personal rights nor any violation of federal, state, or local laws or regulations. It is the responsibility of the permittee to acquire property rights as may be necessary to use the discharge route.

This general permit and the authorization contained herein shall expire at midnight, five years from the permit effective date.

EFFECTIVE DATE: March 5, 2013

ISSUED DATE: FEB 19 2013



For the Commission

**TPDES GENERAL PERMIT NUMBER TXR150000 RELATING TO
STORMWATER DISCHARGES ASSOCIATED WITH CONSTRUCTION
ACTIVITIES**

Table of Contents

Part I. Flow Chart and Definitions5

 Section A. Flow Chart to Determine Whether Coverage is Required5

 Section B. Definitions.....6

Part II. Permit Applicability and Coverage 12

 Section A. Discharges Eligible for Authorization..... 12

 1. Stormwater Associated with Construction Activity..... 12

 2. Discharges of Stormwater Associated with Construction Support Activities 12

 3. Non-Stormwater Discharges 12

 4. Other Permitted Discharges 13

 Section B. Concrete Truck Wash Out..... 13

 Section C. Limitations on Permit Coverage 13

 1. Post Construction Discharges..... 13

 2. Prohibition of Non-Stormwater Discharges 13

 3. Compliance With Water Quality Standards 13

 4. Impaired Receiving Waters and Total Maximum Daily Load (TMDL) Requirements..... 14

 5. Discharges to the Edwards Aquifer Recharge or Contributing Zone 14

 6. Discharges to Specific Watersheds and Water Quality Areas 14

 7. Protection of Streams and Watersheds by Other Governmental Entities..... 14

 8. Indian Country Lands..... 14

 9. Oil and Gas Production..... 15

 10. Stormwater Discharges from Agricultural Activities..... 15

 11. Endangered Species Act..... 15

 12. Other 15

 Section D. Deadlines for Obtaining Authorization to Discharge 15

 1. Large Construction Activities 15

 2. Small Construction Activities 15

 Section E. Obtaining Authorization to Discharge 16

 1. Automatic Authorization for Small Construction Activities With Low Potential for Erosion:..... 16

 2. Automatic Authorization For All Other Small Construction Activities:..... 17

 3. Authorization for Large Construction Activities: 17

4. Waivers for Small Construction Activities:.....	18
5. Effective Date of Coverage	18
6. Notice of Change (NOC)	18
7. Signatory Requirement for NOI Forms, Notice of Termination (NOT) Forms, NOC Letters, and Construction Site Notices	19
8. Contents of the NOI	19
Section F. Terminating Coverage.....	20
1. Notice of Termination (NOT) Required	20
2. Minimum Contents of the NOT	20
3. Termination of Coverage for Small Construction Sites and for Secondary Operators at Large Construction Sites.....	20
4. Transfer of Operational Control	21
Section G. Waivers from Coverage	21
1. Waiver Applicability and Coverage.....	22
2. Steps to Obtaining a Waiver	22
3. Effective Date of Waiver	22
4. Activities Extending Beyond the Waiver Period.....	22
Section H. Alternative TPDES Permit Coverage.....	23
1. Individual Permit Alternative.....	23
2. Individual Permit Required.....	23
3. Alternative Discharge Authorization	23
Section I. Permit Expiration.....	23
Part III. Stormwater Pollution Prevention Plans (SWP3).....	24
Section A. Shared SWP3 Development	24
Section B. Responsibilities of Operators.....	25
1. Secondary Operators and Primary Operators with Control Over Construction Plans and Specifications	25
2. Primary Operators with Day-to-Day Operational Control.....	25
Section C. Deadlines for SWP3 Preparation, Implementation, and Compliance	25
Section D. Plan Review and Making Plans Available	26
Section E. Revisions and Updates to SWP3s	26
Section F. Contents of SWP3	26
Section G. Erosion and Sediment Control Requirements Applicable to All Sites.....	34
Part IV. Stormwater Runoff from Concrete Batch Plants	35
Section A. Benchmark Sampling Requirements	35
Section B. Best Management Practices (BMPs) and SWP3 Requirements	37
Section C. Prohibition of Wastewater Discharges.....	39

Part V. Concrete Truck Wash Out Requirements 40

Part VI. Retention of Records..... 40

Part VII. Standard Permit Conditions 40

Part VIII. Fees 41

Appendix A: Automatic Authorization43


Appendix B: Erosivity Index (EI) Zones in Texas45

Appendix C: Isoerodent Map46

Appendix D: Erosivity Indices for EI Zones in Texas47

Part I. Flow Chart and Definitions

Section A. Flow Chart to Determine Whether Coverage is Required

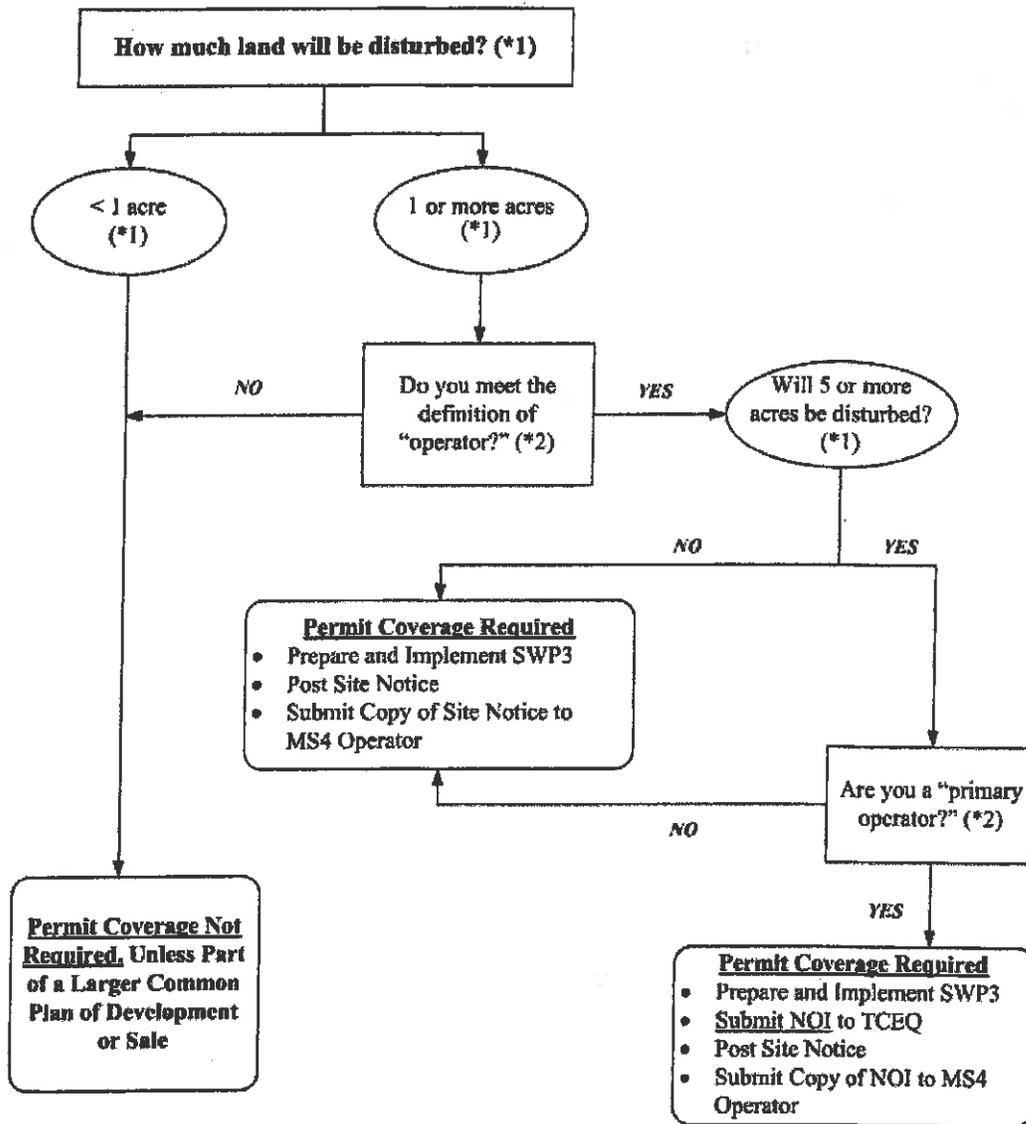

(*1) To determine the size of the construction project, use the size of the entire area to be disturbed, and include the size of the larger common plan of development or sale, if the project is part of a larger project (refer to Part I.B., "Definitions," for an explanation of "common plan of development or sale").

(*2) Refer to the definitions for "operator," "primary operator," and "secondary operator" in Part I., Section B. of this permit.

Section B. Definitions

Arid Areas - Areas with an average annual rainfall of 0 to 10 inches.

Best Management Practices (BMPs) - Schedules of activities, prohibitions of practices, maintenance procedures, structural controls, local ordinances, and other management practices to prevent or reduce the discharge of pollutants. BMPs also include treatment requirements, operating procedures, and practices to control construction site runoff, spills or leaks, waste disposal, or drainage from raw material storage areas.

Commencement of Construction - The initial disturbance of soils associated with clearing, grading, or excavation activities, as well as other construction-related activities (e.g., stockpiling of fill material, demolition).

Common Plan of Development - A construction activity that is completed in separate stages, separate phases, or in combination with other construction activities. A common plan of development (also known as a "common plan of development or sale") is identified by the documentation for the construction project that identifies the scope of the project, and may include plats, blueprints, marketing plans, contracts, building permits, a public notice or hearing, zoning requests, or other similar documentation and activities. A common plan of development does not necessarily include all construction projects within the jurisdiction of a public entity (e.g., a city or university). Construction of roads or buildings in different parts of the jurisdiction would be considered separate "common plans," with only the interconnected parts of a project being considered part of a "common plan" (e.g., a building and its associated parking lot and driveways, airport runway and associated taxiways, a building complex, etc.). Where discrete construction projects occur within a larger common plan of development or sale but are located ¼ mile or more apart, and the area between the projects is not being disturbed, each individual project can be treated as a separate plan of development or sale, provided that any interconnecting road, pipeline or utility project that is part of the same "common plan" is not included in the area to be disturbed.

Construction Activity - Includes soil disturbance activities, including clearing, grading, and excavating; and does not include routine maintenance that is performed to maintain the original line and grade, hydraulic capacity, or original purpose of the site (e.g., the routine grading of existing dirt roads, asphalt overlays of existing roads, the routine clearing of existing right-of-ways, and similar maintenance activities). Regulated construction activity is defined in terms of small and large construction activity.

Dewatering - The act of draining rainwater or groundwater from building foundations, vaults, and trenches.

Discharge - For the purposes of this permit, the drainage, release, or disposal of pollutants in stormwater and certain non-stormwater from areas where soil disturbing activities (e.g., clearing, grading, excavation, stockpiling of fill material, and demolition), construction materials or equipment storage or maintenance (e.g., fill piles, borrow area, concrete truck wash out, fueling), or other industrial stormwater directly related to the construction process (e.g., concrete or asphalt batch plants) are located.

Drought-Stricken Area - For the purposes of this permit, an area in which the National Oceanic and Atmospheric Administration's U.S. Seasonal Drought Outlook indicates for the period during which the construction will occur that any of the following conditions are likely: (1) "Drought to persist or intensify", (2) "Drought ongoing, some improvement", (3) "Drought likely to improve, impacts ease", or (4) "Drought development likely". See http://www.cpc.ncep.noaa.gov/products/expert_assessment/seasonal_drought.html.

Edwards Aquifer - As defined under Texas Administrative Code (TAC) § 213.3 of this title (relating to the Edwards Aquifer), that portion of an arcuate belt of porous, water-bearing, predominantly carbonate rocks known as the Edwards and Associated Limestones in the Balcones Fault Zone trending from west to east to northeast in Kinney, Uvalde, Medina, Bexar, Comal, Hays, Travis, and Williamson Counties; and composed of the Salmon Peak

Limestone, McKnight Formation, West Nueces Formation, Devil's River Limestone, Person Formation, Kainer Formation, Edwards Formation, and Georgetown Formation. The permeable aquifer units generally overlie the less-permeable Glen Rose Formation to the south, overlie the less-permeable Comanche Peak and Walnut Formations north of the Colorado River, and underlie the less-permeable Del Rio Clay regionally.

Edwards Aquifer Recharge Zone - Generally, that area where the stratigraphic units constituting the Edwards Aquifer crop out, including the outcrops of other geologic formations in proximity to the Edwards Aquifer, where caves, sinkholes, faults, fractures, or other permeable features would create a potential for recharge of surface waters into the Edwards Aquifer. The recharge zone is identified as that area designated as such on official maps located in the offices of the Texas Commission on Environmental Quality (TCEQ) and the appropriate regional office. The Edwards Aquifer Map Viewer, located at http://www.tceq.texas.gov/compliance/field_ops/eapp/mapdisclaimer.html, can be used to determine where the recharge zone is located.

Edwards Aquifer Contributing Zone - The area or watershed where runoff from precipitation flows downgradient to the recharge zone of the Edwards Aquifer. The contributing zone is located upstream (upgradient) and generally north and northwest of the recharge zone for the following counties: all areas within Kinney County, except the area within the watershed draining to Segment No. 2304 of the Rio Grande Basin; all areas within Uvalde, Medina, Bexar, and Comal Counties; all areas within Hays and Travis Counties, except the area within the watersheds draining to the Colorado River above a point 1.3 miles upstream from Tom Miller Dam, Lake Austin at the confluence of Barrow Brook Cove, Segment No. 1403 of the Colorado River Basin; and all areas within Williamson County, except the area within the watersheds draining to the Lampasas River above the dam at Stillhouse Hollow reservoir, Segment No. 1216 of the Brazos River Basin. The contributing zone is illustrated on the Edwards Aquifer map viewer at http://www.tceq.texas.gov/compliance/field_ops/eapp/mapdisclaimer.html.

Effluent Limitations Guideline (ELG) – Defined in 40 Code of Federal Regulations (CFR) § 122.2 as a regulation published by the Administrator under § 304(b) of the Clean Water Act (CWA) to adopt or revise effluent limitations.

Facility or Activity – For the purpose of this permit, a construction site or construction support activity that is regulated under this general permit, including all contiguous land and fixtures (for example, ponds and materials stockpiles), structures, or appurtenances used at a construction site or industrial site described by this general permit.

Final Stabilization - A construction site status where any of the following conditions are met:

- A. All soil disturbing activities at the site have been completed and a uniform (that is, evenly distributed, without large bare areas) perennial vegetative cover with a density of at least 70% of the native background vegetative cover for the area has been established on all unpaved areas and areas not covered by permanent structures, or equivalent permanent stabilization measures (such as the use of riprap, gabions, or geotextiles) have been employed.
- B. For individual lots in a residential construction site by either:
 - (1) the homebuilder completing final stabilization as specified in condition (a) above; or
 - (2) the homebuilder establishing temporary stabilization for an individual lot prior to the time of transfer of the ownership of the home to the buyer and after informing the homeowner of the need for, and benefits of, final stabilization. If temporary stabilization is not feasible, then the homebuilder may fulfill this requirement by retaining perimeter controls or BMPs, and informing the homeowner of the need for removal of temporary controls and the establishment of final stabilization.

Fullfillment of this requirement must be documented in the homebuilder's stormwater pollution prevention plan (SWP3).

- C. For construction activities on land used for agricultural purposes (such as pipelines across crop or range land), final stabilization may be accomplished by returning the disturbed land to its preconstruction agricultural use. Areas disturbed that were not previously used for agricultural activities, such as buffer strips immediately adjacent to surface water and areas that are not being returned to their preconstruction agricultural use must meet the final stabilization conditions of condition (a) above.
- D. In arid, semi-arid, and drought-stricken areas only, all soil disturbing activities at the site have been completed and both of the following criteria have been met:
- (1) Temporary erosion control measures (for example, degradable rolled erosion control product) are selected, designed, and installed along with an appropriate seed base to provide erosion control for at least three years without active maintenance by the operator, and
 - (2) The temporary erosion control measures are selected, designed, and installed to achieve 70% of the native background vegetative coverage within three years.

Hyperchlorination of Waterlines – Treatment of potable water lines or tanks with chlorine for disinfection purposes, typically following repair or partial replacement of the waterline or tank, and subsequently flushing the contents.

Impaired Water - A surface water body that is identified on the latest approved CWA §303(d) List as not meeting applicable state water quality standards. Impaired waters include waters with approved or established total maximum daily loads (TMDLs), and those where a TMDL has been proposed by TCEQ but has not yet been approved or established.

Indian Country Land – (from 40 CFR §122.2) (1) all land within the limits of any Indian reservation under the jurisdiction of the United States government, notwithstanding the issuance of any patent, and, including rights-of-way running through the reservation; (2) all dependent Indian communities with the borders of the United States whether within the originally or subsequently acquired territory thereof, and whether within or without the limits of a state; and (3) all Indian allotments, the Indian titles to which have not been extinguished, including rights-of-way running through the same.

Indian Tribe - (from 40 CFR §122.2) any Indian Tribe, band, group, or community recognized by the Secretary of the Interior and exercising governmental authority over a Federal Indian Reservation.

Large Construction Activity - Construction activities including clearing, grading, and excavating that result in land disturbance of equal to or greater than five (5) acres of land. Large construction activity also includes the disturbance of less than five (5) acres of total land area that is part of a larger common plan of development or sale if the larger common plan will ultimately disturb equal to or greater than five (5) acres of land. Large construction activity does not include routine maintenance that is performed to maintain the original line and grade, hydraulic capacity, or original purpose of the site (for example, the routine grading of existing dirt roads, asphalt overlays of existing roads, the routine clearing of existing right-of-ways, and similar maintenance activities.)

Linear Project – Includes the construction of roads, bridges, conduits, substructures, pipelines, sewer lines, towers, poles, cables, wires, connectors, switching, regulating and transforming equipment and associated ancillary facilities in a long, narrow area.

Minimize - To reduce or eliminate to the extent achievable using stormwater controls that are technologically available and economically practicable and achievable in light of best industry practices.

Municipal Separate Storm Sewer System (MS4) - A separate storm sewer system owned or operated by the United States, a state, city, town, county, district, association, or other public body (created by or pursuant to state law) having jurisdiction over the disposal of sewage, industrial wastes, stormwater, or other wastes, including special districts under state law such as a sewer district, flood control or drainage district, or similar entity, or an Indian tribe or an authorized Indian tribal organization, that discharges to surface water in the state.

Notice of Change (NOC) – Written notification to the executive director from a discharger authorized under this permit, providing changes to information that was previously provided to the agency in a notice of intent form.

Notice of Intent (NOI) - A written submission to the executive director from an applicant requesting coverage under this general permit.

Notice of Termination (NOT) - A written submission to the executive director from a discharger authorized under a general permit requesting termination of coverage.

Operator - The person or persons associated with a large or small construction activity that is either a primary or secondary operator as defined below:

Primary Operator – the person or persons associated with a large or small construction activity that meets either of the following two criteria:

- (a) the person or persons have on-site operational control over construction plans and specifications, including the ability to make modifications to those plans and specifications; or
- (b) the person or persons have day-to-day operational control of those activities at a construction site that are necessary to ensure compliance with a Storm Water Pollution Prevention Plan (SWP3) for the site or other permit conditions (for example, they are authorized to direct workers at a site to carry out activities required by the SWP3 or comply with other permit conditions).

Secondary Operator – The person or entity, often the property owner, whose operational control is limited to:

- (a) the employment of other operators, such as a general contractor, to perform or supervise construction activities; or
- (b) the ability to approve or disapprove changes to construction plans and specifications, but who does not have day-to-day on-site operational control over construction activities at the site.

Secondary operators must either prepare their own SWP3 or participate in a shared SWP3 that covers the areas of the construction site where they have control over the plans and specifications.

If there is not a primary operator at the construction site, then the secondary operator is defined as the primary operator and must comply with the requirements for primary operators.

Outfall - For the purpose of this permit, a point source at the point where stormwater runoff associated with construction activity discharges to surface water in the state and does not include open conveyances connecting two municipal separate storm sewers, or pipes, tunnels, or other conveyances that connect segments of the same stream or other water of the U.S. and are used to convey waters of the U.S.

Permittee - An operator authorized under this general permit. The authorization may be gained through submission of a notice of intent, by waiver, or by meeting the requirements for automatic coverage to discharge stormwater runoff and certain non-stormwater discharges.

Point Source – (from 40 CFR §122.2) Any discernible, confined, and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock concentrated animal feeding operation, landfill leachate collection system, vessel or other floating craft from which pollutants are, or may be, discharged. This term does not include return flows from irrigated agriculture or agricultural stormwater runoff.

Pollutant - Dredged spoil, solid waste, incinerator residue, sewage, garbage, sewage sludge, filter backwash, munitions, chemical wastes, biological materials, radioactive materials, heat, wrecked or discarded equipment, rock, sand, cellar dirt, and industrial, municipal, and agricultural waste discharged into any surface water in the state. The term "pollutant" does not include tail water or runoff water from irrigation or rainwater runoff from cultivated or uncultivated rangeland, pastureland, and farmland. For the purpose of this permit, the term "pollutant" includes sediment.

Pollution - (from Texas Water Code (TWC) §26.001(14)) The alteration of the physical, thermal, chemical, or biological quality of, or the contamination of, any surface water in the state that renders the water harmful, detrimental, or injurious to humans, animal life, vegetation, or property or to public health, safety, or welfare, or impairs the usefulness or the public enjoyment of the water for any lawful or reasonable purpose.

Rainfall Erosivity Factor (R factor) - the total annual erosive potential that is due to climatic effects, and is part of the Revised Universal Soil Loss Equation (RUSLE).

Receiving Water - A "Water of the United States" as defined in 40 CFR §122.2 into which the regulated stormwater discharges.

Semiarid Areas - areas with an average annual rainfall of 10 to 20 inches

Separate Storm Sewer System - A conveyance or system of conveyances (including roads with drainage systems, streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains), designed or used for collecting or conveying stormwater; that is not a combined sewer, and that is not part of a publicly owned treatment works (POTW).

Small Construction Activity - Construction activities including clearing, grading, and excavating that result in land disturbance of equal to or greater than one (1) acre and less than five (5) acres of land. Small construction activity also includes the disturbance of less than one (1) acre of total land area that is part of a larger common plan of development or sale if the larger common plan will ultimately disturb equal to or greater than one (1) and less than five (5) acres of land. Small construction activity does not include routine maintenance that is performed to maintain the original line and grade, hydraulic capacity, or original purpose of the site (for example, the routine grading of existing dirt roads, asphalt overlays of existing roads, the routine clearing of existing right-of-ways, and similar maintenance activities.)

Steep Slopes – Where a state, Tribe, local government, or industry technical manual (e.g. stormwater BMP manual) has defined what is to be considered a "steep slope", this permit's definition automatically adopts that definition. Where no such definition exists, steep slopes are automatically defined as those that are 15 percent or greater in grade.

Stormwater (or Stormwater Runoff) - Rainfall runoff, snow melt runoff, and surface runoff and drainage.

Stormwater Associated with Construction Activity - Stormwater runoff from a construction activity where soil disturbing activities (including clearing, grading, excavating) result in the disturbance of one (1) or more acres of total land area, or are part of a larger common plan of development or sale that will result in disturbance of one (1) or more acres of total land area.

Structural Control (or Practice) - A pollution prevention practice that requires the construction of a device, or the use of a device, to reduce or prevent pollution in stormwater

runoff. Structural controls and practices may include but are not limited to: silt fences, earthen dikes, drainage swales, sediment traps, check dams, subsurface drains, storm drain inlet protection, rock outlet protection, reinforced soil retaining systems, gabions, and temporary or permanent sediment basins.

Surface Water in the State - Lakes, bays, ponds, impounding reservoirs, springs, rivers, streams, creeks, estuaries, wetlands, marshes, inlets, canals, the Gulf of Mexico inside the territorial limits of the state (from the mean high water mark (MHW) out 10.36 miles into the Gulf), and all other bodies of surface water, natural or artificial, inland or coastal, fresh or salt, navigable or nonnavigable, and including the beds and banks of all water-courses and bodies of surface water, that are wholly or partially inside or bordering the state or subject to the jurisdiction of the state; except that waters in treatment systems which are authorized by state or federal law, regulation, or permit, and which are created for the purpose of waste treatment are not considered to be water in the state.

Temporary Stabilization - A condition where exposed soils or disturbed areas are provided a protective cover or other structural control to prevent the migration of pollutants. Temporary stabilization may include temporary seeding, geotextiles, mulches, and other techniques to reduce or eliminate erosion until either permanent stabilization can be achieved or until further construction activities take place.

Total Maximum Daily Load (TMDL) - The total amount of a pollutant that a water body can assimilate and still meet the Texas Surface Water Quality Standards.

Turbidity - A condition of water quality characterized by the presence of suspended solids and/or organic material.

Waters of the United States - (from 40 CFR §122.2) Waters of the United States or waters of the U.S. means:

- (a) all waters which are currently used, were used in the past, or may be susceptible to use in interstate or foreign commerce, including all waters which are subject to the ebb and flow of the tide;
- (b) all interstate waters, including interstate wetlands;
- (c) all other waters such as intrastate lakes, rivers, streams (including intermittent streams), mudflats, sandflats, wetlands, sloughs, prairie potholes, wet meadows, playa lakes, or natural ponds that the use, degradation, or destruction of which would affect or could affect interstate or foreign commerce including any such waters:
 - (1) which are or could be used by interstate or foreign travelers for recreational or other purposes;
 - (2) from which fish or shellfish are or could be taken and sold in interstate or foreign commerce; or
 - (3) which are used or could be used for industrial purposes by industries in interstate commerce;
- (d) all impoundments of waters otherwise defined as waters of the United States under this definition;
- (e) tributaries of waters identified in paragraphs (a) through (d) of this definition;
- (f) the territorial sea; and
- (g) wetlands adjacent to waters (other than waters that are themselves wetlands) identified in paragraphs (a) through (f) of this definition.

Waste treatment systems, including treatment ponds or lagoons designed to meet the requirements of CWA (other than cooling ponds as defined in 40 CFR §423.11(m) which also meet the criteria of this definition) are not waters of the U.S. This exclusion applies only to manmade bodies of water which neither were originally created in waters of the U.S. (such as

disposal area in wetlands) nor resulted from the impoundment of waters of the U.S. Waters of the U.S. do not include prior converted cropland. Notwithstanding the determination of an area's status as prior converted cropland by any other federal agency, for the purposes of the CWA, the final authority regarding CWA jurisdiction remains with EPA.

Part II. Permit Applicability and Coverage

Section A. Discharges Eligible for Authorization

1. Stormwater Associated with Construction Activity

Discharges of stormwater runoff from small and large construction activities may be authorized under this general permit.

2. Discharges of Stormwater Associated with Construction Support Activities

Examples of construction support activities include, but are not limited to, concrete batch plants, rock crushers, asphalt batch plants, equipment staging areas, material storage yards, material borrow areas, and excavated material disposal areas. Construction support activities authorized under this general permit are not commercial operations, and do not serve multiple unrelated construction projects. Discharges of stormwater runoff from construction support activities may be authorized under this general permit, provided that the following conditions are met:

- (a) the activities are located within one (1) mile from the boundary of the permitted construction site and directly support the construction activity;
- (b) an SWP3 is developed for the permitted construction site according to the provisions of this general permit, and includes appropriate controls and measures to reduce erosion and discharge of pollutants in stormwater runoff from the construction support activities; and
- (c) the construction support activities either do not operate beyond the completion date of the construction activity or, at the time that they do, are authorized under separate Texas Pollutant Discharge Elimination System (TPDES) authorization. Separate TPDES authorization may include the TPDES Multi Sector General Permit (MSGP), TXR050000 (related to stormwater discharges associated with industrial activity), separate authorization under this general permit if applicable, coverage under an alternative general permit if available, or authorization under an individual water quality permit.

3. Non-Stormwater Discharges

The following non-stormwater discharges from sites authorized under this general permit are also eligible for authorization under this general permit:

- (a) discharges from fire fighting activities (fire fighting activities do not include washing of trucks, run-off water from training activities, test water from fire suppression systems, or similar activities);
- (b) uncontaminated fire hydrant flushings (excluding discharges of hyperchlorinated water, unless the water is first dechlorinated and discharges are not expected to adversely affect aquatic life), which include flushings from systems that utilize potable water, surface water, or groundwater that does not contain additional pollutants (uncontaminated fire hydrant flushings do not include systems utilizing reclaimed wastewater as a source water);
- (c) water from the routine external washing of vehicles, the external portion of buildings or structures, and pavement, where detergents and soaps are not used, where spills or leaks of toxic or hazardous materials have not occurred (unless spilled materials

have been removed; and if local state, or federal regulations are applicable, the materials are removed according to those regulations), and where the purpose is to remove mud, dirt, or dust;

- (d) uncontaminated water used to control dust;
- (e) potable water sources, including waterline flushings, but excluding discharges of hyperchlorinated water, unless the water is first dechlorinated and discharges are not expected to adversely affect aquatic life;
- (f) uncontaminated air conditioning condensate;
- (g) uncontaminated ground water or spring water, including foundation or footing drains where flows are not contaminated with industrial materials such as solvents; and
- (h) lawn watering and similar irrigation drainage.

4. Other Permitted Discharges

Any discharge authorized under a separate National Pollutant Discharge Elimination System (NPDES), TPDES, or TCEQ permit may be combined with discharges authorized by this general permit, provided those discharges comply with the associated permit.

Section B. Concrete Truck Wash Out

The wash out of concrete trucks at regulated construction sites must be performed in accordance with the requirements of Part V of this general permit.

Section C. Limitations on Permit Coverage

1. Post Construction Discharges

Discharges that occur after construction activities have been completed, and after the construction site and any supporting activity site have undergone final stabilization, are not eligible for coverage under this general permit. Discharges originating from the sites are not authorized under this general permit following the submission of the notice of termination (NOT) or removal of the appropriate site notice, as applicable, for the regulated construction activity.

2. Prohibition of Non-Stormwater Discharges

Except as otherwise provided in Part II.A. of this general permit, only discharges that are composed entirely of stormwater associated with construction activity may be authorized under this general permit.

3. Compliance With Water Quality Standards

Discharges to surface water in the state that would cause, have the reasonable potential to cause, or contribute to a violation of water quality standards or that would fail to protect and maintain existing designated uses are not eligible for coverage under this general permit. The executive director may require an application for an individual permit or alternative general permit (see Parts II.H.2. and 3.) to authorize discharges to surface water in the state if the executive director determines that any activity will cause, has the reasonable potential to cause, or contribute to a violation of water quality standards or is found to cause, has the reasonable potential to cause, or contribute to, the impairment of a designated use. The executive director may also require an application for an individual permit considering factors described in Part II.H.2. of this general permit.

4. Impaired Receiving Waters and Total Maximum Daily Load (TMDL) Requirements

New sources or new discharges of the pollutants of concern to impaired waters are not authorized by this permit unless otherwise allowable under 30 TAC Chapter 305 and applicable state law. Impaired waters are those that do not meet applicable water quality standards and are listed on the EPA approved CWA §303(d) List. Pollutants of concern are those for which the water body is listed as impaired.

Discharges of the pollutants of concern to impaired water bodies for which there is a TMDL are not eligible for this general permit unless they are consistent with the approved TMDL. Permittees must incorporate the conditions and requirements applicable to their discharges into their SWP3, in order to be eligible for coverage under this general permit. For consistency with the construction stormwater-related items in an approved TMDL, the SWP3 must be consistent with any applicable condition, goal, or requirement in the TMDL, TMDL Implementation Plan (I-Plan), or as otherwise directed by the executive director.

5. Discharges to the Edwards Aquifer Recharge or Contributing Zone

Discharges cannot be authorized by this general permit where prohibited by 30 TAC Chapter 213 (relating to Edwards Aquifer). In addition, commencement of construction (i.e., the initial disturbance of soils associated with clearing, grading, or excavating activities, as well as other construction-related activities such as stockpiling of fill material and demolition) at a site regulated under 30 TAC Chapter 213, may not begin until the appropriate Edwards Aquifer Protection Plan (EAPP) has been approved by the TCEQ's Edwards Aquifer Protection Program.

- (a) For new discharges located within the Edwards Aquifer Recharge Zone, or within that area upstream from the recharge zone and defined as the Contributing Zone (CZ), operators must meet all applicable requirements of, and operate according to, 30 TAC Chapter 213 (Edwards Aquifer Rule) in addition to the provisions and requirements of this general permit.
- (b) For existing discharges located within the Edwards Aquifer Recharge Zone, the requirements of the agency-approved Water Pollution Abatement Plan (WPAP) under the Edwards Aquifer Rule is in addition to the requirements of this general permit. BMPs and maintenance schedules for structural stormwater controls, for example, may be required as a provision of the rule. All applicable requirements of the Edwards Aquifer Rule for reductions of suspended solids in stormwater runoff are in addition to the requirements in this general permit for this pollutant.

6. Discharges to Specific Watersheds and Water Quality Areas

Discharges otherwise eligible for coverage cannot be authorized by this general permit where prohibited by 30 TAC Chapter 311 (relating to Watershed Protection) for water quality areas and watersheds.

7. Protection of Streams and Watersheds by Other Governmental Entities

This general permit does not limit the authority or ability of federal, other state, or local governmental entities from placing additional or more stringent requirements on construction activities or discharges from construction activities. For example, this permit does not limit the authority of a home-rule municipality provided by Texas Local Government Code §401.002.

8. Indian Country Lands

Stormwater runoff from construction activities occurring on Indian Country lands are not under the authority of the TCEQ and are not eligible for coverage under this general permit. If discharges of stormwater require authorization under federal NPDES

regulations, authority for these discharges must be obtained from the U.S. Environmental Protection Agency (EPA).

9. Oil and Gas Production

Stormwater runoff from construction activities associated with the exploration, development, or production of oil or gas or geothermal resources, including transportation of crude oil or natural gas by pipeline, are not under the authority of the TCEQ and are not eligible for coverage under this general permit. If discharges of stormwater require authorization under federal NPDES regulations, authority for these discharges must be obtained from the EPA.

10. Stormwater Discharges from Agricultural Activities

Stormwater discharges from agricultural activities that are not point source discharges of stormwater are not subject to TPDES permit requirements. These activities may include clearing and cultivating ground for crops, construction of fences to contain livestock, construction of stock ponds, and other similar agricultural activities. Discharges of stormwater runoff associated with the construction of facilities that are subject to TPDES regulations, such as the construction of concentrated animal feeding operations, would be point sources regulated under this general permit.

11. Endangered Species Act

Discharges that would adversely affect a listed endangered or threatened aquatic or aquatic-dependent species or its critical habitat are not authorized by this permit, unless the requirements of the Endangered Species Act are satisfied. Federal requirements related to endangered species apply to all TPDES permitted discharges and site-specific controls may be required to ensure that protection of endangered or threatened species is achieved. If a permittee has concerns over potential impacts to listed species, the permittee may contact TCEQ for additional information.

12. Other

Nothing in Part II of the general permit is intended to negate any person's ability to assert the force majeure (act of God, war, strike, riot, or other catastrophe) defenses found in 30 TAC §70.7.

Section D. Deadlines for Obtaining Authorization to Discharge

1. Large Construction Activities
 - (a) New Construction - Discharges from sites where the commencement of construction occurs on or after the effective date of this general permit must be authorized, either under this general permit or a separate TPDES permit, prior to the commencement of those construction activities.
 - (b) Ongoing Construction - Operators of large construction activities continuing to operate after the effective date of this permit, and authorized under TPDES general permit TXR150000 (effective on March 5, 2008), must submit an NOI to renew authorization or a NOT to terminate coverage under this general permit within 90 days of the effective date of this general permit. During this interim period, as a requirement of this TPDES permit, the operator must continue to meet the conditions and requirements of the previous TPDES permit.
2. Small Construction Activities
 - (a) New Construction - Discharges from sites where the commencement of construction occurs on or after the effective date of this general permit must be authorized, either

under this general permit or a separate TPDES permit, prior to the commencement of those construction activities.

- (b) Ongoing Construction - Discharges from ongoing small construction activities that commenced prior to the effective date of this general permit, and that would not meet the conditions to qualify for termination of this permit as described in Part II.E. of this general permit, must meet the requirements to be authorized, either under this general permit or a separate TPDES permit, within 90 days of the effective date of this general permit. During this interim period, as a requirement of this TPDES permit, the operator must continue to meet the conditions and requirements of the previous TPDES permit.

Section E. Obtaining Authorization to Discharge

1. Automatic Authorization for Small Construction Activities With Low Potential for Erosion:

If all of the following conditions are met, then a small construction activity is determined to occur during periods of low potential for erosion, and a site operator may be automatically authorized under this general permit without being required to develop an SWP3 or submit an NOI:

- (a) the construction activity occurs in a county listed in Appendix A;
- (b) the construction activity is initiated and completed, including either final or temporary stabilization of all disturbed areas, within the time frame identified in Appendix A for the location of the construction site;
- (c) all temporary stabilization is adequately maintained to effectively reduce or prohibit erosion, permanent stabilization activities have been initiated, and a condition of final stabilization is completed no later than 30 days following the end date of the time frame identified in Appendix A for the location of the construction site;
- (d) the permittee signs a completed TCEQ construction site notice, including the certification statement;
- (e) a signed copy of the construction site notice is posted at the construction site in a location where it is readily available for viewing by the general public, local, state, and federal authorities prior to commencing construction activities, and maintained in that location until completion of the construction activity;
- (f) a copy of the signed and certified construction site notice is provided to the operator of any MS4 receiving the discharge at least two days prior to commencement of construction activities;
- (g) any supporting concrete batch plant or asphalt batch plant is separately authorized for discharges of stormwater runoff or other non-stormwater discharges under an individual TPDES permit, another TPDES general permit, or under an individual TCEQ permit where stormwater and non-stormwater is disposed of by evaporation or irrigation (discharges are adjacent to water in the state); and
- (h) any non-stormwater discharges are either authorized under a separate permit or authorization, or are not considered to be a wastewater.

Part II.G. of this general permit describes how an operator may apply for and obtain a waiver from permitting, for certain small construction activities that occur during a period with a low potential for erosion, where automatic authorization under this section is not available.

2. Automatic Authorization For All Other Small Construction Activities:

Operators of small construction activities not described in Part II.E.1. above may be automatically authorized under this general permit, and operators of these sites shall not be required to submit an NOI, provided that they meet all of the following conditions:

- (a) develop a SWP3 according to the provisions of this general permit, that covers either the entire site or all portions of the site for which the applicant is the operator, and implement that plan prior to commencing construction activities;
- (b) sign and certify a completed TCEQ small construction site notice, post the notice at the construction site in a location where it is safely and readily available for viewing by the general public, local, state, and federal authorities, prior to commencing construction, and maintain the notice in that location until completion of the construction activity (for linear construction activities, e.g. pipeline or highway, the site notice must be placed in a publicly accessible location near where construction is actively underway; notice for these linear sites may be relocated, as necessary, along the length of the project, and the notice must be safely and readily available for viewing by the general public; local, state, and federal authorities); and
- (c) provide a copy of the signed and certified construction site notice to the operator of any municipal separate storm sewer system receiving the discharge prior to commencement of construction activities.

Operators of small construction activities as defined in Part I.B of this general permit shall not submit an NOI for coverage unless otherwise required by the executive director.

As described in Part I (Definitions) of this general permit, large construction activities include those that will disturb less than five (5) acres of land, but that are part of a larger common plan of development or sale that will ultimately disturb five (5) or more acres of land, and must meet the requirements of Part II.E.3. below.

3. Authorization for Large Construction Activities:

Operators of large construction activities that qualify for coverage under this general permit must meet all of the following conditions:

- (a) develop a SWP3 according to the provisions of this general permit that covers either the entire site or all portions of the site for which the applicant is the operator, and implement that plan prior to commencing construction activities;
- (b) primary operators must submit an NOI, using a form provided by the executive director, at least seven (7) days prior to commencing construction activities, or if utilizing electronic submittal, prior to commencing construction activities. If an additional primary operator is added after the initial NOI is submitted, the new primary operator must submit an NOI at least seven (7) days before assuming operational control, or if utilizing electronic NOI submittal, prior to assuming operational control. If the primary operator changes after the initial NOI is submitted, the new primary operator must submit a paper NOI or an electronic NOI at least ten (10) days before assuming operational control;
- (c) all operators of large construction activities must post a site notice in accordance with Part III.D.2. of this permit. The site notice must be located where it is safely and readily available for viewing by the general public, local, state, and federal authorities prior to commencing construction, and must be maintained in that location until completion of the construction activity (for linear construction activities, e.g. pipeline or highway, the site notice must be placed in a publicly accessible location near where construction is actively underway; notice for these linear sites may be relocated, as necessary, along the length of the project, and the notice must be safely and readily available for viewing by the general public; local, state, and federal authorities);

- (d) prior to commencing construction activities, all primary operators must (1) provide a copy of the signed NOI to the operator of any MS4 receiving the discharge and to any secondary construction operator, and (2) list in the SWP3 the names and addresses of all MS4 operators receiving a copy;
- (e) all persons meeting the definition of "secondary operator" in Part I of this permit are hereby notified that they are regulated under this general permit, but are not required to submit an NOI, provided that a primary operator at the site has submitted an NOI, or is required to submit an NOI, and the secondary operator has provided notification to the operator(s) of the need to obtain coverage (with records of notification available upon request). Any secondary operator notified under this provision may alternatively submit an NOI under this general permit, may seek coverage under an alternative TPDES individual permit, or may seek coverage under an alternative TPDES general permit if available; and
- (f) all secondary operators must provide a copy of the signed and certified Secondary Operator construction site notice to the operator of any MS4 receiving the discharge prior to commencement of construction activities.

4. Waivers for Small Construction Activities:

Part II.G. describes how operators of certain small construction activities may obtain a waiver from coverage.

5. Effective Date of Coverage

- (a) Operators of small construction activities as described in either Part II.E.1. or II.E.2. above are authorized immediately following compliance with the applicable conditions of Part II.E.1. or II.E.2. Secondary operators of large construction activities as described in Part II.E.3. above are authorized immediately following compliance with the applicable conditions in Part II.E.3. For activities located in areas regulated by 30 TAC Chapter 213, related to the Edwards Aquifer, this authorization to discharge is separate from the requirements of the operator's responsibilities under that rule. Construction may not commence for sites regulated under 30 TAC Chapter 213 until all applicable requirements of that rule are met.
- (b) Primary operators of large construction activities as described in Part II.E.3. above are provisionally authorized seven (7) days from the date that a completed NOI is postmarked for delivery to the TCEQ, unless otherwise notified by the executive director. If electronic submission of the NOI is provided, and unless otherwise notified by the executive director, primary operators are authorized immediately following confirmation of receipt of the NOI by the TCEQ. Authorization is non-provisional when the executive director finds the NOI is administratively complete and an authorization number is issued for the activity. For activities located in areas regulated by 30 TAC Chapter 213, related to the Edwards Aquifer, this authorization to discharge is separate from the requirements of the operator's responsibilities under that rule. Construction may not commence for sites regulated under 30 TAC Chapter 213 until all applicable requirements of that rule are met.
- (c) Operators are not prohibited from submitting late NOIs or posting late notices to obtain authorization under this general permit. The TCEQ reserves the right to take appropriate enforcement actions for any unpermitted activities that may have occurred between the time construction commenced and authorization was obtained.

6. Notice of Change (NOC)

If relevant information provided in the NOI changes, an NOC must be submitted at least 14 days before the change occurs, if possible. Where 14-day advance notice is not possible, the operator must submit an NOC within 14 days of discovery of the change. If

the operator becomes aware that it failed to submit any relevant facts or submitted incorrect information in an NOI, the correct information must be provided to the executive director in an NOC within 14 days after discovery. The NOC shall be submitted on a form provided by the executive director, or by letter if an NOC form is not available. A copy of the NOC must also be provided to the operator of any MS4 receiving the discharge, and a list must be included in the SWP3 that includes the names and addresses of all MS4 operators receiving a copy.

Information that may be included on an NOC includes, but is not limited to, the following: the description of the construction project, an increase in the number of acres disturbed (for increases of one or more acres), or the operator name. A transfer of operational control from one operator to another, including a transfer of the ownership of a company, may not be included in an NOC.

A transfer of ownership of a company includes changes to the structure of a company, such as changing from a partnership to a corporation or changing corporation types, so that the filing number (or charter number) that is on record with the Texas Secretary of State must be changed.

An NOC is not required for notifying TCEQ of a decrease in the number of acres disturbed. This information must be included in the SWP3 and retained on site.

7. Signatory Requirement for NOI Forms, Notice of Termination (NOT) Forms, NOC Letters, and Construction Site Notices

NOI forms, NOT forms, NOC letters, and Construction Site Notices that require a signature must be signed according to 30 TAC § 305.44 (relating to Signatories for Applications).

8. Contents of the NOI

The NOI form shall require, at a minimum, the following information:

- (a) the TPDES CGP authorization number for existing authorizations under this general permit, where the operator submits an NOI to renew coverage within 90 days of the effective date of this general permit;
- (b) the name, address, and telephone number of the operator filing the NOI for permit coverage;
- (c) the name (or other identifier), address, county, and latitude/longitude of the construction project or site;
- (d) the number of acres that will be disturbed by the applicant;
- (e) confirmation that the project or site will not be located on Indian Country lands;
- (f) confirmation that a SWP3 has been developed in accordance with this general permit, that it will be implemented prior to construction, and that it is compliant with any applicable local sediment and erosion control plans; for multiple operators who prepare a shared SWP3, the confirmation for an operator may be limited to its obligations under the SWP3 provided all obligations are confirmed by at least one operator;
- (g) name of the receiving water(s);
- (h) the classified segment number for each classified segment that receives discharges from the regulated construction activity (if the discharge is not directly to a classified segment, then the classified segment number of the first classified segment that those discharges reach); and
- (i) the name of all surface waters receiving discharges from the regulated construction activity that are on the latest EPA-approved CWA § 303(d) List of impaired waters.

Section F. Terminating Coverage**1. Notice of Termination (NOT) Required**

Each operator that has submitted an NOI for authorization under this general permit must apply to terminate that authorization following the conditions described in this section of the general permit. Authorization must be terminated by submitting an NOT on a form supplied by the executive director. Authorization to discharge under this general permit terminates at midnight on the day the NOT is postmarked for delivery to the TCEQ. If electronic submission of the NOT is provided, authorization to discharge under this permit terminates immediately following confirmation of receipt of the NOT by the TCEQ. Compliance with the conditions and requirements of this permit is required until an NOT is submitted.

The NOT must be submitted to TCEQ, and a copy of the NOT provided to the operator of any MS4 receiving the discharge (with a list in the SWP3 of the names and addresses of all MS4 operators receiving a copy), within 30 days after any of the following conditions are met:

- (a) final stabilization has been achieved on all portions of the site that are the responsibility of the permittee;
- (b) a transfer of operational control has occurred (See Section II.F.4. below); or
- (c) the operator has obtained alternative authorization under an individual TPDES permit or alternative TPDES general permit.

2. Minimum Contents of the NOT

The NOT form shall require, at a minimum, the following information:

- (a) if authorization was granted following submission of an NOI, the permittee's site-specific TPDES authorization number for the construction site;
- (b) an indication of whether the construction activity is completed or if the permittee is simply no longer an operator at the site;
- (c) the name, address, and telephone number of the permittee submitting the NOT;
- (d) the name (or other identifier), address, county, and location (latitude/longitude) of the construction project or site; and
- (e) a signed certification that either all stormwater discharges requiring authorization under this general permit will no longer occur, or that the applicant is no longer the operator of the facility or construction site, and that all temporary structural erosion controls have either been removed, will be removed on a schedule defined in the SWP3, or have been transferred to a new operator if the new operator has applied for permit coverage. Erosion controls that are designed to remain in place for an indefinite period, such as mulches and fiber mats, are not required to be removed or scheduled for removal.

3. Termination of Coverage for Small Construction Sites and for Secondary Operators at Large Construction Sites

Each operator that has obtained automatic authorization and has not been required to submit an NOI must remove the site notice upon meeting any of the conditions listed below, complete the applicable portion of the site notice related to removal of the site notice, and submit a copy of the completed site notice to the operator of any MS4 receiving the discharge (or provide alternative notification as allowed by the MS4 operator, with documentation of such notification included in the SWP3), within 30 days of meeting any of the following conditions:

- (a) final stabilization has been achieved on all portions of the site that are the responsibility of the permittee;
- (b) a transfer of operational control has occurred (See Section II.F.4. below); or
- (c) the operator has obtained alternative authorization under an individual or general TPDES permit.

Authorization to discharge under this general permit terminates immediately upon removal of the applicable site notice. Compliance with the conditions and requirements of this permit is required until the site notice is removed.

4. Transfer of Operational Control

Coverage under this general permit is not transferable. A transfer of operational control includes changes to the structure of a company, such as changing from a partnership to a corporation, or changing to a different corporation type such that a different filing (or charter) number is established with the Texas Secretary of State.

When the primary operator of a large construction activity changes or operational control is transferred, the original operator must submit an NOT within ten (10) days prior to the date that responsibility for operations terminates, and the new operator must submit an NOI at least ten (10) days prior to the transfer of operational control, in accordance with condition (a) or (b) below. A copy of the NOT must be provided to the operator of any MS4 receiving the discharge in accordance with Section II.F.1. above.

Operators of regulated construction activities who are not required to submit an NOI must remove the original site notice, and the new operator must post the required site notice prior to the transfer of operational control, in accordance with condition (a) or (b) below. A copy of the completed site notice must be provided to the operator of any MS4 receiving the discharge, in accordance with Section II.F.3. above.

A transfer of operational control occurs when either of the following criteria is met:

- (a) Another operator has assumed control over all areas of the site that have not been finally stabilized; and all silt fences and other temporary erosion controls have either been removed, scheduled for removal as defined in the SWP₃, or transferred to a new operator, provided that the permitted operator has attempted to notify the new operator in writing of the requirement to obtain permit coverage. Record of this notification (or attempt at notification) shall be retained by the operator in accordance with Part VI of this permit. Erosion controls that are designed to remain in place for an indefinite period, such as mulches and fiber mats, are not required to be removed or scheduled for removal.
- (b) A homebuilder has purchased one or more lots from an operator who obtained coverage under this general permit for a common plan of development or sale. The homebuilder is considered a new operator and shall comply with the requirements listed above, including the development of a SWP₃ if necessary. Under these circumstances, the homebuilder is only responsible for compliance with the general permit requirements as they apply to lot(s) it has operational control over, and the original operator remains responsible for common controls or discharges, and must amend its SWP₃ to remove the lot(s) transferred to the homebuilder.

Section G. Waivers from Coverage

The executive director may waive the otherwise applicable requirements of this general permit for stormwater discharges from small construction activities under the terms and conditions described in this section.

1. Waiver Applicability and Coverage

Operators of small construction activities may apply for and receive a waiver from the requirements to obtain authorization under this general permit, where all of the following conditions are met. This waiver from coverage does not apply to non-stormwater discharges. The operator must insure that any non-stormwater discharges are either authorized under a separate permit or authorization, or are not considered to be a wastewater.

- (a) the calculated rainfall erosivity (R) factor for the entire period of the construction project is less than five (5);
- (b) the operator submits to the TCEQ a signed waiver certification form, supplied by the executive director, certifying that the construction activity will commence and be completed within a period when the value of the calculated R factor is less than five (5); and
- (c) the waiver certification form is postmarked for delivery to the TCEQ at least seven (7) days before construction activity begins or, if electronic filing is available, then any time following the receipt of written confirmation from TCEQ that a complete electronic application was submitted and acknowledged.

2. Steps to Obtaining a Waiver

The construction site operator may calculate the R factor to request a waiver using the following steps:

- (a) Estimate the construction start date and the construction end date. The construction end date is the date that final stabilization will be achieved.
- (b) Find the appropriate Erosivity Index (EI) zone in Appendix B of this permit.
- (c) Find the EI percentage for the project period by adding the results for each period of the project using the table provided in Appendix D of this permit, in EPA Fact Sheet 2.1, or in USDA Handbook 703, by subtracting the start value from the end value to find the percent EI for the site.
- (d) Refer to the Isoerodent Map (Appendix C of this permit) and interpolate the annual isoerodent value for the proposed construction location.
- (e) Multiply the percent value obtained in Step (c) above by the annual isoerodent value obtained in Step (d). This is the R factor for the proposed project. If the value is less than 5, then a waiver may be obtained. If the value is five (5) or more, then a waiver may not be obtained, and the operator must obtain coverage under Part II.E.2. of this permit.

Alternatively, the operator may calculate a site-specific R factor utilizing the following online calculator: <http://ei.tamu.edu/index.html>, or using another available resource.

The waiver certification form is not required to be posted at the small construction site.

3. Effective Date of Waiver

Operators of small construction activities are provisionally waived from the otherwise applicable requirements of this general permit seven (7) days from the date that a completed waiver certification form is postmarked for delivery to TCEQ, or immediately upon receiving confirmation of approval of an electronic submittal, if electronic form submittals are available.

4. Activities Extending Beyond the Waiver Period

If a construction activity extends beyond the approved waiver period due to circumstances beyond the control of the operator, the operator must either:

- (a) recalculate the R factor using the original start date and a new projected ending date, and if the R factor is still under five (5), submit a new waiver certification form at least two (2) days before the end of the original waiver period; or
- (b) obtain authorization under this general permit according to the requirements delineated in either Part II.E.2. or Part II.E.3. before the end of the approved waiver period.

Section H. Alternative TPDES Permit Coverage

1. Individual Permit Alternative

Any discharge eligible for coverage under this general permit may alternatively be authorized under an individual TPDES permit according to 30 TAC §305 (relating to Consolidated Permits). Applications for individual permit coverage should be submitted at least three hundred and thirty (330) days prior to commencement of construction activities to ensure timely authorization.

2. Individual Permit Required

The executive director may suspend an authorization or deny an NOI in accordance with the procedures set forth in 30 TAC §205 (relating to General Permits for Waste Discharges), including the requirement that the executive director provide written notice to the permittee. The executive director may require an operator of a construction site, otherwise eligible for authorization under this general permit, to apply for an individual TPDES permit in the following circumstances:

- (a) the conditions of an approved TMDL or TMDL I-Plan on the receiving water;
- (b) the activity being determined to cause a violation of water quality standards or being found to cause, or contribute to, the loss of a designated use of surface water in the state: and
- (c) any other consideration defined in 30 TAC Chapter 205 (relating to General Permits for Waste Discharges) including 30 TAC Chapter 205.4(c)(3)(D), which allows the commission to deny authorization under the general permit and require an individual permit if a discharger "has been determined by the executive director to have been out of compliance with any rule, order, or permit of the commission, including non-payment of fees assessed by the executive director."

Additionally, the executive director may cancel, revoke, or suspend authorization to discharge under this general permit based on a finding of historical and significant noncompliance with the provisions of this general permit, relating to 30 TAC §60.3 (Use of Compliance History). Denial of authorization to discharge under this general permit or suspension of a permittee's authorization under this general permit shall be done according to commission rules in 30 TAC Chapter 205 (relating to General Permits for Waste Discharges).

3. Alternative Discharge Authorization

Any discharge eligible for authorization under this general permit may alternatively be authorized under a separate general permit according to 30 TAC Chapter 205 (relating to General Permits for Waste Discharges), if applicable.

Section I. Permit Expiration

1. This general permit is effective for a term not to exceed five (5) years. All active discharge authorizations expire on the date provided on page one (1) of this permit. Following public notice and comment, as provided by 30 TAC §205.3 (relating to

Public Notice, Public Meetings, and Public Comment), the commission may amend, revoke, cancel, or renew this general permit.

2. If the executive director publishes a notice of the intent to renew or amend this general permit before the expiration date, the permit will remain in effect for existing, authorized discharges until the commission takes final action on the permit. Upon issuance of a renewed or amended permit, permittees may be required to submit an NOI within 90 days following the effective date of the renewed or amended permit, unless that permit provides for an alternative method for obtaining authorization.
3. If the commission does not propose to reissue this general permit within 90 days before the expiration date, permittees shall apply for authorization under an individual permit or an alternative general permit. If the application for an individual permit is submitted before the expiration date, authorization under this expiring general permit remains in effect until the issuance or denial of an individual permit. No new NOIs will be accepted nor new authorizations honored under the general permit after the expiration date.

Part III. Stormwater Pollution Prevention Plans (SWP3)

All regulated construction site operators shall prepare an SWP3, prior to submittal of an NOI, to address discharges authorized under Parts II.E.2. and II.E.3. of this general permit that will reach Waters of the U.S., including discharges to MS4s and privately owned separate storm sewer systems that drain to Waters of the U.S., to identify and address potential sources of pollution that are reasonably expected to affect the quality of discharges from the construction site, including off-site material storage areas, overburden and stockpiles of dirt, borrow areas, equipment staging areas, vehicle repair areas, fueling areas, etc., used solely by the permitted project. The SWP3 must describe the implementation of practices that will be used to minimize to the extent practicable the discharge of pollutants in stormwater associated with construction activity and non-stormwater discharges described in Part II.A.3., in compliance with the terms and conditions of this permit.

Individual operators at a site may develop separate SWP3s that cover only their portion of the project, provided reference is made to the other operators at the site. Where there is more than one SWP3 for a site, permittees must coordinate to ensure that BMPs and controls are consistent and do not negate or impair the effectiveness of each other. Regardless of whether a single comprehensive SWP3 is developed or separate SWP3s are developed for each operator, it is the responsibility of each operator to ensure compliance with the terms and conditions of this general permit in the areas of the construction site where that operator has control over construction plans and specifications or day-to-day operations.

Section A. Shared SWP3 Development

For more effective coordination of BMPs and opportunities for cost sharing, a cooperative effort by the different operators at a site is encouraged. Operators must independently obtain authorization, but may work together to prepare and implement a single, comprehensive SWP3 for the entire construction site.

1. The SWP3 must clearly list the name and, for large construction activities, the general permit authorization numbers, for each operator that participates in the shared SWP3. Until the TCEQ responds to receipt of the NOI with a general permit authorization number, the SWP3 must specify the date that the NOI was submitted to TCEQ by each operator. Each operator participating in the shared plan must also sign the SWP3.

2. The SWP3 must clearly indicate which operator is responsible for satisfying each shared requirement of the SWP3. If the responsibility for satisfying a requirement is not described in the plan, then each permittee is entirely responsible for meeting the requirement within the boundaries of the construction site where they perform construction activities. The SWP3 must clearly describe responsibilities for meeting each requirement in shared or common areas.
3. The SWP3 may provide that one operator is responsible for preparation of a SWP3 in compliance with the CGP, and another operator is responsible for implementation of the SWP3 at the project site.

Section B. Responsibilities of Operators

1. Secondary Operators and Primary Operators with Control Over Construction Plans and Specifications

All secondary operators and primary operators with control over construction plans and specifications shall:

- (a) ensure the project specifications allow or provide that adequate BMPs are developed to meet the requirements of Part III of this general permit;
- (b) ensure that the SWP3 indicates the areas of the project where they have control over project specifications, including the ability to make modifications in specifications;
- (c) ensure that all other operators affected by modifications in project specifications are notified in a timely manner so that those operators may modify their BMPs as necessary to remain compliant with the conditions of this general permit; and
- (d) ensure that the SWP3 for portions of the project where they are operators indicates the name and site-specific TPDES authorization number(s) for operators with the day-to-day operational control over those activities necessary to ensure compliance with the SWP3 and other permit conditions. If the party with day-to-day operational control has not been authorized or has abandoned the site, the person with control over project specifications is considered to be the responsible party until the authority is transferred to another party and the SWP3 is updated.

2. Primary Operators with Day-to-Day Operational Control

Primary operators with day-to-day operational control of those activities at a project that are necessary to ensure compliance with an SWP3 and other permit conditions must ensure that the SWP3 accomplishes the following requirements:

- (a) meets the requirements of this general permit for those portions of the project where they are operators;
- (b) identifies the parties responsible for implementation of BMPs described in the SWP3;
- (c) indicates areas of the project where they have operational control over day-to-day activities; and
- (d) includes, for areas where they have operational control over day-to-day activities, the name and site-specific TPDES authorization number of the parties with control over project specifications, including the ability to make modifications in specifications.

Section C. Deadlines for SWP3 Preparation, Implementation, and Compliance

The SWP3 must be prepared prior to obtaining authorization under this general permit, and implemented prior to commencing construction activities that result in soil

disturbance. The SWP3 must be prepared so that it provides for compliance with the terms and conditions of this general permit.

Section D. Plan Review and Making Plans Available

1. The SWP3 must be retained on-site at the construction site or, if the site is inactive or does not have an on-site location to store the plan, a notice must be posted describing the location of the SWP3. The SWP3 must be made readily available at the time of an on-site inspection to: the executive director; a federal, state, or local agency approving sediment and erosion plans, grading plans, or stormwater management plans; local government officials; and the operator of a municipal separate storm sewer receiving discharges from the site. If the SWP3 is retained off-site, then it shall be made available as soon as reasonably possible. In most instances, it is reasonable that the SWP3 shall be made available within 24 hours of the request.
2. A primary operator of a large construction activity must post the TCEQ site notice near the main entrance of the construction site. An operator of a small construction activity seeking authorization under this general permit and a secondary operator of a large construction activity must post the TCEQ site notice required in Part II.E.1., 2., or 3. of this general permit in order to obtain authorization. If the construction project is a linear construction project, such as a pipeline or highway, the notices must be placed in a publicly accessible location near where construction is actively underway. Notices for these linear sites may be relocated, as necessary, along the length of the project. The notices must be readily available for viewing by the general public; local, state, and federal authorities; and contain the following information:
 - (a) the site-specific TPDES authorization number for the project if assigned;
 - (b) the operator name, contact name, and contact phone number;
 - (c) a brief description of the project; and
 - (d) the location of the SWP3.
3. This permit does not provide the general public with any right to trespass on a construction site for any reason, including inspection of a site; nor does this permit require that permittees allow members of the general public access to a construction site.

Section E. Revisions and Updates to SWP3s

The permittee must revise or update the SWP3 whenever the following occurs:

1. a change in design, construction, operation, or maintenance that has a significant effect on the discharge of pollutants and that has not been previously addressed in the SWP3;
2. changing site conditions based on updated plans and specifications, new operators, new areas of responsibility, and changes in BMPs; or
3. results of inspections or investigations by site operators, operators of a municipal separate storm sewer system receiving the discharge, authorized TCEQ personnel, or a federal, state or local agency approving sediment and erosion plans indicate the SWP3 is proving ineffective in eliminating or significantly minimizing pollutants in discharges authorized under this general permit.

Section F. Contents of SWP3

The SWP3 must include, at a minimum, the information described in this section and must comply with the construction and development effluent guidelines in Part III, Section G of the general permit.

1. A site or project description, which includes the following information:
 - (a) a description of the nature of the construction activity;
 - (b) a list of potential pollutants and their sources;
 - (c) a description of the intended schedule or sequence of activities that will disturb soils for major portions of the site, including estimated start dates and duration of activities;
 - (d) the total number of acres of the entire property and the total number of acres where construction activities will occur, including off-site material storage areas, overburden and stockpiles of dirt, and borrow areas that are authorized under the permittee's NOI;
 - (e) data describing the soil or the quality of any discharge from the site;
 - (f) a map showing the general location of the site (e.g. a portion of a city or county map);
 - (g) a detailed site map (or maps) indicating the following:
 - (i) drainage patterns and approximate slopes anticipated after major grading activities;
 - (ii) areas where soil disturbance will occur;
 - (iii) locations of all controls and buffers, either planned or in place;
 - (iv) locations where temporary or permanent stabilization practices are expected to be used;
 - (v) locations of construction support activities, including off-site activities, that are authorized under the permittee's NOI, including material, waste, borrow, fill, or equipment or chemical storage areas;
 - (vi) surface waters (including wetlands) either at, adjacent, or in close proximity to the site, and also indicating those that are impaired waters;
 - (vii) locations where stormwater discharges from the site directly to a surface water body or a municipal separate storm sewer system;
 - (viii) vehicle wash areas; and
 - (ix) designated points on the site where vehicles will exit onto paved roads (for instance, this applies to construction transition from unstable dirt areas to exterior paved roads).

Where the amount of information required to be included on the map would result in a single map being difficult to read and interpret, the operator shall develop a series of maps that collectively include the required information.

- (h) the location and description of support activities authorized under the permittee's NOI, including asphalt plants, concrete plants, and other activities providing support to the construction site that is authorized under this general permit;
- (i) the name of receiving waters at or near the site that may be disturbed or that may receive discharges from disturbed areas of the project;
- (j) a copy of this TPDES general permit;
- (k) the NOI and acknowledgement certificate for primary operators of large construction sites, and the site notice for small construction sites and for secondary operators of large construction sites;
- (l) stormwater and allowable non-stormwater discharge locations, including storm drain inlets on site and in the immediate vicinity of the construction site; and

(m) locations of all pollutant-generating activities, such as paving operations; concrete, paint and stucco washout and water disposal; solid waste storage and disposal; and dewatering operations.

2. A description of the BMPs that will be used to minimize pollution in runoff.

The description must identify the general timing or sequence for implementation. At a minimum, the description must include the following components:

(a) General Requirements

- (i) Erosion and sediment controls must be designed to retain sediment on-site to the extent practicable with consideration for local topography, soil type, and rainfall.
- (ii) Control measures must be properly selected, installed, and maintained according to the manufacturer's or designer's specifications.
- (iii) Controls must be developed to minimize the offsite transport of litter, construction debris, and construction materials.

(b) Erosion Control and Stabilization Practices

The SWP3 must include a description of temporary and permanent erosion control and stabilization practices for the site, compliant with the requirements of Part III.G.1 and G.2 of this general permit, including a schedule of when the practices will be implemented. Site plans should ensure that existing vegetation is preserved where it is possible.

- (i) Erosion control and stabilization practices may include but are not limited to: establishment of temporary or permanent vegetation, mulching, geotextiles, sod stabilization, vegetative buffer strips, protection of existing trees and vegetation, slope texturing, temporary velocity dissipation devices, flow diversion mechanisms, and other similar measures.
- (ii) The following records must be maintained and either attached to or referenced in the SWP3, and made readily available upon request to the parties listed in Part III.D.1 of this general permit:
 - (A) the dates when major grading activities occur;
 - (B) the dates when construction activities temporarily or permanently cease on a portion of the site; and
 - (C) the dates when stabilization measures are initiated.
- (iii) Erosion control and stabilization measures must be initiated immediately in portions of the site where construction activities have temporarily ceased and will not resume for a period exceeding 14 calendar days. Stabilization measures that provide a protective cover must be initiated immediately in portions of the site where construction activities have permanently ceased. The term "immediately" is used to define the deadline for initiating stabilization measures. In the context of this requirement, "immediately" means as soon as practicable, but no later than the end of the next work day, following the day when the earth-disturbing activities have temporarily or permanently ceased. Except as provided in (A) through (D) below, these measures must be completed as soon as practicable, but no more than 14 calendar days after the initiation of soil stabilization measures:
 - (A) Where the immediate initiation of stabilization measures after construction activity temporarily or permanently ceased is precluded

by snow cover or frozen ground conditions, stabilization measures must be initiated as soon as practicable.

- (B) In arid areas, semi-arid areas, or drought-stricken areas where the immediate initiation of stabilization measures after construction activity has temporarily or permanently ceased or is precluded by arid conditions, erosion control and stabilization measures must be initiated as soon as practicable. Where vegetative controls are not feasible due to arid conditions, the operator shall immediately install, and within 14 calendar days of a temporary or permanent cessation of work in any portion of the site complete, non-vegetative erosion controls. If non-vegetative controls are not feasible, the operator shall install temporary sediment controls as required in Paragraph (C) below.
 - (C) In areas where temporary stabilization measures are infeasible, the operator may alternatively utilize temporary perimeter controls. The operator must document in the SWP3 the reason why stabilization measures are not feasible, and must demonstrate that the perimeter controls will retain sediment on site to the extent practicable. The operator must continue to inspect the BMPs at the frequency established in Section III.F.7.(a) for unstabilized sites.
 - (D) If the initiation or completion of vegetative stabilization is affected by circumstances beyond the control of the permittee, vegetative stabilization must be initiated or completed as soon as conditions or circumstances allow it on the site. The requirement to initiate stabilization is triggered as soon as it is known with reasonable certainty that work will be stopped for 14 or more additional calendar days.
- (iv) Final stabilization must be achieved prior to termination of permit coverage.
 - (v) TCEQ does not expect that temporary or permanent stabilization measures to be applied to areas that are intended to be left un-vegetated or un-stabilized following construction (e.g., dirt access roads, utility pole pads, areas being used for storage of vehicles, equipment, or materials).
- (c) Sediment Control Practices

The SWP3 must include a description of any sediment control practices used to remove eroded soils from stormwater runoff, including the general timing or sequence for implementation of controls.

- (i) Sites With Drainage Areas of Ten or More Acres

(A) Sedimentation Basin(s)

- (1) A sedimentation basin is required, where feasible, for a common drainage location that serves an area with ten (10) or more acres disturbed at one time. A sedimentation basin may be temporary or permanent, and must provide sufficient storage to contain a calculated volume of runoff from a 2-year, 24-hour storm from each disturbed acre drained. When calculating the volume of runoff from a 2-year, 24-hour storm event, it is not required to include the flows from offsite areas and flow from onsite areas that are either undisturbed or have already undergone permanent stabilization, if these flows are diverted around both the disturbed areas of the site and the sediment basin. Capacity calculations shall be included in the SWP3.

- (b) The SWP3 must include a description of construction and waste materials expected to be stored on-site and a description of controls to minimize pollutants from these materials.
 - (c) The SWP3 must include a description of potential pollutant sources from areas other than construction (such as stormwater discharges from dedicated asphalt plants and dedicated concrete batch plants), and a description of controls and measures that will be implemented at those sites to minimize pollutant discharges.
 - (d) Permittees shall place velocity dissipation devices at discharge locations and along the length of any outfall channel (i.e., runoff conveyance) to provide a non-erosive flow velocity from the structure to a water course, so that the natural physical and biological characteristics and functions are maintained and protected.
 - (e) Permittees shall design and utilize appropriate controls to minimize the offsite transport of suspended sediments and other pollutants if it is necessary to pump or channel standing water from the site.
 - (f) Permittees shall ensure that all other required controls and BMPs comply with all of the requirements of Part III.G of this general permit.
5. Documentation of Compliance with Approved State and Local Plans
- (a) Permittees must ensure that the SWP3 is consistent with requirements specified in applicable sediment and erosion site plans or site permits, or stormwater management site plans or site permits approved by federal, state, or local officials.
 - (b) SWP3s must be updated as necessary to remain consistent with any changes applicable to protecting surface water resources in sediment erosion site plans or site permits, or stormwater management site plans or site permits approved by state or local official for which the permittee receives written notice.
 - (c) If the permittee is required to prepare a separate management plan, including but not limited to a WPAP or Contributing Zone Plan in accordance with 30 TAC Chapter 213 (related to the Edwards Aquifer), then a copy of that plan must be either included in the SWP3 or made readily available upon request to authorized personnel of the TCEQ. The permittee shall maintain a copy of the approval letter for the plan in its SWP3.
6. Maintenance Requirements
- (a) All protective measures identified in the SWP3 must be maintained in effective operating condition. If, through inspections or other means, the permittee determines that BMPs are not operating effectively, then the permittee shall perform maintenance as necessary to maintain the continued effectiveness of stormwater controls, and prior to the next rain event if feasible. If maintenance prior to the next anticipated storm event is impracticable, the reason shall be documented in the SWP3 and maintenance must be scheduled and accomplished as soon as practicable. Erosion and sediment controls that have been intentionally disabled, run-over, removed, or otherwise rendered ineffective must be replaced or corrected immediately upon discovery.
 - (b) If periodic inspections or other information indicates a control has been used incorrectly, is performing inadequately, or is damaged, then the operator shall replace or modify the control as soon as practicable after making the discovery.
 - (c) Sediment must be removed from sediment traps and sedimentation ponds no later than the time that design capacity has been reduced by 50%. For perimeter

controls such as silt fences, berms, etc., the trapped sediment must be removed before it reaches 50% of the above-ground height.

- (d) If sediment escapes the site, accumulations must be removed at a frequency that minimizes off-site impacts, and prior to the next rain event, if feasible. If the permittee does not own or operate the off-site conveyance, then the permittee shall work with the owner or operator of the property to remove the sediment.

7. Inspections of Controls

- (a) Personnel provided by the permittee must inspect disturbed areas of the construction site that have not been finally stabilized, areas used for storage of materials that are exposed to precipitation, discharge locations, and structural controls for evidence of, or the potential for, pollutants entering the drainage system. Personnel conducting these inspections must be knowledgeable of this general permit, familiar with the construction site, and knowledgeable of the SWP3 for the site. Sediment and erosion control measures identified in the SWP3 must be inspected to ensure that they are operating correctly. Locations where vehicles enter or exit the site must be inspected for evidence of off-site sediment tracking. Inspections must be conducted at least once every 14 calendar days and within 24 hours of the end of a storm event of 0.5 inches or greater.

Where sites have been finally or temporarily stabilized or where runoff is unlikely due to winter conditions (e.g. site is covered with snow, ice, or frozen ground exists), inspections must be conducted at least once every month. In arid, semi-arid, or drought-stricken areas, inspections must be conducted at least once every month and within 24 hours after the end of a storm event of 0.5 inches or greater. The SWP3 must also contain a record of the total rainfall measured, as well as the approximate beginning and ending dates of winter or drought conditions resulting in monthly frequency of inspections.

As an alternative to the above-described inspection schedule of once every 14 calendar days and within 24 hours of a storm event of 0.5 inches or greater, the SWP3 may be developed to require that these inspections will occur at least once every seven (7) calendar days. If this alternative schedule is developed, then the inspection must occur regardless of whether or not there has been a rainfall event since the previous inspection.

The inspections may occur on either schedule provided that the SWP3 reflects the current schedule and that any changes to the schedule are conducted in accordance with the following provisions: the schedule may be changed a maximum of one time each month, the schedule change must be implemented at the beginning of a calendar month, and the reason for the schedule change must be documented in the SWP3 (e.g., end of "dry" season and beginning of "wet" season).

- (b) Utility line installation, pipeline construction, and other examples of long, narrow, linear construction activities may provide inspection personnel with limited access to the areas described in Part III.F.7.(a) above. Inspection of these areas could require that vehicles compromise temporarily or even permanently stabilized areas, cause additional disturbance of soils, and increase the potential for erosion. In these circumstances, controls must be inspected at least once every 14 calendar days and within 24 hours of the end of a storm event of 0.5 inches or greater, but representative inspections may be performed. For representative inspections, personnel must inspect controls along the construction site for 0.25 mile above and below each access point where a roadway, undisturbed right-of-way, or other similar feature intersects the construction site and allows access to the areas described in Part III.F.7.(a)

above. The conditions of the controls along each inspected 0.25 mile portion may be considered as representative of the condition of controls along that reach extending from the end of the 0.25 mile portion to either the end of the next 0.25 mile inspected portion, or to the end of the project, whichever occurs first.

As an alternative to the above-described inspection schedule of once every 14 calendar days and within 24 hours of a storm event of 0.5 inches or greater, the SWP3 may be developed to require that these inspections will occur at least once every seven (7) calendar days. If this alternative schedule is developed, the inspection must occur regardless of whether or not there has been a rainfall event since the previous inspection. The inspections may occur on either schedule provided that the SWP3 reflects the current schedule and that any changes to the schedule are conducted in accordance with the following provisions: the schedule may be changed a maximum of one time each month, the schedule change must be implemented at the beginning of a calendar month, and the reason for the schedule change must be documented in the SWP3 (e.g., end of "dry" season and beginning of "wet" season).

- (c) In the event of flooding or other uncontrollable situations which prohibit access to the inspection sites, inspections must be conducted as soon as access is practicable.
- (d) The SWP3 must be modified based on the results of inspections, as necessary, to better control pollutants in runoff. Revisions to the SWP3 must be completed within seven (7) calendar days following the inspection. If existing BMPs are modified or if additional BMPs are necessary, an implementation schedule must be described in the SWP3 and wherever possible those changes implemented before the next storm event. If implementation before the next anticipated storm event is impracticable, these changes must be implemented as soon as practicable.
- (e) A report summarizing the scope of the inspection, the date(s) of the inspection, and major observations relating to the implementation of the SWP3 must be made and retained as part of the SWP3. Major observations should include: The locations of discharges of sediment or other pollutants from the site; locations of BMPs that need to be maintained; locations of BMPs that failed to operate as designed or proved inadequate for a particular location; and locations where additional BMPs are needed.

Actions taken as a result of inspections must be described within, and retained as a part of, the SWP3. Reports must identify any incidents of non-compliance. Where a report does not identify any incidents of non-compliance, the report must contain a certification that the facility or site is in compliance with the SWP3 and this permit. The report must be signed by the person and in the manner required by 30 TAC §305.128 (relating to Signatories to Reports).

The names and qualifications of personnel making the inspections for the permittee may be documented once in the SWP3 rather than being included in each report.

- 8. The SWP3 must identify and ensure the implementation of appropriate pollution prevention measures for all eligible non-stormwater components of the discharge, as listed in Part II.A.3. of this permit.
- 9. The SWP3 must include the information required in Part III.B. of this general permit.
- 10. The SWP3 must include pollution prevention procedures that comply with Part III.G.4 of this general permit.

Section G. Erosion and Sediment Control Requirements Applicable to All Sites

Except as provided in 40 CFR §§125.30-125.32, any discharge regulated under this general permit, with the exception of sites that obtained waivers based on low rainfall erosivity, must achieve, at a minimum, the following effluent limitations representing the degree of effluent reduction attainable by application of the best practicable control technology currently available (BPT).

1. *Erosion and sediment controls.* Design, install, and maintain effective erosion controls and sediment controls to minimize the discharge of pollutants. At a minimum, such controls must be designed, installed, and maintained to:
 - (a) Control stormwater volume and velocity within the site to minimize soil erosion;
 - (b) If any stormwater flow will be channelized at the site, stormwater controls must be designed to control both peak flowrates and total stormwater volume to minimize erosion at outlets and to minimize downstream channel and streambank erosion;
 - (c) Minimize the amount of soil exposed during construction activity;
 - (d) Minimize the disturbance of steep slopes;
 - (e) Minimize sediment discharges from the site. The design, installation, and maintenance of erosion and sediment controls must address factors such as the amount, frequency, intensity and duration of precipitation, the nature of resulting stormwater runoff, and soil characteristics, including the range of soil particle sizes expected to be present on the site;
 - (f) If earth disturbance activities are located in close proximity to a surface water, provide and maintain appropriate natural buffers if feasible and as necessary, around surface waters, depending on site-specific topography, sensitivity, and proximity to water bodies. Direct stormwater to vegetated areas to increase sediment removal and maximize stormwater infiltration. If providing buffers is infeasible, the permittee shall document the reason that natural buffers are not feasible, and shall implement additional erosion and sediment controls to reduce sediment load;
 - (g) Preserve native topsoil at the site, unless infeasible; and
 - (h) Minimize soil compaction in post-construction pervious areas. In areas of the construction site where final vegetative stabilization will occur or where infiltration practices will be installed, either:
 - (1) restrict vehicle and equipment use to avoid soil compaction; or
 - (2) prior to seeding or planting areas of exposed soil that have been compacted, use techniques that condition the soils to support vegetative growth, if necessary and feasible;
 - (i) TCEQ does not consider stormwater control features (e.g., stormwater conveyance channels, storm drain inlets, sediment basins) to constitute "surface waters" for the purposes of triggering the buffer requirement in Part III.G.(f) above.
2. *Soil stabilization.* Stabilization of disturbed areas must, at a minimum, be initiated immediately whenever any clearing, grading, excavating, or other earth disturbing activities have permanently ceased on any portion of the site, or temporarily ceased on any portion of the site and will not resume for a period exceeding 14 calendar days. In the context of this requirement, "immediately" means as soon as practicable, but no later than the end of the next work day, following the day when the earth-disturbing activities have temporarily or permanently ceased. Temporary

stabilization must be completed no more than 14 calendar days after initiation of soil stabilization measures, and final stabilization must be achieved prior to termination of permit coverage. In arid, semi-arid, and drought-stricken areas where initiating vegetative stabilization measures immediately is infeasible, alternative non-vegetative stabilization measures must be employed as soon as practicable. Refer to Part III.F.2.(b) for complete erosion control and stabilization practice requirements.

3. *Dewatering.* Discharges from dewatering activities, including discharges from dewatering of trenches and excavations, are prohibited, unless managed by appropriate controls.
4. *Pollution prevention measures.* Design, install, implement, and maintain effective pollution prevention measures to minimize the discharge of pollutants. At a minimum, such measures must be designed, installed, implemented, and maintained to:
 - (a) Minimize the discharge of pollutants from equipment and vehicle washing, wheel wash water, and other wash waters. Wash waters must be treated in a sediment basin or alternative control that provides equivalent or better treatment prior to discharge;
 - (b) Minimize the exposure of building materials, building products, construction wastes, trash, landscape materials, fertilizers, pesticides, herbicides, detergents, sanitary waste, and other materials present on the site to precipitation and to stormwater; and
 - (c) Minimize the discharge of pollutants from spills and leaks, and implement chemical spill and leak prevention and response procedures.
5. *Prohibited discharges.* The following discharges are prohibited:
 - (a) Wastewater from wash out of concrete trucks, unless managed by an appropriate control (see Part V of the general permit);
 - (b) Wastewater from wash out and cleanout of stucco, paint, form release oils, curing compounds and other construction materials;
 - (c) Fuels, oils, or other pollutants used in vehicle and equipment operation and maintenance; and
 - (d) Soaps or solvents used in vehicle and equipment washing.
6. *Surface outlets.* When discharging from basins and impoundments, utilize outlet structures that withdraw water from the surface, unless infeasible.

Part IV. Stormwater Runoff from Concrete Batch Plants

Discharges of stormwater runoff from concrete batch plants at regulated construction sites may be authorized under the provisions of this general permit provided that the following requirements are met for concrete batch plant(s) authorized under this permit. If discharges of stormwater runoff from concrete batch plants are not covered under this general permit, then discharges must be authorized under an alternative general permit or individual permit. This permit does not authorize the discharge or land disposal of any wastewater from concrete batch plants at regulated construction sites. Authorization for these wastes must be obtained under an individual permit or an alternative general permit.

Section A. Benchmark Sampling Requirements

1. Operators of concrete batch plants authorized under this general permit shall sample the stormwater runoff from the concrete batch plants according to the requirements

of this section of this general permit, and must conduct evaluations on the effectiveness of the SWP₃ based on the following benchmark monitoring values:

Table 1. Benchmark Parameters

Benchmark Parameter	Benchmark Value	Sampling Frequency	Sample Type
Oil and Grease	15 mg/L	1/quarter (*1) (*2)	Grab (*3)
Total Suspended Solids	100 mg/L	1/quarter (*1) (*2)	Grab (*3)
pH	6.0 – 9.0 Standard Units	1/quarter (*1) (*2)	Grab (*3)
Total Iron	1.3 mg/L	1/quarter (*1) (*2)	Grab (*3)

(*1) When discharge occurs. Sampling is required within the first 30 minutes of discharge. If it is not practicable to take the sample, or to complete the sampling, within the first 30 minutes, sampling must be completed within the first hour of discharge. If sampling is not completed within the first 30 minutes of discharge, the reason must be documented and attached to all required reports and records of the sampling activity.

(*2) Sampling must be conducted at least once during each of the following periods. The first sample must be collected during the first full quarter that a stormwater discharge occurs from a concrete batch plant authorized under this general permit.

January through March

April through June

July through September

October through December

For projects lasting less than one full quarter, a minimum of one sample shall be collected, provided that a stormwater discharge occurred at least once following submission of the NOI or following the date that automatic authorization was obtained under Section II.E.2., and prior to terminating coverage.

(*3) A grab sample shall be collected from the stormwater discharge resulting from a storm event that is at least 0.1 inches of measured precipitation that occurs at least 72 hours from the previously measurable storm event. The sample shall be collected downstream of the concrete batch plant, and where the discharge exits any BMPs utilized to handle the runoff from the batch plant, prior to commingling with any other water authorized under this general permit.

2. The permittee must compare the results of sample analyses to the benchmark values above, and must include this comparison in the overall assessment of the SWP₃'s effectiveness. Analytical results that exceed a benchmark value are not a violation of this permit, as these values are not numeric effluent limitations. Results of analyses are indicators that modifications of the SWP₃ should be assessed and may be necessary to protect water quality. The operator must investigate the cause for each exceedance and must document the results of this investigation in the SWP₃ by the end of the quarter following the sampling event.

The operator's investigation must identify the following:

- (a) any additional potential sources of pollution, such as spills that might have occurred,
- (b) necessary revisions to good housekeeping measures that are part of the SWP3,
- (c) additional BMPs, including a schedule to install or implement the BMPs, and
- (d) other parts of the SWP3 that may require revisions in order to meet the goal of the benchmark values.

Background concentrations of specific pollutants may also be considered during the investigation. If the operator is able to relate the cause of the exceedance to background concentrations, then subsequent exceedances of benchmark values for that pollutant may be resolved by referencing earlier findings in the SWP3. Background concentrations may be identified by laboratory analyses of samples of stormwater runoff to the permitted facility, by laboratory analyses of samples of stormwater runoff from adjacent non-industrial areas, or by identifying the pollutant is a naturally occurring material in soils at the site.

Section B. Best Management Practices (BMPs) and SWP3 Requirements

Minimum SWP3 Requirements – The following are required in addition to other SWP3 requirements listed in this general permit (including, but not limited to Part III.F.7. of this permit):

1. **Description of Potential Pollutant Sources** - The SWP3 must provide a description of potential sources (activities and materials) that may reasonably be expected to affect the quality of stormwater discharges associated with concrete batch plants authorized under this permit. The SWP3 must describe practices that that will be used to reduce the pollutants in these discharges to assure compliance with this general permit, including the protection of water quality, and must ensure the implementation of these practices.

The following must be developed, at a minimum, in support of developing this description:

- (a) **Drainage** – The site map must include the following information:
 - (1) the location of all outfalls for stormwater discharges associated with concrete batch plants that are authorized under this permit;
 - (2) a depiction of the drainage area and the direction of flow to the outfall(s);
 - (3) structural controls used within the drainage area(s);
 - (4) the locations of the following areas associated with concrete batch plants that are exposed to precipitation: vehicle and equipment maintenance activities (including fueling, repair, and storage areas for vehicles and equipment scheduled for maintenance); areas used for the treatment, storage, or disposal of wastes; liquid storage tanks; material processing and storage areas; and loading and unloading areas; and
 - (5) the locations of the following: any bag house or other dust control device(s); recycle/sedimentation pond, clarifier or other device used for the treatment of facility wastewater (including the areas that drain to the treatment device); areas with significant materials; and areas where major spills or leaks have occurred.
- (b) **Inventory of Exposed Materials** – A list of materials handled at the concrete batch plant that may be exposed to stormwater and that have a potential to

- affect the quality of stormwater discharges associated with concrete batch plants that are authorized under this general permit.
- (c) **Spills and Leaks** - A list of significant spills and leaks of toxic or hazardous pollutants that occurred in areas exposed to stormwater and that drain to stormwater outfalls associated with concrete batch plants authorized under this general permit must be developed, maintained, and updated as needed.
 - (d) **Sampling Data** - A summary of existing stormwater discharge sampling data must be maintained, if available.
2. **Measures and Controls** - The SWP3 must include a description of management controls to regulate pollutants identified in the SWP3's "Description of Potential Pollutant Sources" from Part IV.B.1.(a) of this permit, and a schedule for implementation of the measures and controls. This must include, at a minimum:
- (a) **Good Housekeeping** - Good housekeeping measures must be developed and implemented in the area(s) associated with concrete batch plants.
 - (1) Operators must prevent or minimize the discharge of spilled cement, aggregate (including sand or gravel), settled dust, or other significant materials from paved portions of the site that are exposed to stormwater. Measures used to minimize the presence of these materials may include regular sweeping or other equivalent practices. These practices must be conducted at a frequency that is determined based on consideration of the amount of industrial activity occurring in the area and frequency of precipitation, and shall occur at least once per week when cement or aggregate is being handled or otherwise processed in the area.
 - (2) Operators must prevent the exposure of fine granular solids, such as cement, to stormwater. Where practicable, these materials must be stored in enclosed silos, hoppers or buildings, in covered areas, or under covering.
 - (b) **Spill Prevention and Response Procedures** - Areas where potential spills that can contribute pollutants to stormwater runoff, and the drainage areas from these locations, must be identified in the SWP3. Where appropriate, the SWP3 must specify material handling procedures, storage requirements, and use of equipment. Procedures for cleaning up spills must be identified in the SWP3 and made available to the appropriate personnel.
 - (c) **Inspections** - Qualified facility personnel (i.e., a person or persons with knowledge of this general permit, the concrete batch plant, and the SWP3 related to the concrete batch plant(s) for the site) must be identified to inspect designated equipment and areas of the facility specified in the SWP3. The inspection frequency must be specified in the SWP3 based upon a consideration of the level of concrete production at the facility, but must be a minimum of once per month while the facility is in operation. The inspection must take place while the facility is in operation and must, at a minimum, include all areas that are exposed to stormwater at the site, including material handling areas, above ground storage tanks, hoppers or silos, dust collection/containment systems, truck wash down and equipment cleaning areas. Follow-up procedures must be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections must be maintained and be made readily available for inspection upon request.
 - (d) **Employee Training** - An employee training program must be developed to educate personnel responsible for implementing any component of the SWP3, or personnel otherwise responsible for stormwater pollution prevention, with the provisions of the SWP3. The frequency of training must be documented in

- the SWP3, and at a minimum, must consist of one training prior to the initiation of operation of the concrete batch plant.
- (e) Record Keeping and Internal Reporting Procedures - A description of spills and similar incidents, plus additional information that is obtained regarding the quality and quantity of stormwater discharges, must be included in the SWP3. Inspection and maintenance activities must be documented and records of those inspection and maintenance activities must be incorporated in the SWP3.
 - (f) Management of Runoff - The SWP3 shall contain a narrative consideration for reducing the volume of runoff from concrete batch plants by diverting runoff or otherwise managing runoff, including use of infiltration, detention ponds, retention ponds, or reusing of runoff.
3. Comprehensive Compliance Evaluation – At least once per year, one or more qualified personnel (i.e., a person or persons with knowledge of this general permit, the concrete batch plant, and the SWP3 related to the concrete batch plant(s) for the site) shall conduct a compliance evaluation of the plant. The evaluation must include the following.
- (a) Visual examination of all areas draining stormwater associated with regulated concrete batch plants for evidence of, or the potential for, pollutants entering the drainage system. These include but are not limited to: cleaning areas, material handling areas, above ground storage tanks, hoppers or silos, dust collection/containment systems, and truck wash down and equipment cleaning areas. Measures implemented to reduce pollutants in runoff (including structural controls and implementation of management practices) must be evaluated to determine if they are effective and if they are implemented in accordance with the terms of this permit and with the permittee's SWP3. The operator shall conduct a visual inspection of equipment needed to implement the SWP3, such as spill response equipment.
 - (b) Based on the results of the evaluation, the following must be revised as appropriate within two weeks of the evaluation: the description of potential pollutant sources identified in the SWP3 (as required in Part IV.B.1., "Description of Potential Pollutant Sources"); and pollution prevention measures and controls identified in the SWP3 (as required in Part IV.B.2., "Measures and Controls"). The revisions may include a schedule for implementing the necessary changes.
 - (c) The permittee shall prepare and include in the SWP3 a report summarizing the scope of the evaluation, the personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the SWP3, and actions taken in response to the findings of the evaluation. The report must identify any incidents of noncompliance. Where the report does not identify incidences of noncompliance, the report must contain a statement that the evaluation did not identify any incidence(s), and the report must be signed according to 30 TAC §305.128, relating to Signatories to Reports.
 - (d) The Comprehensive Compliance Evaluation may substitute for one of the required inspections delineated in Part IV.B.2.(c) of this general permit.

Section C. Prohibition of Wastewater Discharges

Wastewater discharges associated with concrete production including wastewater disposal by land application are not authorized under this general permit. These wastewater discharges must be authorized under an alternative TCEQ water quality permit or otherwise disposed of in an authorized manner. Discharges of concrete truck wash out at construction sites may be authorized if conducted in accordance with the requirements of Part V of this general permit.

Part V. Concrete Truck Wash Out Requirements

This general permit authorizes the wash out of concrete trucks at construction sites regulated under Sections II.E.1., 2., and 3. of this general permit, provided the following requirements are met. Authorization is limited to the land disposal of wash out water from concrete trucks. Any other direct discharge of concrete production waste water must be authorized under a separate TCEQ general permit or individual permit.

1. Direct discharge of concrete truck wash out water to surface water in the state, including discharge to storm sewers, is prohibited by this general permit.
2. Concrete truck wash out water shall be discharged to areas at the construction site where structural controls have been established to prevent direct discharge to surface waters, or to areas that have a minimal slope that allow infiltration and filtering of wash out water to prevent direct discharge to surface waters. Structural controls may consist of temporary berms, temporary shallow pits, temporary storage tanks with slow rate release, or other reasonable measures to prevent runoff from the construction site.
3. Wash out of concrete trucks during rainfall events shall be minimized. The direct discharge of concrete truck wash out water is prohibited at all times, and the operator shall insure that its BMPs are sufficient to prevent the discharge of concrete truck wash out as the result of rainfall or stormwater runoff.
4. The discharge of wash out water must not cause or contribute to groundwater contamination.
5. If a SWP3 is required to be implemented, the SWP3 shall include concrete wash out areas on the associated site map.

Part VI. Retention of Records

The permittee must retain the following records for a minimum period of three (3) years from the date that a NOT is submitted as required by Part II.E.3. For activities in which an NOT is not required, records shall be retained for a minimum period of three (3) years from the date that the operator terminates coverage under Section II.F.3. of this permit. Records include:

1. A copy of the SWP3;
2. All reports and actions required by this permit, including a copy of the construction site notice;
3. All data used to complete the NOI, if an NOI is required for coverage under this general permit; and
4. All records of submittal of forms submitted to the operator of any MS4 receiving the discharge and to the secondary operator of a large construction site, if applicable.

Part VII. Standard Permit Conditions

1. The permittee has a duty to comply with all permit conditions. Failure to comply with any permit condition is a violation of the permit and statutes under which it was issued, and is grounds for enforcement action, for terminating, revoking, or denying coverage under this general permit, or for requiring a discharger to apply for and obtain an individual TPDES permit.
2. Authorization under this general permit may be suspended or revoked for cause. Filing a notice of planned changes or anticipated non-compliance by the permittee does not stay any permit condition. The permittee must furnish to the executive director, upon request and within a reasonable time, any information necessary for the executive director to determine whether cause exists for revoking, suspending, or

terminating authorization under this permit. Additionally, the permittee must provide to the executive director, upon request, copies of all records that the permittee is required to maintain as a condition of this general permit.

3. It is not a defense for a discharger in an enforcement action that it would have been necessary to halt or reduce the permitted activity to maintain compliance with the permit conditions.
4. Inspection and entry shall be allowed under TWC Chapters 26-28, Texas Health and Safety Code §§361.032-361.033 and 361.037, and 40 CFR §122.41(i). The statement in TWC §26.014 that commission entry of a facility shall occur according to an establishment's rules and regulations concerning safety, internal security, and fire protection is not grounds for denial or restriction of entry to any part of the facility or site, but merely describes the commission's duty to observe appropriate rules and regulations during an inspection.
5. The discharger is subject to administrative, civil, and criminal penalties, as applicable, under TWC Chapter 7 for violations including but not limited to the following:
 - (a) negligently or knowingly violating the federal CWA §§301, 302, 306, 307, 308, 318, or 405, or any condition or limitation implementing any sections in a permit issued under CWA §402, or any requirement imposed in a pretreatment program approved under CWA §§402(a)(3) or 402(b)(8);
 - (b) knowingly making any false statement, representation, or certification in any record or other document submitted or required to be maintained under a permit, including monitoring reports or reports of compliance or noncompliance; and
 - (c) knowingly violating §303 of the federal CWA, and placing another person in imminent danger of death or serious bodily injury.
6. All reports and other information requested by the executive director must be signed by the person and in the manner required by 30 TAC §305.128 (relating to Signatories to Reports).
7. Authorization under this general permit does not convey property or water rights of any sort and does not grant any exclusive privilege.
8. The permittee shall take all reasonable steps to minimize or prevent any discharge in violation of this permit that has a reasonable likelihood of adversely affecting human health or the environment.
9. The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems which are installed by a permittee only when the operation is necessary to achieve compliance with the conditions of the permit.
10. The permittee shall comply with the reporting requirements in 40 CFR §122.41(l), as applicable.

Part VIII. Fees

1. A fee of must be submitted along with the NOI:
 - (a) \$325 if submitting a paper NOI, or
 - (b) \$225 if submitting an NOI electronically.

2. Fees are due upon submission of the NOI. An NOI will not be declared administratively complete unless the associated fee has been paid in full.
3. No separate annual fees will be assessed for this general permit. The Water Quality Annual Fee has been incorporated into the NOI fees as described above.

Appendix A: Automatic Authorization

Periods of Low Erosion Potential by County – Eligible Date Ranges


Andrews: Nov. 15 - Apr. 30	Ector: Nov. 15 - Apr. 30
Archer: Dec. 15 - Feb. 14	Edwards: Dec. 15 - Feb. 14
Armstrong: Nov. 15 - Apr. 30	El Paso: Jan. 1 - Jul. 14, or May 15 - Jul. 31, or Jun. 1 - Aug. 14, or Jun. 15 - Sept. 14, or Jul. 1 - Oct. 14, or Jul. 15 - Oct. 31, or Aug. 1 - Apr. 30, or Aug. 15 - May 14, or Sept. 1 - May 30, or Oct. 1 - Jun. 14, or Nov. 1 - Jun. 30, or Nov. 15 - Jul. 14
Bailey: Nov. 1 - Apr. 30, or Nov. 15 - May 14	Fisher: Dec. 15 - Feb. 14
Baylor: Dec. 15 - Feb. 14	Floyd: Nov. 15 - Apr. 30
Borden: Nov. 15 - Apr. 30	Foard: Dec. 15 - Feb. 14
Brewster: Nov. 15 - Apr. 30	Gaines: Nov. 15 - Apr. 30
Briscoe: Nov. 15 - Apr. 30	Garza: Nov. 15 - Apr. 30
Brown: Dec. 15 - Feb. 14	Glasscock: Nov. 15 - Apr. 30
Callahan: Dec. 15 - Feb. 14	Hale: Nov. 15 - Apr. 30
Carson: Nov. 15 - Apr. 30	Hall: Feb. 1 - Mar. 30
Castro: Nov. 15 - Apr. 30	Hansford: Nov. 15 - Apr. 30
Childress: Dec. 15 - Feb. 14	Hardeman: Dec. 15 - Feb. 14
Cochran: Nov. 1 - Apr. 30, or Nov. 15 - May 14	Hartley: Nov. 15 - Apr. 30
Coke: Dec. 15 - Feb. 14	Haskell: Dec. 15 - Feb. 14
Coleman: Dec. 15 - Feb. 14	Hockley: Nov. 1 - Apr. 14, or Nov. 15 - Apr. 30
Collingsworth: Jan. 1 - Mar. 30, or Dec. 1 - Feb. 28	Howard: Nov. 15 - Apr. 30
Concho: Dec. 15 - Feb. 14	Hudspeth: Nov. 1 - May 14
Cottle: Dec. 15 - Feb. 14	Hutchinson: Nov. 15 - Apr. 30
Crane: Nov. 15 - Apr. 30	Irion: Dec. 15 - Feb. 14
Crockett: Nov. 15 - Jan. 14, or Feb. 1 - Mar. 30	Jeff Davis: Nov. 1 - Apr. 30 or Nov. 15 - May 14
Crosby: Nov. 15 - Apr. 30	Jones: Dec. 15 - Feb. 14
Culberson: Nov. 1 - May 14	Kent: Nov. 15 - Jan. 14 or Feb. 1 - Mar. 30
Dallam: Nov. 1 - Apr. 14, or Nov. 15 - Apr. 30	Kerr: Dec. 15 - Feb. 14
Dawson: Nov. 15 - Apr. 30	Kimble: Dec. 15 - Feb. 14
Deaf Smith: Nov. 15 - Apr. 30	King: Dec. 15 - Feb. 14
Dickens: Nov. 15 - Jan. 14, or Feb. 1 - Mar. 30	Kinney: Dec. 15 - Feb. 14
Dimmit: Dec. 15 - Feb. 14	Knox: Dec. 15 - Feb. 14
Donley: Jan. 1 - Mar. 30, or Dec. 1 - Feb. 28	Lamb: Nov. 1 - Apr. 14, or Nov. 15 - Apr. 30
Eastland: Dec. 15 - Feb. 14	

Construction General Permit

TPDES General Permit TXR150000


Loving: Nov. 1 - Apr. 30, or Nov. 15 - May 14
Lubbock: Nov. 15 - Apr. 30
Lynn: Nov. 15 - Apr. 30
Martin: Nov. 15 - Apr. 30
Mason: Dec. 15 - Feb. 14
Maverick: Dec. 15 - Feb. 14
McCulloch: Dec. 15 - Feb. 14
Menard: Dec. 15 - Feb. 14
Midland: Nov. 15 - Apr. 30
Mitchell: Nov. 15 - Apr. 30
Moore: Nov. 15 - Apr. 30
Motley: Nov. 15 - Jan. 14, or Feb. 1 - Mar. 30
Nolan: Dec. 15 - Feb. 14
Oldham: Nov. 15 - Apr. 30
Parmer: Nov. 1 - Apr. 14, or Nov. 15 - Apr. 30
Pecos: Nov. 15 - Apr. 30
Potter: Nov. 15 - Apr. 30
Presidio: Nov. 1 - Apr. 30, or Nov. 15 - May 14
Randall: Nov. 15 - Apr. 30
Reagan: Nov. 15 - Apr. 30
Real: Dec. 15 - Feb. 14
Reeves: Nov. 1 - Apr. 30, or Nov. 15 - May 14
Runnels: Dec. 15 - Feb. 14
Schleicher: Dec. 15 - Feb. 14
Scurry: Nov. 15 - Apr. 30
Shackelford: Dec. 15 - Feb. 14
Sherman: Nov. 15 - Apr. 30
Stephens: Dec. 15 - Feb. 14
Sterling: Nov. 15 - Apr. 30
Stonewall: Dec. 15 - Feb. 14
Sutton: Dec. 15 - Feb. 14
Swisher: Nov. 15 - Apr. 30
Taylor: Dec. 15 - Feb. 14
Terrell: Nov. 15 - Apr. 30
Terry: Nov. 15 - Apr. 30
Throckmorton: Dec. 15 - Feb. 14
Tom Green: Dec. 15 - Feb. 14
Upton: Nov. 15 - Apr. 30
Uvalde: Dec. 15 - Feb. 14
Val Verde: Nov. 15 - Jan. 14, or Feb. 1 - Mar. 30
Ward: Nov. 1 - Apr. 14, or Nov. 15 - Apr. 30
Wichita: Dec. 15 - Feb. 14
Wilbarger: Dec. 15 - Feb. 14
Winkler: Nov. 1 - Apr. 30, or Nov. 15 - May 14
Yoakum: Nov. 1 - Apr. 30, or Nov. 15 - May 14
Young: Dec. 15 - Feb. 14
Wheeler: Jan. 1 - Mar. 30, or Dec. 1 - Feb. 28
Zavala: Dec. 15 - Feb. 14

Appendix B: Erosivity Index (EI) Zones in Texas

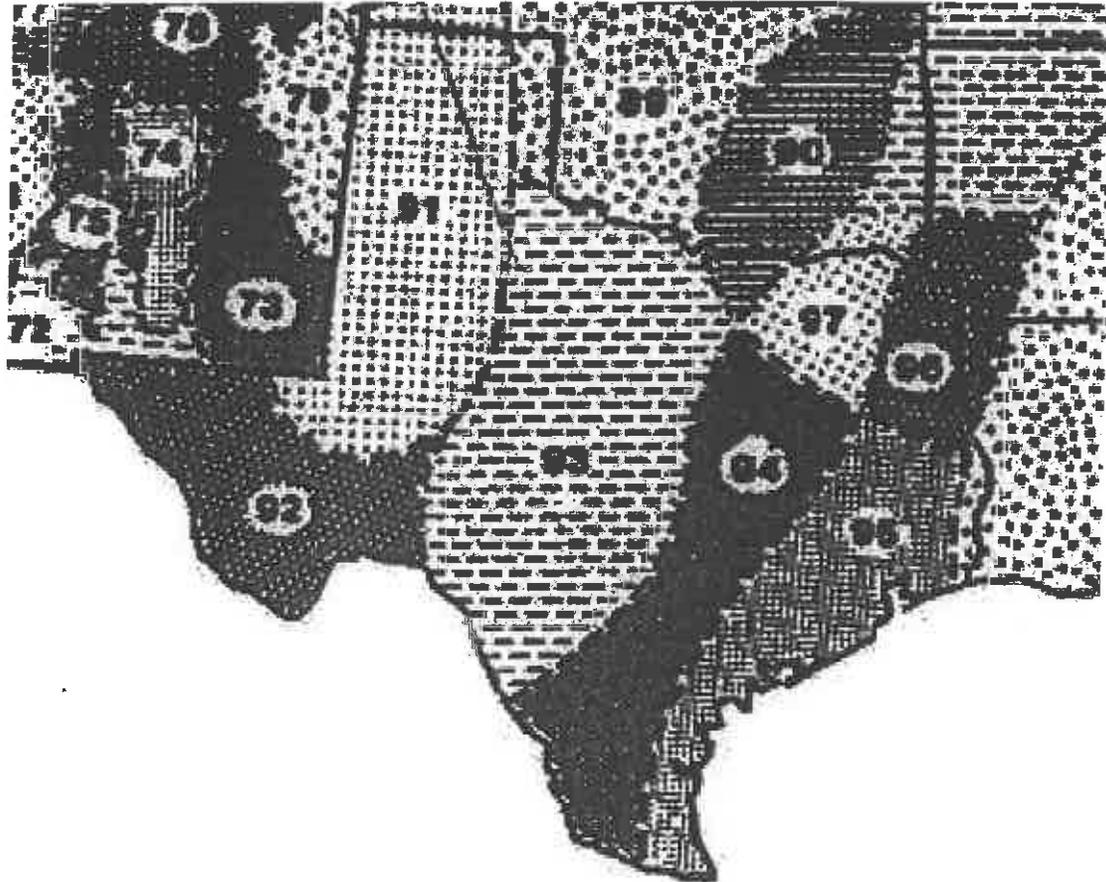

Adapted from Chapter 2 of USDA Agriculture Handbook 703: "Predicting Soil Erosion by Water: A Guide to Conservation Planning With the Revised Universal Soil Loss Equation (RUSLE)," U.S. Department of Agriculture, Agricultural Research Service

Appendix C: Isoerodent Map

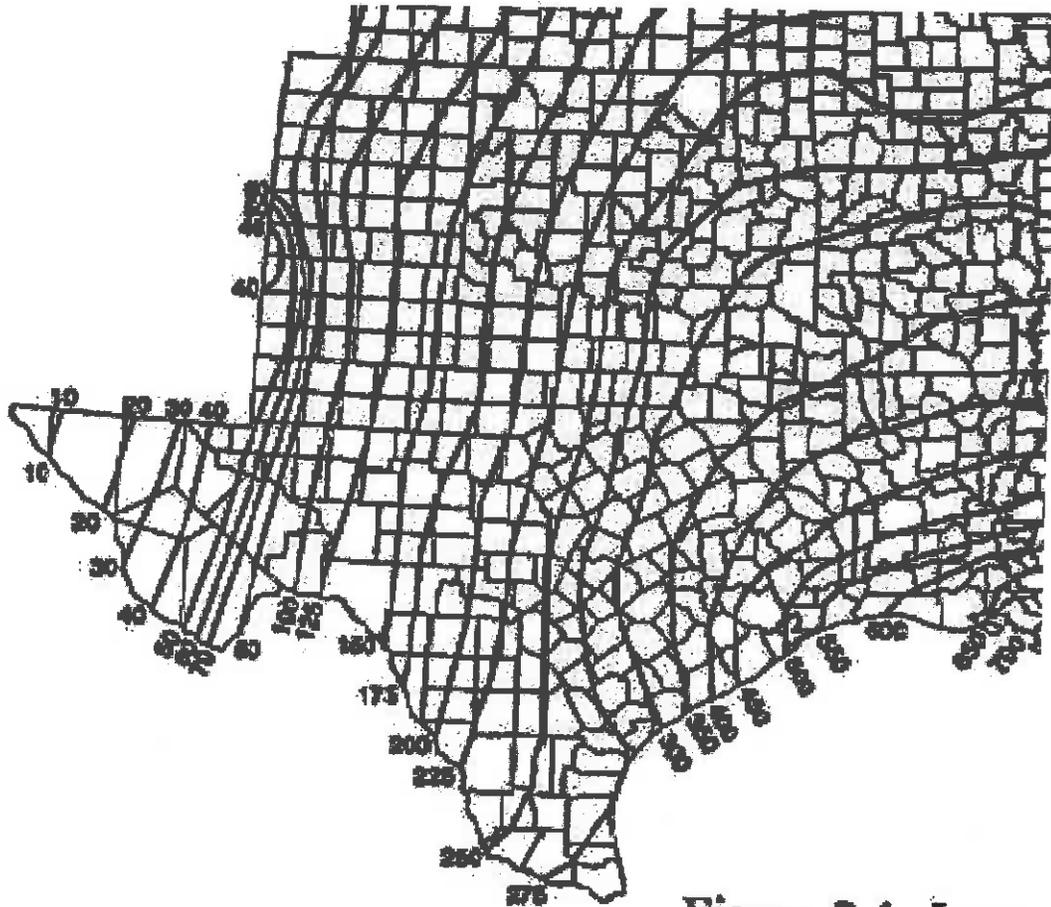

Adapted from Chapter 2 of USDA Agriculture Handbook 703: "Predicting Soil Erosion by Water: A Guide to Conservation Planning With the Revised Universal Soil Loss Equation (RUSLE)," U.S. Department of Agriculture, Agricultural Research Service

Appendix D: Erosivity Indices for EI Zones in Texas

Periods:

EI #	1/1	1/16	1/31	2/15	3/1	3/16	3/31	4/15	4/30	5/15	5/30	6/14	6/29	7/14	7/29	8/13	8/28	9/12	9/27	10/12	10/27	11/11	11/26	12/11	12/31
89	0	1	1	2	3	4	7	2	8	27	38	48	55	62	69	76	83	90	94	97	98	99	100	100	100
90	0	1	2	3	4	6	8	13	21	29	37	46	54	60	65	69	74	81	87	92	95	97	98	99	100
91	0	0	0	0	1	1	1	2	6	16	29	39	46	53	60	67	74	81	88	95	99	99	100	100	100
92	0	0	0	0	1	1	1	2	6	16	29	39	46	53	60	67	74	81	88	95	99	99	100	100	100
93	0	1	1	2	3	4	6	8	13	25	40	49	56	62	67	72	76	80	85	91	97	98	99	99	100
94	0	1	2	4	6	8	10	15	21	29	38	47	53	57	61	65	70	76	83	88	91	94	96	98	100
95	0	1	3	5	7	9	11	14	18	27	35	41	46	51	57	62	68	73	79	84	89	93	96	98	100
96	0	2	4	6	9	12	17	23	30	37	43	49	54	58	62	66	70	74	78	82	86	90	94	97	100
97	0	1	3	5	7	10	14	20	28	37	48	56	61	64	68	72	77	81	86	89	92	95	98	99	100
106	0	3	6	9	13	17	21	27	33	38	44	49	55	61	67	71	75	78	81	84	86	90	94	97	100

* Each period begins on the date listed in the table above and lasts until the day before the following period. The final period begins on December 11 and ends on December 31.

Table adapted from Chapter 2 of USDA Agriculture Handbook 703: "Predicting Soil Erosion by Water: A Guide to Conservation Planning With the Revised Universal Soil Loss Equation (RUSLE)," U.S. Department of Agriculture, Agricultural Research Service



SMALL CONSTRUCTION SITE NOTICE

FOR THE
Texas Commission on Environmental Quality (TCEQ)
Stormwater Program
TPDES GENERAL PERMIT TXR150000

The following information is posted in compliance with **Part II.E.2.** of the TCEQ General Permit Number TXR150000 for discharges of stormwater runoff from small construction sites. Additional information regarding the TCEQ stormwater permit program may be found on the internet at:

http://www.tceq.state.tx.us/nav/permits/wq_construction.html

Operator Name:	
Contact Name and Phone Number:	
Project Description: <i>Physical address or description of the site's location, estimated start date and projected end date, or date that disturbed soils will be stabilized</i>	
Location of Stormwater Pollution Prevention Plan:	

For Small Construction Activities Authorized Under Part II.E.2. (Obtaining Authorization to Discharge) the following certification must be completed:

I _____ (Typed or Printed Name Person Completing This Certification) certify under penalty of law that I have read and understand the eligibility requirements for claiming an authorization under Part II.E.2. of TPDES General Permit TXR150000 and agree to comply with the terms of this permit. A stormwater pollution prevention plan has been developed and will be implemented prior to construction, according to permit requirements. A copy of this signed notice is supplied to the operator of the MS4 if discharges enter an MS4. I am aware there are significant penalties for providing false information or for conducting unauthorized discharges, including the possibility of fine and imprisonment for knowing violations.

Signature and Title _____ Date _____

_____ Date Notice Removed

_____ MS4 operator notified per Part II.F.3.



LARGE CONSTRUCTION SITE NOTICE

FOR THE
Texas Commission on Environmental Quality (TCEQ)
Stormwater Program
TPDES GENERAL PERMIT TXR150000

“PRIMARY OPERATOR” NOTICE

This notice applies to construction sites operating under Part II.E.3. of the TPDES General Permit Number TXR150000 for discharges of stormwater runoff from construction sites equal to or greater than five acres, including the larger common plan of development. The information on this notice is required in Part III.D.2. of the general permit. Additional information regarding the TCEQ stormwater permit program may be found on the internet at:

http://www.tceq.state.tx.us/nav/permits/wq_construction.html

Site-Specific TPDES Authorization Number:	
Operator Name:	
Contact Name and Phone Number:	
Project Description: <i>Physical address or description of the site's location, and estimated start date and projected end date, or date that disturbed soils will be stabilized.</i>	
Location of Stormwater Pollution Prevention Plan:	



LARGE CONSTRUCTION SITE NOTICE

FOR THE
Texas Commission on Environmental Quality (TCEQ)
Stormwater Program
TPDES GENERAL PERMIT TXR150000
“SECONDARY OPERATOR” NOTICE

This notice applies to secondary operators of construction sites operating under Part II.E.3. of the TPDES General Permit Number TXR150000 for discharges of stormwater runoff from construction sites equal to or greater than five acres, including the larger common plan of development. The information on this notice is required in Part III.D.2. of the general permit. Additional information regarding the TCEQ stormwater permit program may be found on the internet at:

http://www.tceq.state.tx.us/nav/permits/wq_construction.html

Site-Specific TPDES Authorization Number:	
Operator Name:	
Contact Name and Phone Number:	
Project Description: <i>Physical address or description of the site's location, and estimated start date and projected end date, or date that disturbed soils will be stabilized.</i>	
Location of Stormwater Pollution Prevention Plan (SWP3):	

For Large Construction Activities Authorized Under Part II.E.3. (Obtaining Authorization to Discharge) the following certification must be completed:

I _____ (Typed or Printed Name Person Completing This Certification) certify under penalty of law that I have read and understand the eligibility requirements for claiming an authorization under Part II.E.3. of TPDES General Permit TXR150000 and agree to comply with the terms of this permit. A stormwater pollution prevention plan has been developed and will be implemented prior to construction, according to permit requirements. A copy of this signed notice is supplied to the operator of the MS4 if discharges enter an MS4. I am aware there are significant penalties for providing false information or for conducting unauthorized discharges, including the possibility of fine and imprisonment for knowing violations.

Signature and Title _____ Date _____

_____ Date Notice Removed
 _____ MS4 operator notified per Part II.F.3.

ORDINANCE NO. 2599

AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF KATY, TEXAS, AMENDING THE CITY OF KATY ZONING ORDINANCE NO. 621; ADDING A NEW SECTION 14 MASTER PLANNED COMMUNITY DISTRICT (MPC); AMENDING SECTIONS 4.209, 4.210 AND 4.211 OF ARTICLE 4.200 "OIL AND GAS WELL" OF THE CITY OF KATY CODE OF ORDINANCES; REPEALING SECTION 11.1005 "LOT SIZE CONDITIONS" AND AMENDING SECTION 11.1003 CONDITIONS TO CREATION OF ARTICLE 11.100 "MUNICIPAL UTILITY DISTRICTS" OF THE CITY OF KATY CODE OF ORDINANCES; REPEALING ALL ORDINANCES AND PARTS OF ORDINANCES IN CONFLICT HEREWITH; PROVIDING FOR SEVERABILITY AND PROVIDING FOR A PENALTY.

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF KATY, TEXAS:

I.

That the City of Katy's Zoning Ordinance No. 621 is hereby amended by adding a new Section 14 Master Planned Community District (MPC) as set forth below:

SECTION 14: MASTER PLANNED COMMUNITY DISTRICT (MPC)

The purpose of the Master Planned Community District, hereinafter referred to as MPC, is to encourage the unified design of large primarily residential communities consisting of eight hundred (800) acres or more a portion of which may be located outside the City in accordance with an approved comprehensive development plan. This district provides for greater flexibility in lot sizes, street widths circulation and overall design and layout of the area than provided by other districts.

14.1 Uses Permitted.

14.1-1 Dwellings, one family.

14.1-2 Customary home occupations ordinarily carried on in a home that are not detrimental or injurious to adjoining property by reason of vibration, noise, odor, dust, smoke, gas or unsightly appearance. These may include dressmaking, millinery, washing, ironing, the office of a physician, dentist, surgeon, architect, lawyer, engineer, musician, or artist, provided that such uses are located in the dwelling used by such a person as his or her private residence, and provided that no assistant not a member of the family residing on the premises is employed. Said incidental use shall never be permitted as a principal use but only as a secondary use when indispensable necessary to the enjoyment of the premises and cannot involve the conduct of retail business. Customary home occupations shall not include barbershops, beauty shops, carpenter shops, electrician shops, plumbing shops, radio shops, tin shops, auto repairing, furniture repairing, or other similar uses. No use shall be permitted which is noxious or offensive by reason of vibration, noise, odor, dust, smoke, gas or unsightly appearance.

14.1-3 Public parks and playgrounds, including public recreation or service buildings within such parks.

14.1-4 Churches.

14.1-5 Schools (private, elementary, high, college and universities).

14.1-6 Public recreation buildings, community buildings, theater groups.

14.1-7 Libraries, museums, art galleries.

14.1-8 Child care, adult care, memory care, and nursing home facilities.

14.1-9 Fire stations, police stations, public administrative offices.

14.1-10 Municipal surface or underground or overhead water storage, water wells, and pumping stations.

14.3 Development of Master Planned Community (MPC).

14.3-1 A MPC may be developed in accordance with the Master Planned Community Development Standards adopted by the Katy City Council. A copy of the Master Planned Community Development Standards will be available in the City Secretary's office.

14.3-2 A MPC must comply with all applicable development standards set forth in the Master Planned Community Development Standards adopted by the Katy City Council.

14.3-3 A MPC must comply with all other City of Katy Ordinance requirements not in conflict with the provisions set forth in 14.3-1 and 14.3-2 above.

14.3-4 A copy of the Master Planned Community Development Standards is attached to this ordinance and incorporated herein as though each and every word were set forth in this ordinance.

14.4 Application.

14.4-1 An application for a MPC shall be made to the City Planning and Zoning Commission in the same manner that an application for any amendment to the Zoning Ordinance is made and shall be processed according to the procedure in Section 23

of the City of Katy's Zoning Ordinance. As in the instance of subdivision platting, a pre-planning conference is required as set out in Code of Ordinances Section 9.201 preparatory to the filing of the application for a MPC. The City Council, after recommendation by the City Planning and Zoning Commission and after public hearing and proper notices to all parties affected, may authorize the creation of a MPC on sites for a community of eight hundred (800) acres or more a portion of which may be located outside the City.

14.5 Development Schedule and Plan

14.5-1 An application for a MPC shall be filed with the City Planning and Zoning Commission and be accompanied by a development schedule indicating the approximate date on which construction is expected to begin and a rate of anticipated development to completion. The development schedule if adopted and approved by the City Council shall become part of the development plan and may be updated on an annual basis.

14.5-2 The building inspector shall report annually to the City Planning and Zoning Commission, the actual development accomplished in the MPC as compared with the development schedule.

14.5-3 The City Planning and Zoning Commission, if in its opinion, the owner or owners of property are failing or have failed to meet the approved schedule, may, with City Council approval, initiate proceedings under Section 23 of the City of Katy's Zoning Ordinance to amend the Zoning Map or the MPC by removing all or part of the MPC from the Zoning District Map and placing the area involved in another appropriate zoning district. The property, or a portion of the property, may not be

rezoned or placed in another zoning category if the actual development of the property meets or exceeds the rate of anticipated development submitted by the developer pursuant to Section 14.5-1. Upon the recommendation of the City Planning and Zoning Commission and good cause shown by the owner and developer, the City Council may also extend the development schedule or adopt such new development schedules as may be indicated by the facts and conditions of the case.

14.5-4 An application for a MPC shall include and be accompanied by a Development Plan which shall become a part of the amending ordinance and shall be referenced on the Zoning District Map. Changes in the Development Plan shall be considered the same as changes in the Zoning District Map and must be approved by City Council. However, changes of detail which do not alter the basic relationship of the proposed development to adjacent property and which do not alter the uses permitted or increase the density, floor area ratio, height or coverage of the site, or which do not decrease the off-street parking ratio, or reduce the yards provided at the boundary of the site, as indicated on the approved development plan, may be authorized by the City Planning and Zoning Commission. Also, the platting or replatting of lots in accordance with the Master Planned Community Development Standards shall not be considered an amendment to the City of Katy Zoning Ordinance and may be processed in accordance with the City of Katy's Subdivision Ordinance. The platting or replatting of lots in accordance with the Master Planned Community Development Standards will be considered an amendment to the Master Plan Community Development Plan. Any applicant may appeal the decision of the City Planning and Zoning Commission to the City Council for review and decision as to whether an amendment to the MPC Ordinance shall be required.

14.5-5 The Development Plan shall include the following:

14.5-5.1 A plat or land plan, prepared by a registered surveyor or engineer, showing proposed major through fares, residential pods; any area proposed for dedication or reserved as parks or parkways; playgrounds; fire station sites; police station sites; water well sites; school sites; and the points of ingress and egress from existing public streets and defining boundaries and topography with a contour interval of not less than two (2) feet, or spot grades where the relief is limited.

14.5-5.2 A statement on the plat or land plan that all residences will be constructed in accordance with the residential construction material standards set forth in the Master Planned Community Development Standards adopted by the Katy City Council

14.5-5.3 Where multiple types of land use are proposed, a land use plan delineating the specific areas to be devoted to various uses shall be required.

14.5-5.4 Where building complexes, except for single family residences, are proposed, a site plan showing the location of each building and the minimum distance between buildings, and between buildings and property line, street line and/or alley line shall be submitted. For buildings more than one (1) story in height, except single family residences, elevations and/or prospective drawings may be required in order that the relationship of the buildings to adjacent property, open spaces and to other features of the development plan may be determined. Such drawings need only indicate the heights, number of floors, and exposures for access, light and air.

14.5-5.5 Where off-street loading is required, a plan indicating the arrangement and provisions shall be submitted, except for single family residences. Such a plan may be presented as a ratio of off-street parking and off-street loading area to building area when accompanied by a typical example indicating the feasibility of the arrangement proposed and when the areas where the example would be applied are dimensioned on the drawing of the entire site. Any special traffic regulation facilities proposed or required to assure the safe function of the circulation plan shall also be shown.

14.5-5.6 A designation of the maximum building coverage of the site shall be indicated upon the land site, except for single family residences.

14.5-5.7 Screening and landscaping plans shall be required, except for single family residences, where such treatment is essential to the proper arrangement of the development in relation to adjacent property. Such plan shall, when required, include screening walls, ornamental planting, playgrounds, wooded areas to be retained, lawn and gardens, if such are determined to be necessary by the City Planning and Zoning Commission.

14.5-5.8 Any or all of the required features may be incorporated on a single drawing if such drawing is clear and capable of evaluation by the City Planning and Zoning Commission and interpretation by the Building Inspector.

14.5-5.9 Every MPC approved under the provisions of this ordinance shall be considered as an amendment to the Zoning Ordinance as applicable to the property involved. In carrying out the development of a MPC, the development conditions of the

development schedule, if required, shall be complied with. Such conditions as are specified for the development of a MPC shall not be construed as conditions precedent to the approval of the zoning amendment, but shall be construed as conditions precedent to the granting of a certificate of occupancy and compliance.

II.

That subsection (a) (16) of Section 11.1003 "Conditions to Creation" of Article 11.1000 "Municipal Utility Districts" is hereby amended as follows:

ADDITIONS—DELETIONS

ARTICLE 11.1000 MUNICIPAL UTILITY DISTRICTS

Sec. 11.1003 Conditions to Creation

(a) The following conditions shall apply to every MUD within the city:

(16) no bonds or notes of the MUD shall be issued or sold unless not less than twenty (20) days prior to publication of notice of sale, the MUD provides the city with a copy of its proposed bond order, preliminary official statement, bid form and notice of sale and the following criteria are met.

The MUD shall not issue bonds unless the following conditions have been satisfied:

(A) The MUD shall not issue any bonds unless the purpose for which the proceeds of such bonds may be used is limited to one or more of the following and no others:

(i) Designing, purchasing and/or constructing or otherwise acquiring:

(aa) Waterworks facilities,

(bb) Wastewater facilities, or

(cc) Storm water drainage facilities,

(dd) Roads, or

(ee) Parks and Recreation facilities;

(ii) Purchasing or constructing or otherwise acquiring interests in real property, equipment, buildings, plants or structures necessary or incidental to the operation of waterworks facilities, wastewater facilities, or storm water drainage facilities;

(iii) Costs of issuance of the bonds (including but not limited to legal fees, financial advisory fees, administrative and organizational fees and expenses and costs of operations during construction, bond discount, capitalized interest, developer interest, creation costs, and contingencies relative to facilities not yet under contract);

(iv) Any other purpose authorized by law and approved by the City Council.

III.

That Sections 4.209, 4.210 and 4.211 of Article 4.200 Oil and Gas Wells of the City of Katy's Code of Ordinances is amended as follows:

ADDITIONS DELETIONS

Sec. 4.209 Drilling Near Structures

(a) In each case of drilling or redrilling, the distance from any well hole to any occupied structure shall be a minimum of six hundred feet (600'), unless permittee obtains written consent from the owners of said occupied structure and furnishes said written consent to the code enforcement administrator prior to issuance of said permit, but in no event shall a well be drilled closer than four hundred feet (400') to a structure. No well shall be drilled within one thousand feet (1,000') of the property line of any school in the Katy Independent School District or any hospital, convalescent home or nursing home whether such school, hospital, convalescent home or nursing home is located within or outside the City of Katy.

(b) It is hereby declared a nuisance for any person to conduct any drilling operation or to construct any storage tank or tanks within one thousand feet (1,000') of the property line of any school of the Katy Independent School District or any hospital, convalescent home or nursing home located either within or outside the city limits of Katy.

(c) Section 4.209(a) does not apply in Master Planned Communities.

Sec. 4.210 Storage Near Structures

In each case the distance from any storage tank or tanks in conjunction with any well to any occupied structure shall be a minimum of four hundred feet (400'), unless the distance requirements of Section 4.209 are reduced to four hundred feet (400') in which case the minimum shall be two hundred feet (200'). This section does not apply in Master Planned Communities.

Sec. 4.211 Drilling and Storage Near Public Ways

In each case the distance from the center of a well hole drilled under a permit issued under this article and from all storage tanks installed after the effective date of this article to the nearest traveled public or private street right-of-way shall be a minimum of two hundred feet (200'). This section does not apply in Master Planned Communities.

IV.

In the event any clause phrase, provision, sentence, or part of this Ordinance or the application of the same to any person or circumstances shall for any reason be adjudged invalid or held unconstitutional by a court of competent jurisdiction, it shall not affect, impair, or invalidate this Ordinance as a whole or any part or provision hereof other than the part declared to be invalid or unconstitutional; and the City Council of the City of Katy, Texas, declares that it would have passed each and every part of the same notwithstanding the omission of any such part thus declared to be invalid or unconstitutional, whether there be one or more parts.

V.

All ordinances or parts of ordinances inconsistent or in conflict herewith are, to the extent of such inconsistency or conflict, hereby repealed.

VI.

Any person who shall intentionally, knowingly, recklessly, or with criminal negligence, violate any provision of this Ordinance shall be deemed guilty of a misdemeanor and, upon conviction, shall be fined in accordance with the applicable penalty provided for in Section 1.106 of the City of Katy Code of Ordinances. Each day of violation shall constitute a separate offense.

VII.

The City Secretary is authorized to publish a summary or the caption of this Ordinance as required by law.

PASSED AND APPROVED this the 11th day of November, 2013.

CITY OF KATY, TEXAS

Fabrizio Hughes
Fabrizio Hughes, Mayor

ATTEST:

Melissa A. Bunch
Melissa A. Bunch, City Secretary

APPROVED:

Art Fertile
Art Fertile, City Attorney

MASTER PLANNED COMMUNITY DEVELOPMENT STANDARDS

AMENDMENT TO MASTER PLANNED COMMUNITY DISTRICT

ORDINANCE NO. 2668

AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF KATY, TEXAS, AMENDING THE CITY OF KATY ZONING ORDINANCE NO. 621; AMENDING THE MASTER PLAN DEVELOPMENT STANDARDS OF THE MASTER PLANNED COMMUNITY DISTRICT (MPC) BY AMENDING REQUIREMENTS IN SEVERAL SECTIONS INCLUDING SIDE YARD INTERIOR SETBACKS; HEIGHT OF BUILDINGS; EXTERIOR MATERIALS/MASONRY REQUIREMENT; GARAGES; PORCHES; AND ROOFS; REPEALING ALL ORDINANCES AND PARTS OF ORDINANCES IN CONFLICT HEREWITH; PROVIDING FOR SEVERABILITY AND PROVIDING FOR A PENALTY NOT TO EXCEED \$2,000 A DAY FOR EACH VIOLATION.

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF KATY, TEXAS:

I.

That the City of Katy's Zoning Ordinance No. 621 is hereby amended by amending the Master Plan Development Standards as set forth below:

MASTER PLANNED COMMUNITY DESIGN STANDARDS

ADDITIONS DELETIONS

SINGLE FAMILY STANDARDS

3. Building Setbacks

b. Side Yard Setbacks (Interior)

- 4) An interior side yard setback of zero (0) feet shall be permitted provided that all dwelling units maintain a minimum wall to wall separation of ten (10) feet. ~~No portion of a building may cross a property line.~~ No roof eaves may extend across a property line not more than twenty-four (24) inches. A maintenance easement will be required on all adjacent zero lot lines. Gutters shall not be directed toward the adjacent property.

SINGLE FAMILY LOT STANDARDS

4. Building Height

Buildings shall not exceed ~~thirty-five (35)~~ forty-five (45) feet in height and shall not exceed two-and-one-half (2-1/2) stories.

6. Side Entry Garages

On zero lot line properties side entry garages may encroach 10 feet into the front yard setback.

ARCHITECTURAL STANDARDS

3. Exterior Materials/Masonry Requirements

c. The number of primary materials on the exterior shall be limited to three (3), not including roof shingles. The following materials may be used:

- Brick
- Stone Stucco
- Cultures Stone
- Stone
- Fiber Cement Siding (earth tone colors and horizontal application only)
- Cedar or Redwood (Property stained or preserved and rot resistant)Brick
- Stone Stucco
- Cultures Stone
- Stone
- Fiber Cement Siding (earth tone colors and horizontal application only)
- Cedar or Redwood (Property stained or preserved and rot resistant)
- LP Smartside or equal material as determined by the building official

6. Garages

- b. Garage facades that face the street when a side-entry garage is used shall incorporate design elements, including windows, to blend the garage into the house design. The use of metal sectional doors is recommended due to the climate. ~~Wood garage doors are prohibited.~~ Wood garage doors should be from top quality Western Red Cedar, Mahogany, Douglas Fir, Cypress, or wood veneer. All wood garage doors should be treated to resist moisture, rot and termites. All doors must be built on 24 gauge steel sections, using heavy commercial grade hardware and back foam insulation.

7. Porches

- a. Porches are an important element because they contribute to the enjoyment of the outdoors by providing shade and shelter. They lend ~~shadow~~ shade and depth to exterior walls and present a human-scale element to the street. Porches shall be ~~enclosed by stucco arcades or colonnades~~ and be roofed with the same materials as the remainder of the home.

10. Roofs

- a. All roofs shall use simple pitched-roof forms ranging in slope from 3:12 to ~~6:12~~ 14:12. A flat roof or mansard roof shall be prohibited unless such a roof is a secondary roof form on the structure. For all roofs, both vertical and horizontal articulation is encouraged.
- b. Concrete tile, ~~or~~ clay tile, asphalt shingles, or other Class A-type roofing materials of a similar appearance shall be used on all sloped roofs. Several styles and colors of roofing materials should be offered and should

be interspersed throughout a development. Any area of a roof that uses a flat-roof design shall incorporate a parapet wall or cornice element on all sides of the area. Wood shingle and wood shake ~~and asphalt shingle~~ roof surfaces are not allowed.

II.

In the event any clause phrase, provision, sentence, or part of this Ordinance or the application of the same to any person or circumstances shall for any reason be adjudged invalid or held unconstitutional by a court of competent jurisdiction, it shall not affect, impair, or invalidate this Ordinance as a whole or any part or provision hereof other than the part declared to be invalid or unconstitutional; and the City Council of the City of Katy, Texas, declares that it would have passed each and every part of the same notwithstanding the omission of any such part thus declared to be invalid or unconstitutional, whether there be one or more parts.

III.

All ordinances or parts of ordinances inconsistent or in conflict herewith are, to the extent of such inconsistency or conflict, hereby repealed.

IV.


Any person who shall intentionally, knowingly, recklessly, or with criminal negligence, violate any provision of this Ordinance shall be deemed guilty of a misdemeanor and, upon conviction, shall be fined in accordance with the applicable penalty provided for in Section 1.106 of the City of Katy Code of Ordinances. Each day of violation shall constitute a separate offense.

V.

The City Secretary is authorized to publish a summary or the caption of this Ordinance as required by law.

PASSED AND APPROVED this the 27th day of October, 2014.

CITY OF KATY, TEXAS




Fabol Hughes, Mayor

ATTEST:



Melissa A. Bunch, City Secretary

APPROVED:

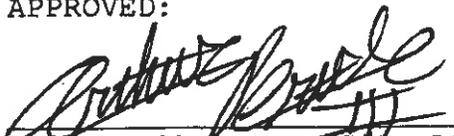

Art Pertile, III, City Attorney

MASTER PLANNED COMMUNITY DESIGN STANDARDS

1. Ingress and Egress

- a. All subdivisions shall have two (2) public ingress and egress rights-of-way or one (1) divided public ingress and egress right-of-way with twenty-four (24) foot travel lanes in each direction.
- b. The median of any divided entry shall have a minimum width of five (5) feet and a minimum depth of (20) feet.

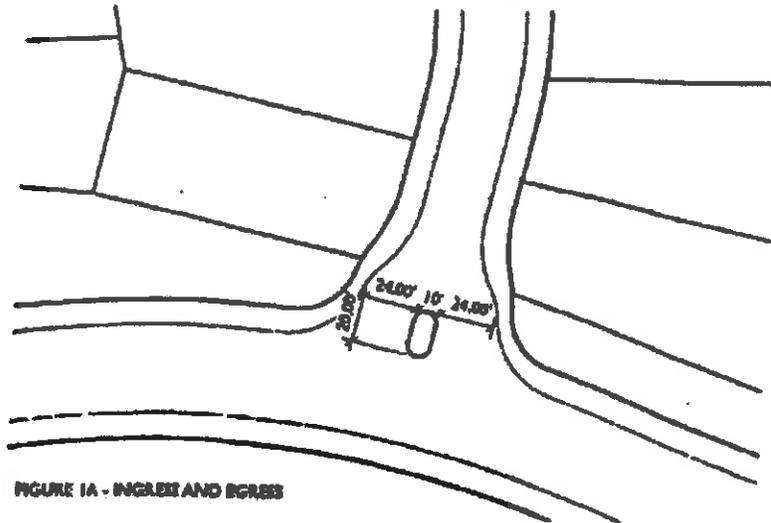


FIGURE 1A - INGRESS AND EGRESS

- c. Any subdivision that utilizes the divided entry shall provide an emergency access as detailed below. The emergency access shall be 24-feet wide and have a traffic load rating of H-20 as specified by the American Association of State Highway and Transportation Officials (AASHTO). The City of Katy Fire Department shall be provided with 24 hour access across the emergency access.

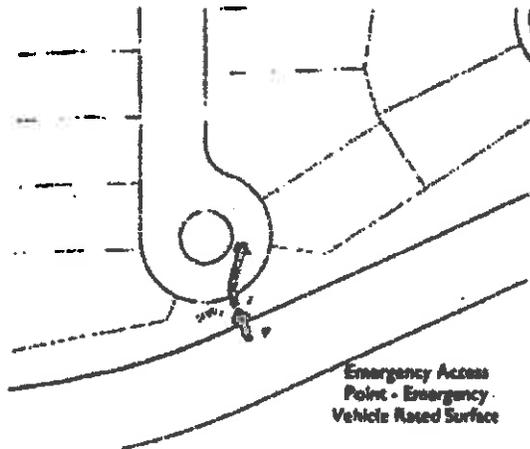


FIGURE 15 - EMERGENCY ACCESS

2. Major Thoroughfares

- a. Major thoroughfares shall have a right-of-way width of one hundred (100) feet. Curves in major thoroughfares shall have a minimum centerline radius of five hundred (500) feet. Reverse curves in major thoroughfares shall be separated by a minimum tangent of one hundred (100) feet.
- b. Major thoroughfares shall have a pavement width of forty four (44) feet to sixty four (64) feet measured from back of curb to back of curb.

3. Collector Streets

- a. Collector streets shall have a right-of-way width of sixty (60) feet. Curves in collector streets shall have a minimum centerline radius of three hundred (300) feet. Reverse curves in collector streets shall be separated by a minimum tangent of seventy five (75) feet.
- b. Collector streets shall have a pavement width of thirty eight (38) feet measured from back of curb to back of curb.

4. Residential/Minor Streets

- a. Residential streets shall have a right-of-way width of fifty (50) feet. Curves in residential streets shall have a minimum centerline radius of one hundred (100) feet.

Reverse curves in residential streets shall be separated by a minimum tangent of fifty (50) feet.

- b. Residential streets shall have a pavement width of either thirty (30) feet or thirty-two (32) feet measured from back of curb to back of curb at the option of the developer.

Street Classification	Right-of-Way Width	Centerline Curve Radius Minimum	Tangent Length Minimum	Pavement Width (Min./Max.)
Major Thoroughfare	100'	500'	100'	44'/64'
Collector Street	60'	300'	75'	38'
Residential Street	50'	100'	50'	30'/32'

5. Block Length

Block length shall not exceed the following:

- a. Block length along major thoroughfares shall not exceed two thousand six hundred (2,600) feet.
- b. Block length along collector streets shall not exceed two thousand (2,000) feet.
- c. Block length along residential streets shall not exceed one thousand four hundred (1,400) feet.

6. Block Length Exceptions

The following exceptions shall apply to the block length requirements established herein for collector and residential streets:

a. Pipelines

The crossing of a single existing pipeline shall not be required more than once every two thousand (2,000) feet.

The crossing of multiple existing pipelines shall not be required more than once every one-half (1/2) mile.

b. Drainage Easements

The crossing of an existing or proposed drainage channel shall not be required more than once every two thousand (2,000) feet.

7. Block Loading

a. Blocks may include up to twenty eight (28) lots on each side of the street.

8. Intersection Radius

a. All intersections shall have a minimum twenty five (25) foot radius at each corner.

b. Parking shall not be permitted along any intersection radius.

9. Intersection Radius (Cul-de-sac)

a. The right-of-way return radius at cul-de-sacs shall be twenty five (25) feet.


b. Parking shall not be permitted along the right-of-way return radius at cul-de-sacs.

10. Cul-de-sac Street Length

a. Cul-de-sac streets may include up to thirty five (35) lots; however a cul-de-sac street shall not exceed one thousand two hundred (1,200) feet in length.

11. Cul-de-sac Turnaround

a. Cul-de-sac streets shall have a paving area of not less than eighty five (85) feet in diameter measured from back-of-curb to back-of-curb and one hundred (100) feet in diameter measured at the right-of-way.

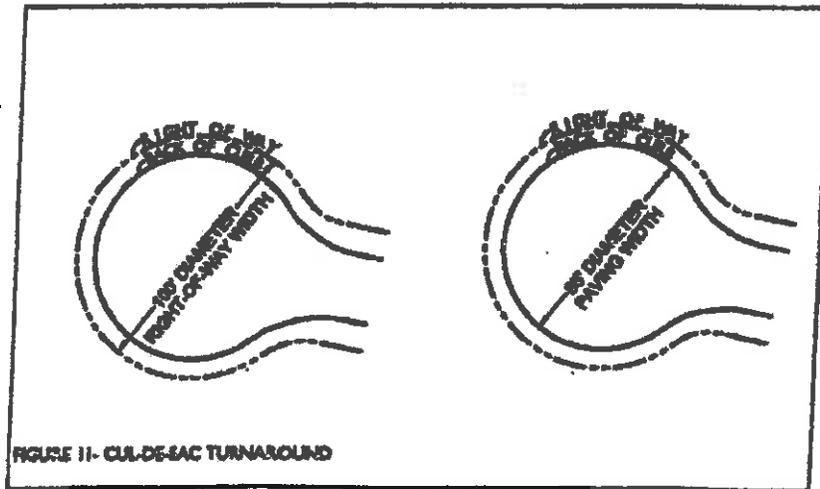

12. Sidewalks

a. Sidewalks along public streets shall be installed as follows:

- 1) Sidewalks four (4) feet in width shall be provided on both sides of the street; or
- 2) One sidewalk eight (8) feet in width shall be provided along one side of the street;
- 3) One sidewalk the minimum width required by the American with Disabilities Act shall be provided along the perimeter of the Master Planned Community that abuts an existing right-of-way and is within one-half mile from the property line of any elementary school or within one mile from the property line of any junior high or high school.

b. Sidewalks adjacent to open space areas may meander between the right-of-way and open space when desired.


13. Alleys

a. Alleys, where provided, shall have a minimum twenty (20) foot right-of-way and a minimum twelve (12) foot paving width, with a topped surface in accordance with the City of Katy standards of construction as contained in Article 9.500 of the Katy Code of Ordinances.

- b. Where two (2) alleys intersect or turn at a right angle, a return radius of ten (10) feet from the normal intersection of the property or easement line shall be provided along each property or easement line.

14. Curb Design

- a. A six (6) inch stand-up curb shall be provided for all major thoroughfares and collector streets.
- b. A four by twelve (4 x 12) inch rollover curb shall be provided for all residential streets.

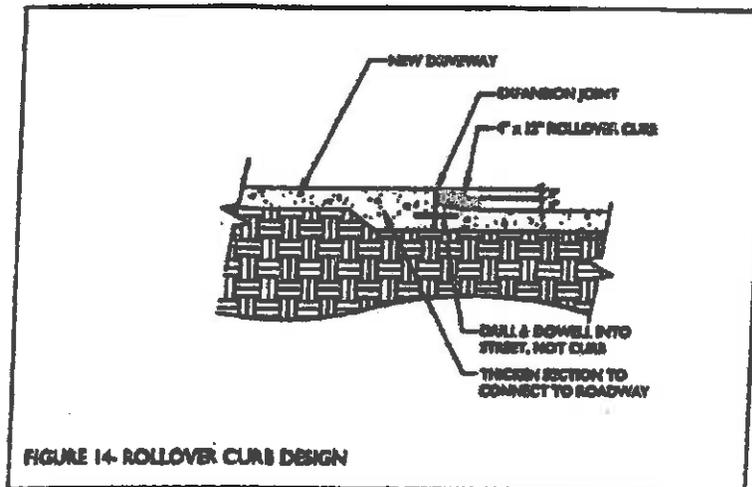

Single Family Lot Standards

1. Lot Width Cap

- a. Lots having a minimum width of less than fifty five (55) feet shall not exceed twenty-five percent (25%) of the total lots in the community.
- b. Lots having a minimum width of less than seventy (70) feet shall not exceed seventy percent (70%) of the total lots in the community.
- c. Lots having a minimum width of seventy (70) feet or greater shall comprise at least thirty percent (30%) of the total lots in the community.

2. Minimum Lot Dimensions

- a. All residential lots shall have a minimum width of fifty (50) feet, measured at the building line.
- b. Residential lots shall have a minimum depth of one hundred twenty (120) feet.
- c. Residential lots shall have a minimum area of six thousand (6,000) square feet per lot.
- d. Flag lots are prohibited.

3. Building Setbacks

a. Front Yard Setbacks

- 1) Major Thoroughfares - Lots shall not front on major thoroughfares.
- 2) Collector Streets – Lots that front on collector streets shall have a minimum front setback of twenty five (25) feet.
- 3) Residential Streets – Lots that front on residential streets shall have a minimum front setback of twenty (20) feet.

b. Side Yard Setbacks (Interior)

- 1) Major Thoroughfares - Lots shall not front on major thoroughfares.
- 2) Collector Streets – Lots that front on collector streets shall have a minimum side yard setback of five (5) feet.
- 3) Residential Streets – Lots that front on residential streets shall have a minimum side yard setback of five (5) feet.
- 4) An interior side yard setback of zero (0) feet shall be permitted provided that all dwelling units maintain a minimum wall to wall separation of ten (10) feet. No portion of a building may cross a property line.

c. Corner Lots

- 1) Major Thoroughfares - Lots adjacent to major thoroughfares shall have a minimum side setback of twenty (20) feet where the lot abuts the major thoroughfare. Lots adjacent to major thoroughfares shall have at least a fifteen (15) foot greater width than the adjacent lot.

- 2) **Collector Streets** – Lots adjacent to collector streets shall have a minimum side setback of ten (10) feet where the lot abuts the collector street. Lots adjacent to major thoroughfares shall have at least a ten (10) foot greater width than the adjacent lot.
- 3) **Residential Streets** – Lots adjacent to residential streets shall have a minimum side setback of ten (10) feet where the lot abuts the residential street. Lots adjacent to major thoroughfares shall have at least a ten (10) foot greater width than the adjacent lot.

Street Classification	Front Building Line	Interior-side Building Line	Corner Building Line
Major Thoroughfare	Prohibited	Prohibited	20'
Collector Street	25'	5'/0*	10'
Residential Street	20'	5'/0*	10'

* An interior side yard setback of zero (0) feet shall be permitted provided that all dwelling units maintain a minimum wall to wall separation of ten (10) feet. No portion of a building may cross property line.

- 4. **Building Height**
Buildings shall not exceed thirty five (35) feet in height and shall not exceed two and one-half (2-1/2) stories.
- 5. **Floor Area**
Each dwelling unit shall have a minimum floor area of not less than one thousand two hundred (1,200) square feet excluding basements, porches and garage areas.

Non-Residential Building Setbacks

Building setbacks for non-residential uses shall be as follows:

Street Classification	Building Line
Major Thoroughfare	25'
Collector Street	25'
Residential Street	25'

Utilities

1. Private Utility Easements

- a. Private utility easements shall be provided at the rear of all lots for the use of private utility lines, conduits, and equipment. These utility easements shall be fourteen (14) feet in width, taking seven (7) feet from each lot where the rear of two (2) lots abut each other, and shall be continuous for the entire length of the block.
- b. Public utilities shall be located within the right-of-way or within a dedicated utility easement provided at the front of all lots when necessary for the use of public utility lines, conduits, and equipment.

2. Sanitary Sewer Manholes

- a. Sanitary sewer manholes spacing shall comply with TCEQ requirements and be located at changes in direction or size of the primary line.

3. Parkland Dedication

- a. No less than twenty (20) percent of the development must be used for open space. Open space shall include parks, landscape reserves, pipeline easements, trails, linear trails, tot lots, natural open space areas, drill sites, and publicly accessible

detention/drainage facilities. Open space maintained by a public entity and/or private recreation centers shall satisfy the City of Katy Parks dedication requirement.

4. Oil and Gas

- a. Sections 4.209, 4.210, and 4.211 of the Katy Code of Ordinances shall not apply to Master Planned Communities.

Architectural Standards

1. Architectural Variety along Street

- a. Chimneys shall be simple in design and proportion and use materials that are consistent with the surrounding wall or appropriate accent materials (stone or brick). Chimney caps should repeat the fascia cornice treatments and integrate the trim colors. Exposed flues are prohibited.
- b. The use of tandem third-car garages is encouraged, rather than three (3) garages side by side, to improve street scene and reduce prominence of garage doors.
- c. In no instance shall there be more than three (3) homes in a row with the same elevation or color scheme.
- d. At a minimum the front elevation of all dwellings shall have recessed windows and entrance doors, or pop-outs or other architectural detailing around windows, entrance doors and garage doors. In addition, the rear or side elevation of any dwelling, when the rear or side elevation faces a collector or major thoroughfare, shall have recessed windows, or pop-outs or other architectural detailing around the windows.
- e. Side and rear elevations of the homes exposed to view from the parks and open space should accommodate design articulation similar to what is presented on the front elevation.

2. Massing and Scale

- a. The primary design components of any building are massing and scale. These components require careful articulation in their architectural expression, particularly where viewed from roads and exposed to public view. There shall be articulation in wall planes both vertically and horizontally. There shall be projections and recesses to provide shadow and depth to wall planes. Buildings shall have simple forms with combinations of one- and two-story elements. Front porches, arcades and second-floor loggias are encouraged to break up two-story masses. Privacy from other houses and adjacent properties should be considered in the siting and design of homes.

3. Exterior Materials/Masonry Requirement

- a. At least 60% of the front façade shall be masonry, and 40% of the overall exterior of each home shall be masonry. In this ordinance the term Masonry shall mean Brick, Brick Veneer, Stone, Stone Stucco and Cultured Stone.
- b. Material changes should not occur on an outside corner, but should be incorporated into the design of the home utilizing masonry columns or recessed windows to conceal the material change.
- c. The number of primary materials on the exterior shall be limited to three (3) not including roof shingles. The following materials may be used:
 - Brick
 - Stone Stucco
 - Cultured Stone
 - Stone
 - Fiber Cement Siding (earth tone colors and horizontal application only)
 - Cedar or Redwood (property stained or preserved and rot resistant)

4. Driveways

- a. Driveways shall be located within the front-yard area of the lot between each side yard. Driveways shall be a minimum of sixteen (16) feet wide at the curb. Driveways may widen within the lot near the garage. When a lot is located with road frontages on two (2) sides the driveway cut shall be located on the lesser-traveled road.

5. Foundations

- a. Foundations that extend above grade more than twelve (12) inches shall be covered with the same material used in the façade of the home or the base of the home shall be clad in stone to a height of three feet to provide a substantial and solid base.

6. Garages

- a. Front-loaded garage doors shall be recessed from the front façade of the home a minimum of twelve (12) inches. Garages shall be limited to three (3) cars in width. Where appropriate, swing-in or side-entry garage arrangements are encouraged to create visual interest and variety to the street scene.
- b. Garage façades that face the street when a side-entry garage is used shall incorporate design elements, including windows, to blend the garage into the house design. The use of metal sectional doors is recommended due to the climate. Wood garage doors are prohibited.

7. Porches

- a. Porches are an important element because they contribute to the enjoyment of the outdoors by providing shade and shelter. They lend shadow and depth to exterior walls and present a human-scale element to the street. Porches shall be enclosed by stucco arcades or colonnades and be roofed with the same materials as the remainder of the home.

8. Balconies

- a. The use of balconies is encouraged. They shall be incorporated into the building form to articulate and provide visual interest to large wall masses. The railings shall be consistent in character and detail to the rest of the structure.

9. Chimneys

- a. Chimneys shall be simple in design and proportion and use materials that are consistent with the surrounding wall or appropriate accent materials (stone or brick). Chimney caps should repeat the fascia cornice treatments and integrate the trim colors. Exposed flues are prohibited.

10. Roofs

- a. All roofs shall use simple pitched-roof forms ranging in slope from 3:12 to 6:12. A flat roof or mansard roof shall be prohibited unless such a roof is a secondary roof form on the structure. For all roofs, both vertical and horizontal articulation is encouraged. Roof articulation may be achieved by changes in plane through the use of traditional roof forms such as gables, hips and dormers.
- b. Concrete or clay tile or other Class A-type roofing materials of a similar appearance shall be used on all sloped roofs. Several styles and colors of roofing materials should be offered and should be interspersed throughout a development. Any area of a roof that uses a flat-roof design shall incorporate a parapet wall or cornice element on all sides of the area. Wood shingle, wood shake and asphalt shingle roof surfaces are not allowed.
- c. Overhanging eaves or a projecting cornice detail shall be incorporated into the design of dwellings as a means of reducing heat buildup from the sun and adding protection to the sidewalls of the dwelling.
- d. Solar panels may be installed. Solar panels shall be of a non-reflective material and colored to match the colors chosen for the home. Mechanical equipment and meters shall be screened from view. No equipment shall be allowed on the roof with the exception of solar panels.
- e. Skylights are permitted provided they are suitably integrated into roof designs and are flush-mounted.

11. Gutters and Downspouts

- a. Exposed gutters shall be colored to match or complement the building surface to which they are attached.

12. Mail Boxes

- a. Housing for mailboxes shall be placed in clustered groups.

13. Trash

- a. Trash receptacles for single-family homes shall be stored within the enclosed garage or screened from the public right-of-way behind a wall or solid fence.

14. Lighting

- a. **Exterior building lighting is allowed although excessive fugitive light should be avoided.**
- b. **Pole mounted light fixtures are prohibited in front yards. Pole mounted fixtures are allowed in rear yards, although the lights shall be installed no higher than the lowest elevation of the lot privacy wall.**
- c. **Up lighting of buildings and structures is allowed. Lighting sources from up lighting utilized in the front of the home shall not be visible. Colored and neon lighting is prohibited.**

AMENDMENT TO MASTER PLANNED COMMUNITY DISTRICT

ORDINANCE NO. 2655

AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF KATY, TEXAS, AMENDING THE CITY OF KATY ZONING ORDINANCE NO. 621; ADDING A NEW SECTION 14.1-11 TO PERMITTED USES IN A MASTER PLANNED COMMUNITY DISTRICT (MPC) TO ALLOW FOR RESTAURANTS WHOSE SERVICE INCLUDES THE SALE OF ALCOHOL; REPEALING ALL ORDINANCES AND PARTS OF ORDINANCES IN CONFLICT HERewith; PROVIDING FOR SEVERABILITY AND PROVIDING FOR A FINE IN AN AMOUNT UP TO TWO THOUSAND DOLLARS A DAY FOR EACH DAY OF A VIOLATION OF THIS ORDINANCE.

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF KATY, TEXAS:

I.

That the City of Katy's Zoning Ordinance No. 621 is hereby amended by adding a new Section 14.1-11 Master Planned Community District (MPC) as set forth below:

ADDITIONS

DELETIONS

14.1 Uses Permitted.

14.1-11 Restaurants, cafes or cafeterias who service includes the sale of alcoholic beverages by the drink, provided such uses are in compliance with the distance requirements from other uses provided for by state law or City ordinance.

II.

In the event any clause phrase, provision, sentence, or part of this Ordinance or the application of the same to any person or circumstances shall for any reason be adjudged invalid or held unconstitutional by a court of competent jurisdiction, it shall not affect, impair, or invalidate this Ordinance as a whole or any part or provision hereof other than the part declared to be invalid or unconstitutional; and the City Council of the City of Katy, Texas, declares that it would have passed each and every part of the same notwithstanding the omission of any such part thus declared to be invalid or unconstitutional, whether there be one or more parts.

III.

All ordinances or parts of ordinances inconsistent or in conflict herewith are, to the extent of such inconsistency or conflict, hereby repealed.

IV.

Any person who shall intentionally, knowingly, recklessly, or with criminal negligence, violate any provision of this Ordinance shall be deemed guilty of a misdemeanor and, upon conviction, shall be fined in accordance with the applicable penalty provided for in Section 1.106 of the City of Katy Code of Ordinances. Each day of violation shall constitute a separate offense.

V.

The City Secretary is authorized to publish a summary or the caption of this Ordinance as required by law.

PASSED AND APPROVED this the 25th day of August, 2014.

CITY OF KATY, TEXAS



Fabol Hughes, Mayor

ATTEST:



Melissa A. Bunch, City Secretary

APPROVED:



Art Cortile, III, City Attorney